



LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
FX	00	A	REVISED PER ECO-10-000500	20JAN2010	MBH	BB
		A1	REVISED PER ECO-12-015851	05SEP2012	DLD	SLM
		A2	REVISED PER ECO-13-005998	05APR2013	DLD	SLM
		B	REVISED PER ECO-20-006565	12MAY2020	AB	AS



SCALE 5:1

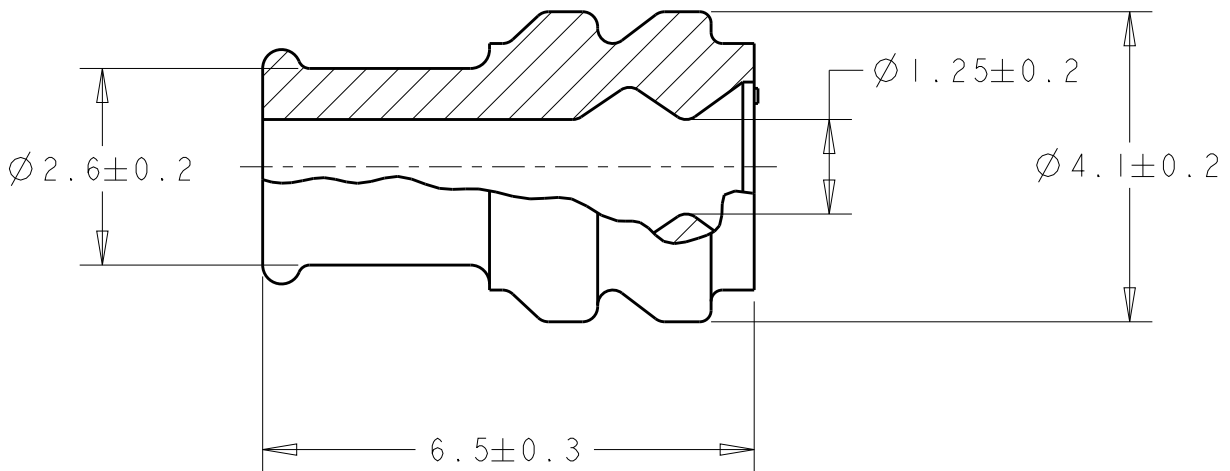

- FOR INSULATION $\varnothing 1.35$ TO $\varnothing 2.1$ mm.
- MATERIAL: SILICONE
COLOR: RED
- INSULATION CRIMP MEASUREMENTS ARE DEPENDENT ON WIRE INSULATION TYPE AND OUTSIDE DIAMETER. INSULATION CRIMP MUST BE SUFFICIENT TO KEEP SEAL FROM SLIDING OUT OF CRIMP WHEN INSERTING INTO CONNECTOR CAVITY BUT NOT TEAR THE SEAL.

2098582-1

PART NUMBER

20
RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

BY -

© COPYRIGHT 20

DIMENSIONS: mm	DWN HARISH.M	22OCT2009	MATERIAL	-	FINISH	-
	CHK B.BUCHTER	22OCT2009	TE Connectivity			
TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD B.BUCHTER	22OCT2009				
0 PLC ±	PRODUCT SPEC	-	NAME MCON CABLE SEAL, 50 DURO-METER SILO 3.45 - 3.70mm DIAMETER			
1 PLC ±	APPLICATION SPEC	-	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
2 PLC ±			A4	00779	C=2098582	-
3 PLC ±			Customer Drawing			
4 PLC ±	WEIGHT	-	SCALE	10:1	SHEET	1 OF 1
ANGLES ±°			REV B			

