
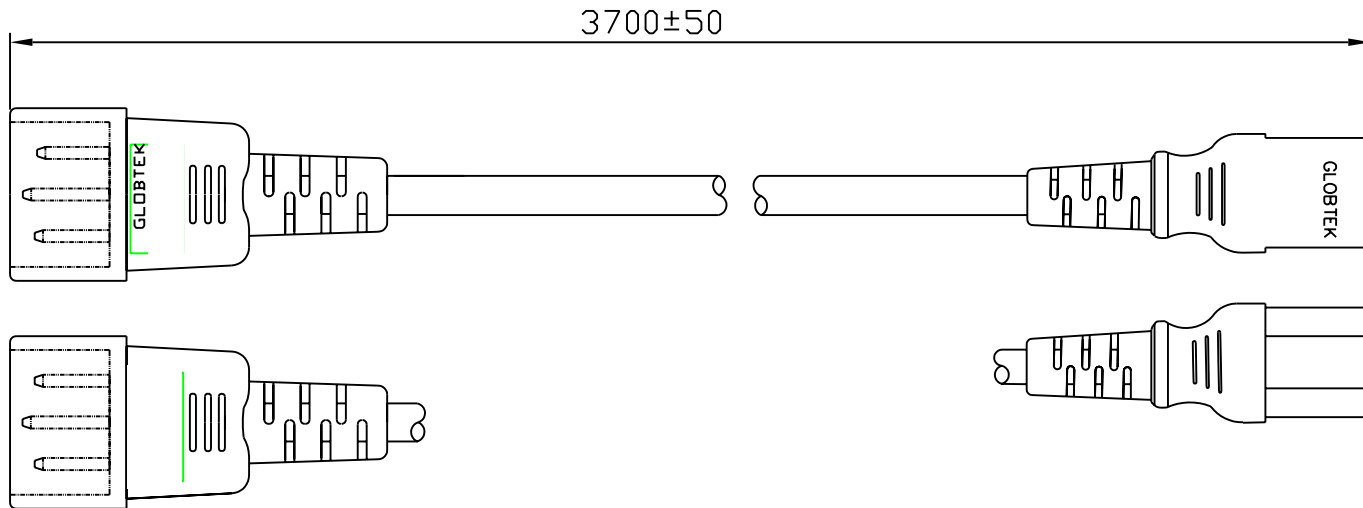



PROPRIETARY INFORMATION:  
 PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR  
 USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY  
 PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE, RFS. 20181, JN	12/20/10	BS

**A**



**B**



**GENERAL SPECIFICATIONS:**

- RATING: 10A / 250V
- CABLE TYPE / SIZE: SVT, 18 AWG X 3 CONDUCTORS
- TEMPERATURE RATING: 105° C
- CONDUCTOR COLORS: BLACK / WHITE / GREEN
- CABLE JACKET COLOR: BLACK
- OVERALL LENGTH (L): 3700± 50 mm
- CABLE OUTER DIAMETER: 6.3 ± 0.1 mm
- END 'A' PLUG; IEC 320 / C14 MALE
- END 'B' IEC 320 / C13 FEMALE
- APPROVALS PLUG: UL, CSA OR cUL
- APPROVALS CABLE: UL, CSA OR cUL
- APPROVALS CONNECTOR: UL, CSA OR cUL

**PACKING:**

BULK PACK

**NOTES:**

1. CORD, PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).



DASH NO.	PART NO	REV.	DESCRIPTION	NOTES
<b>TABULATION BLOCK</b>				
TOLERANCES:		<b>GlobTek, Inc.</b> 186 Veterans Dr. Northvale, NJ 07647 www.globtek.com Tel. 201-784-1000 Fax 201.784.0111		
DECIMALS .xx +/- 0.1		ANGULAR +/- 1°		
.xxx +/- .005				
MILLIMETERS .xx +/- 0.3		ANGULAR +/- 1°		
.xxx +/- .013				
INIT.BY: JN	DATE: 12/20/10	FSCN No.: G, CC	SIZE: A	REV. A
DRAWN: NF	DATE: 12/20/10	DWG TITLE: NORTH AMERICAN DETACHABLE CORDSET		
APRVD: HM	DATE: 12/20/10	SCALE: NONE	PART NO: 70114512F705(R)	SHEET 1/1

Foot Note:  
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.

Limitation of Use:  
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice