




DESCRIPTION: HIGH DENSITY - FEMALE - RIGHT ANGLE

**ELECTRICAL:**

CURRENT RATING: 3 AMPS  
 CONTACT RESISTANCE: 15 MILLIOhms Max.  
 INSULATION RESISTANCE: 1,000 MEGOhms Min. AT 500VDC  
 WITHSTANDING VOLTAGE: 1,000VAC FOR 1 MINUTE  
 TEMPERATURE: -55°C TO +105°C

**MATERIALS:**

SHELL: STEEL  
 INSULATOR: PBT, (UL94-0)  
 CONTACT: COPPER ALLOY  
 CONTACT FINISH: NICKEL PLATED - ENTIRE CONTACT  
 GOLD - MATING END  
 TIN - TERMINATION END  
 BOARD LOCK: BRASS - TIN PLATED  
 RIVET INSERT: BRASS - NICKEL PLATED

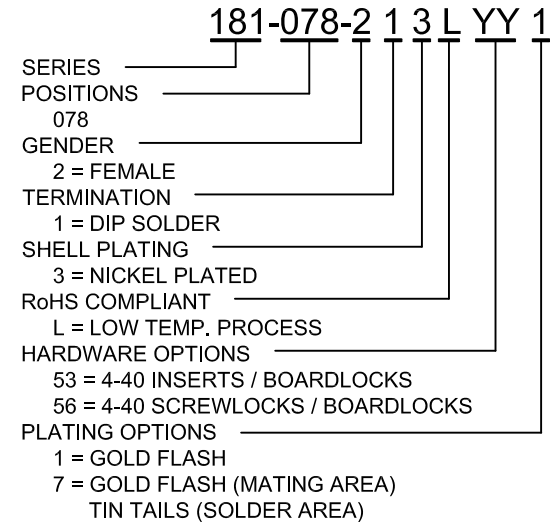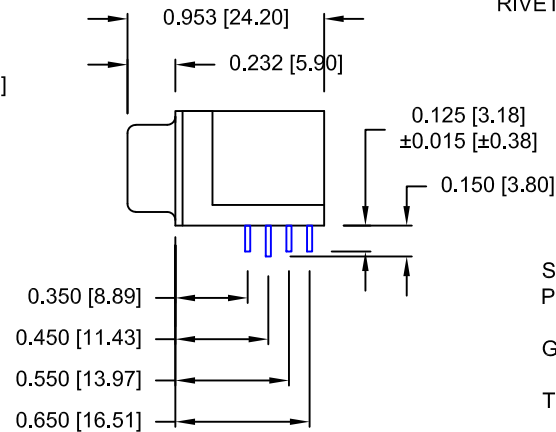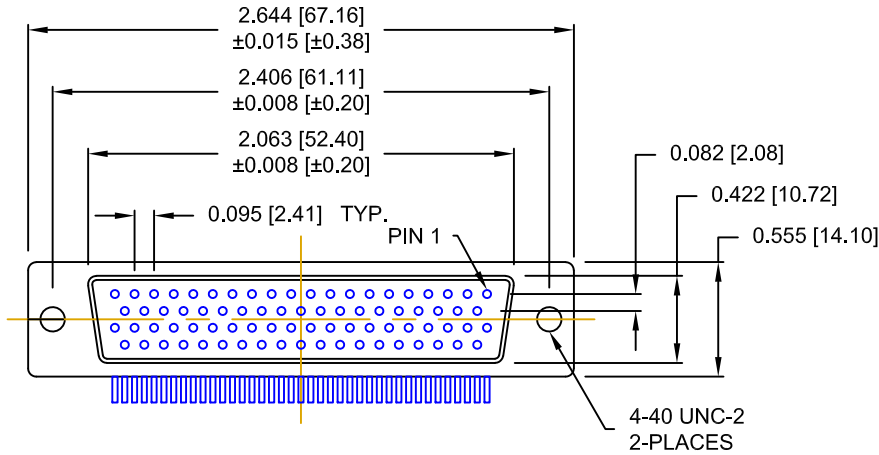





DO NOT SCALE FROM DRAWING

RoHS COMPLIANT


	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: C. SMITH	DATE: 07-01-10
	<h1>NorComp</h1>		CHECKED:	DATE:
SCALE: 1 : 1			SHEET 1 OF 2	REV 3
			DWG NO. 181-078-213LYY1	

DESCRIPTION: PCB LAYOUT - RIGHT ANGLE - FEMALE

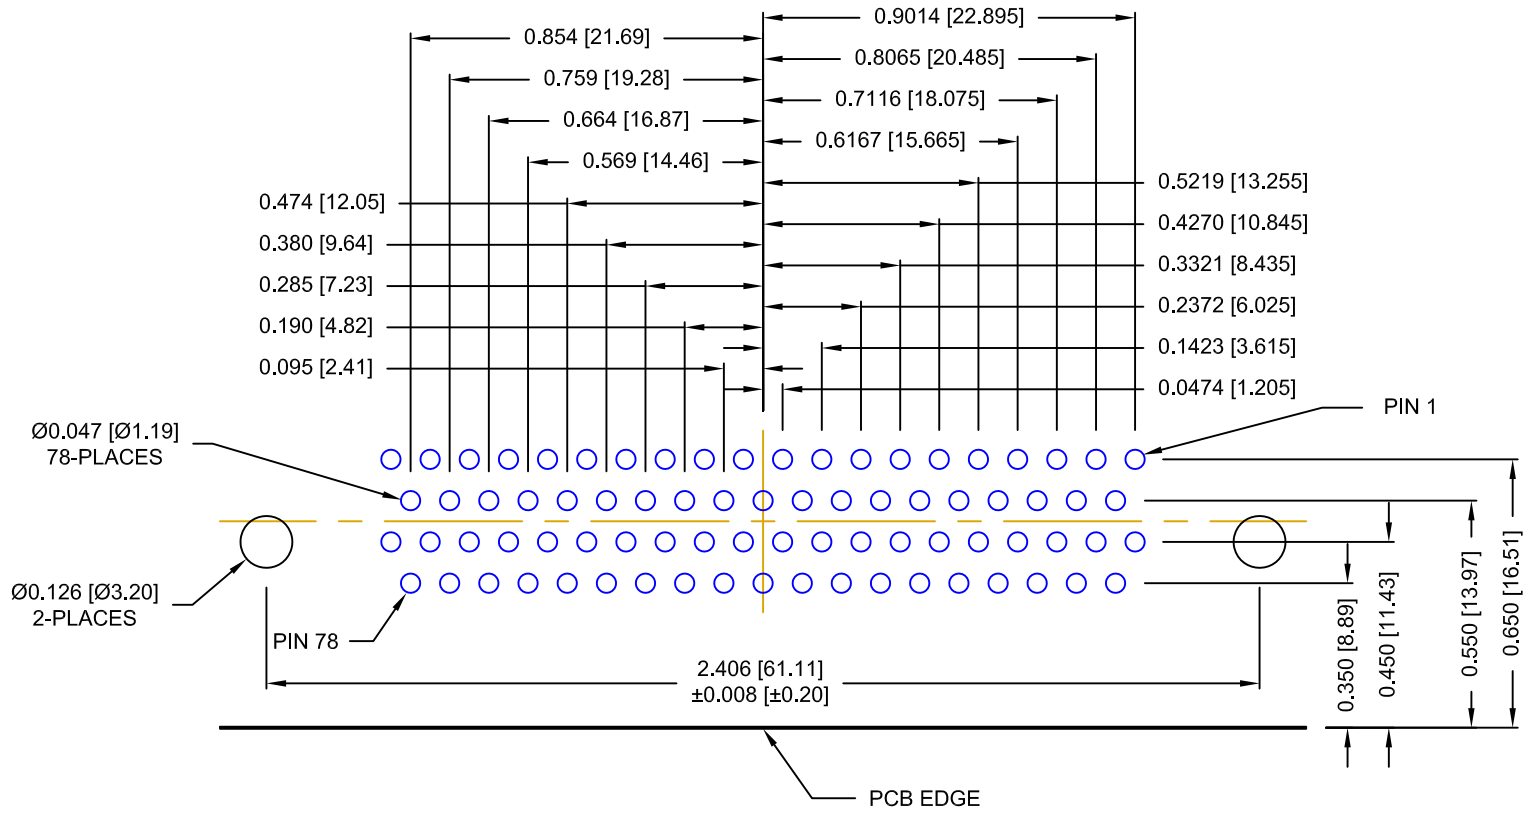

	METAL SHELL FORK BOARD LOCKS
	53 BOARD LOCKS IN FRONT HOLE
	56 BOARD LOCKS IN FRONT HOLE

DO NOT SCALE FROM DRAWING

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: C. SMITH	DATE: 07-01-10
			CHECKED:	DATE:
<b>NorComp</b>		SCALE: 2 : 1	SHEET 2	OF 2
		DWG NO. 181-078-213LYY1		