


Data sheet | Item number: 210-878

Marking strips; for TP printers; permanent adhesive; 100 mm; white

www.wago.com/210-878

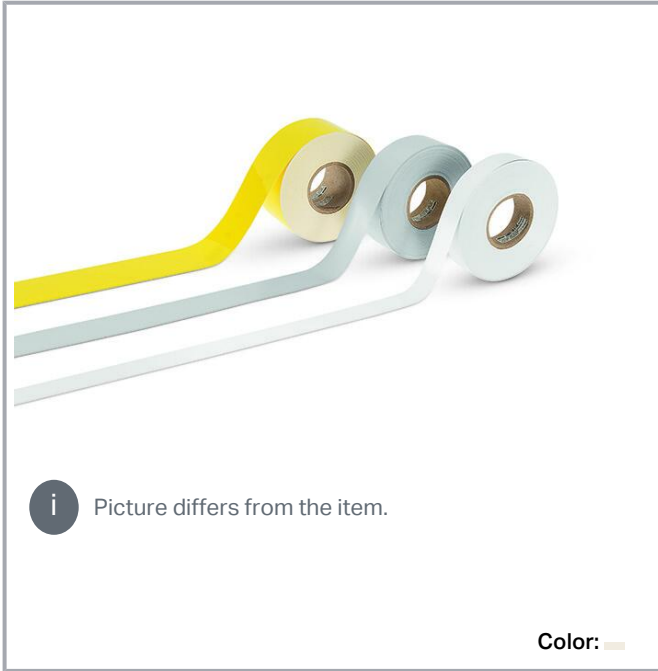

Data

Technical data

Suitable	for TP 298+
Marking method	Thermal transfer
Marking	plain
Delivery form	Roll
Delivery form configuration	20 m; 1 line
Printing device	TP 298+

Physical data

Width	100 mm
Depth	0.2 mm
Strip width	99 mm

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Mechanical Data

Mounting type	Sticking
Smear resistance	in conjunction with 258-5005 Ink Ribbon

Material Data

Color	white
Material	Polyester
UV resistance	EN 60068-2-5:2010 Procedure B
Adhesive information	Acrylic; permanent
Halogen-free	Yes
Weight	0 g

Environmental requirements

Ambient temperature (storage)	+10 ... +21 °C
Ambient temperature (operation)	-40 ... +150 °C
Relative humidity	40 ... 50 %

Commercial data

eCl@ss 10.0	27-40-06-29
eCl@ss 9.0	27-40-06-29
ETIM 8.0	EC001288
ETIM 7.0	EC001288
PU (SPU)	1 pcs
Packaging type	box
Country of origin	DE
GTIN	4055143378956
Customs tariff number	39199080888

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Downloads

Environmental Product Compliance

Compliance Search

Subject to changes. Please also observe the further product documentation!

Data sheet | Item number: 210-878

www.wago.com/210-878



URL

Download

Environmental Product Compliance 210-878

Marking strips; for TP printers; permanent adhesive; 100 mm; white

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.