

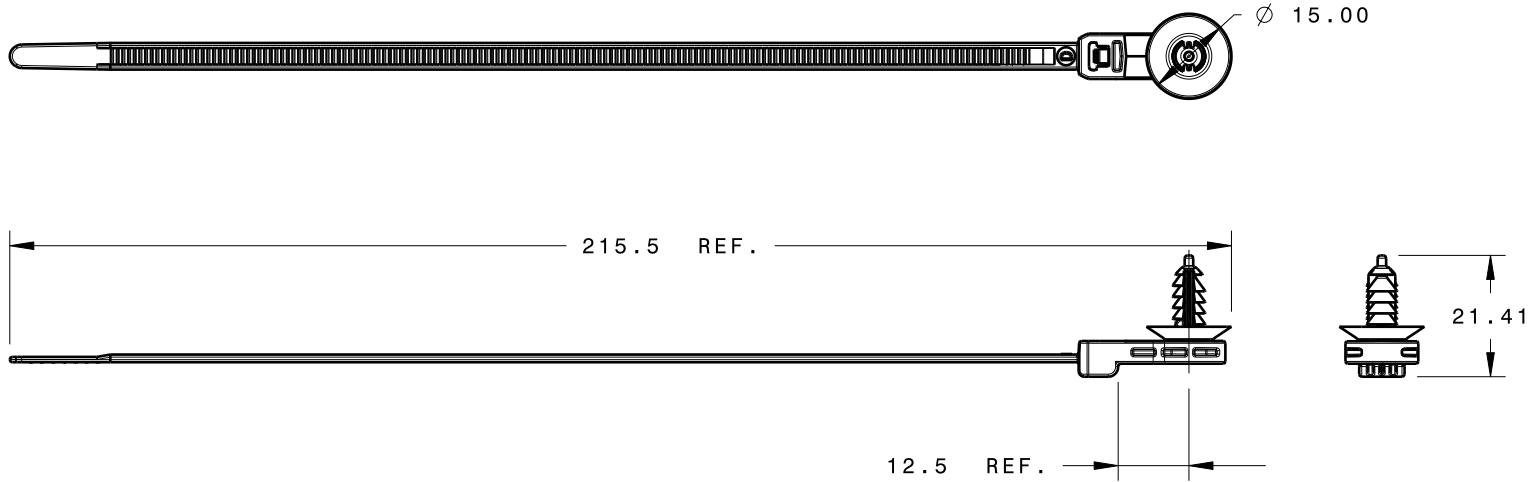


REFERENCE:

PERFORMANCE REQUIREMENTS:

1. FIR TREE PUSH IN FORCE: 10 lbs MAX IN A M6 THREADED HOLE
2. FIR TREE PULL OUT FORCE: 25 lbs MIN IN A M6 THREADED HOLE
3. HOLE DIAMETER: M6 THREADED HOLE
4. PANEL THICKNESS RANGE: 0.6 TO 5.5mm 07
5. CABLE TIE TENSILE STRENGTH: 50 lbs MIN
6. BUNDLE RANGE: 1.6mm TO 50mm

07

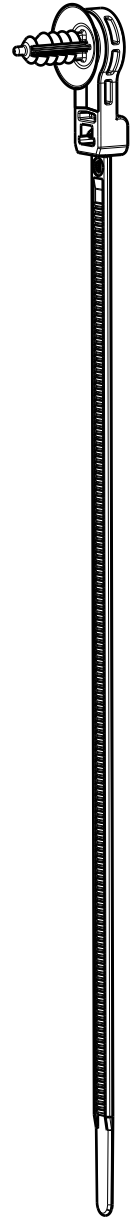

Assembled View  
Scale 1:1

08

MATERIAL	COLOR
PA66HIRHS	GRAY
PA46	BROWN

Isometric view

INVENTORS	<b>HellermannTyton®</b>		DIMENSIONS	TOLERANCES		PART	T50ROSFTM6SO12.5A		DRAWING	FORMAH		CATIA V5		SCALE 3:4				
	ALL PROPRIETARY RIGHTS IN THE SUBJECT MATTER SHOWN ON THIS DRAWING ARE EXCLUSIVE PROPERTY OF HELLERMANN TYTON			REVISIONS	.XXXX = ± 0.25		number			PRODUCTION		VERSION J		CAD		previous drawing number		
	name				.XXX = ± 0.50		name			T50ROS WITH 12.5mm OFFSET AND M6 FIR TREE (A SERIES)		A- SIZE (landscape)_N01		S. ADAMS		P. TRAUTFIELD		
	date				.XX = ± 1.00		material			SEE TABLE		drawn		3/24/11		checked 4/25/11		
	city, state				.X = ± 2.00		units			millimeters		type		CUSTOMER		sheet 1 of 1		
S. Adams		3/24/11		MENOMONEE FALLS, WI.		part level		D		number		10-0533-001-CSU		approved				