

NOTES:


1) LABEL REQUIREMENT:

- LABELS ARE M23053/5 ,WHITE. ACCEPTABLE SUBSTITUTION IS DAT-38-292 OR TRANSVINYL (DAT-63-292-2.5).
- LOCATE APPROXIMATELY AS SHOWN.

2) TEST REQUIREMENT:

IL @ 1310 nm SHALL BE 3.25 dB MAX.

REVISION HISTORY - ALL SHEETS ARE AT THE SAME REVISION			
REV	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	2017/11/13	

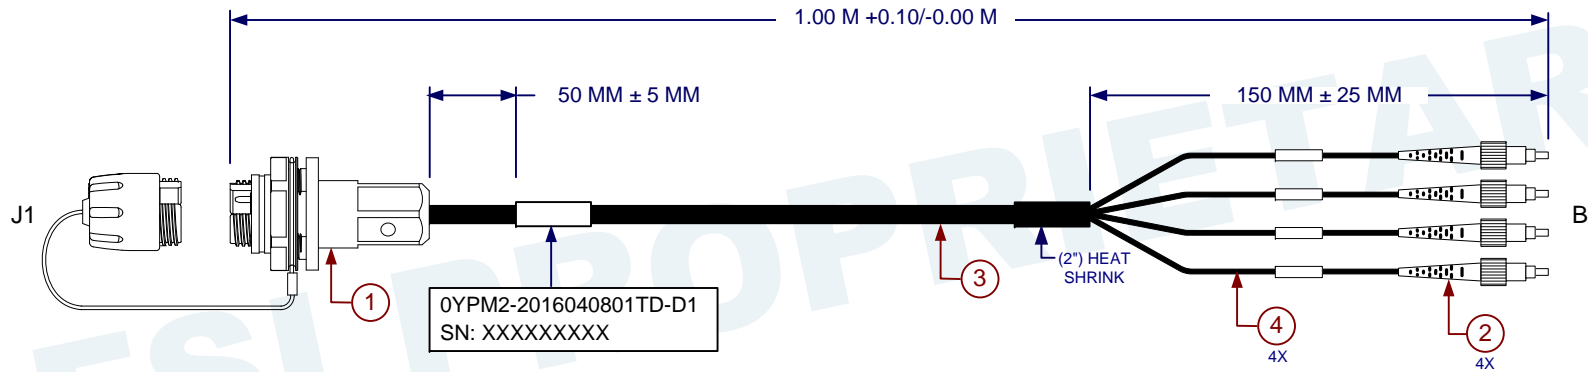

5	AFSI-PRE T BOX	BOX, SMALL FIBER CABLE 10X10X2 W/AFSI GRAPHICS	1
4	BSFT0600	FURCATION TUBE, 2MM ID600UM, BLACK	2 FEET
3	WTTO-0400	CABLE, 4 FIBER 9/125 TACTICAL DISTRIBUTION	3.61 FEET
2	BFCC2000-BL-1	FC SM CONNECTOR, METAL BODY W/CERAMIC FERRULE; BLUE BOOT	4
1	EB4H8280-344A3	4 CH JAM NUT RECEPT, INT MOUNT, SHORT TAC, BLACK ALUM, 1310/1550	1
ITEM NO.	PART NO.	DESCRIPTION	QTY/ LENGTH

J1	PINOUT DIAGRAM	B LABEL INFORMATION
A1	●————●	A1
B1	●————●	B1
A2	●————●	A2
B2	●————●	B2

MATERIAL:		DFTR/Designer: 2017/10/20			
		Check By: B. Waite 2017/10/24			
		Manufacturing: B. Waite 2017/10/24			
		Market Manager/PLM: Q. Abraham 2017/10/25			
DRILLED HOLE DIAMETER TOLERANCE		Configuration Management: L. Brown 2017/11/13	<b>TITLE:</b> 4 CHANNEL TACBEAM JAM NUT RECEPTACLE TO FC ASSEMBLY, SM		
DO NOT SCALE DRAWING UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOL ON ANGLES ±3° 1 PL ±.1 2 PL ±.02 3 PL ±.010 INTERPRET DIM AND TOL PER ASME 14.5M-1994		This Document contains proprietary information and such information is prohibited from disclosure to others, publication or duplication in whole or in part without written permission from Amphenol Fiber Systems International. Copyright © 2017 Amphenol Fiber Systems International. Non published work. All rights reserved.			
NEXT ASSY	USED ON	SIZE: A	CAGE CODE: OYPM2	DWG NO: 2016040801TD-D1	REV: -
APPLICATION		SCALE: NONE		SHEET 1 OF 1	