




1 2 3 4 5 6 7

A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H

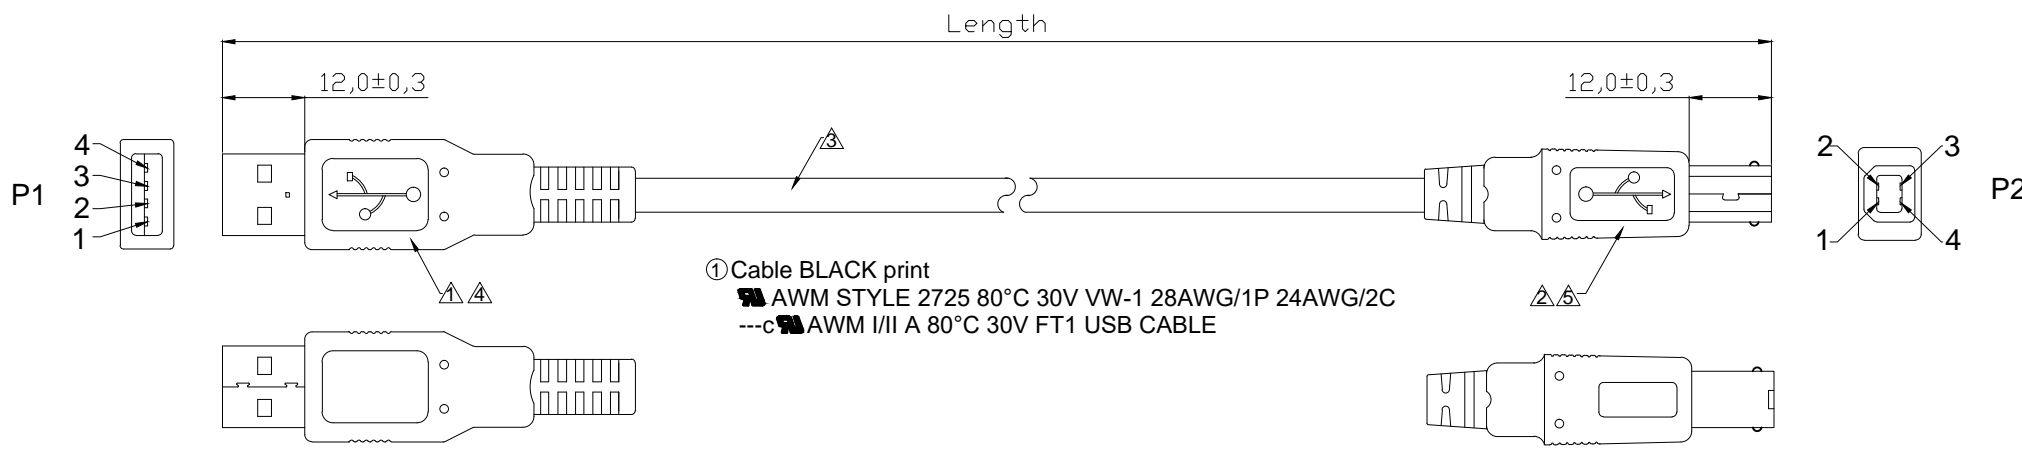

① Cable BLACK print
 AWM STYLE 2725 80°C 30V VW-1 28AWG/1P 24AWG/2C
 ---c AWM I/II A 80°C 30V FT1 USB CABLE

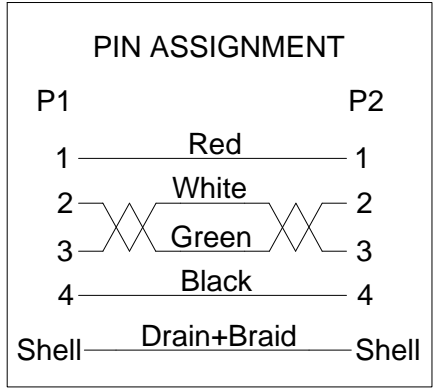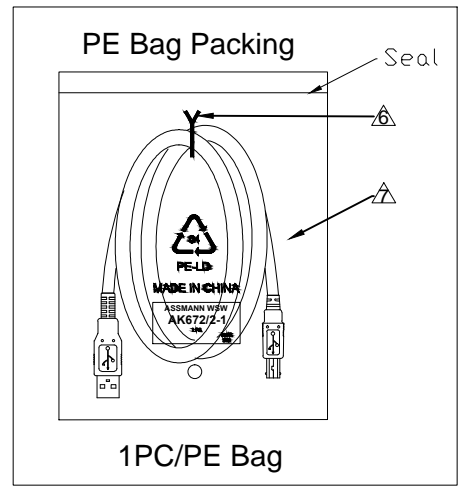

WSW P/N	Jacket color	Length(mm)
AK672/2-1	Beige	1000±30
AK672/2-2	Beige	2000±50
AK672/2-3	Beige	3000±50
AK672/2-5	Beige	5000±50

Electrical test:
 1. 100% short, open, miswire test
 2. Conduct resistance: 2 Ohm max.
 3. Insulator resistance: 10Mohm min.
 4. Dielectric test: DC 300V

①	△	PE Bag	1	Clear Print black "MADE IN CHINA"+ "1PC"
	△	TIE	1	White
②	△	Out Jacket	6g	Beige(BG002) PVC-45P, Flammability class: VW-1
②	△	Out Jacket	6g	Beige(BG002) PVC-45P, Flammability class: VW-1
②	△	Cable	1	Beige(BG002) USB2.0 UL2725 28#/1P+24#/2C+AEB OD:4.7mm, Flammability class: VW-1
②	△	CONN	1	USB 2.0 B Male Shell:Nickel Pin:G/F Insulator color: White, UL 94V-0
②	△	CONN	1	USB 2.0 A Male Shell:Nickel Pin:G/F Insulator color:White, UL 94V-0

RoHS compliant
 Unit: mm

Scale	Free					Date	Name	Customer-No.
TOLERANCE						Drawn	11.02.2014	Amy
						Approved	14.07.2021	Segal
		②	Add the material flammability class	14.07.2021	Segal			ASSMANN WSW-No.
		①	Update the drawing	26.01.2016	Amy			AK672/2-x
		①	Drawn	11.02.2014	Joanna			
		①						Drawing-No.
								ASS 7066 CA
								rev02
Angle	TOL	Id.	Modification	Date	Name			Replace
								Sheet



1 2 3 4 5 6 7