


P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	REV PER ECR 10-005107	08MAR10	JR	TM
	C1	REVISED PER ECO-17-007400	27NOV2017	RS	DR

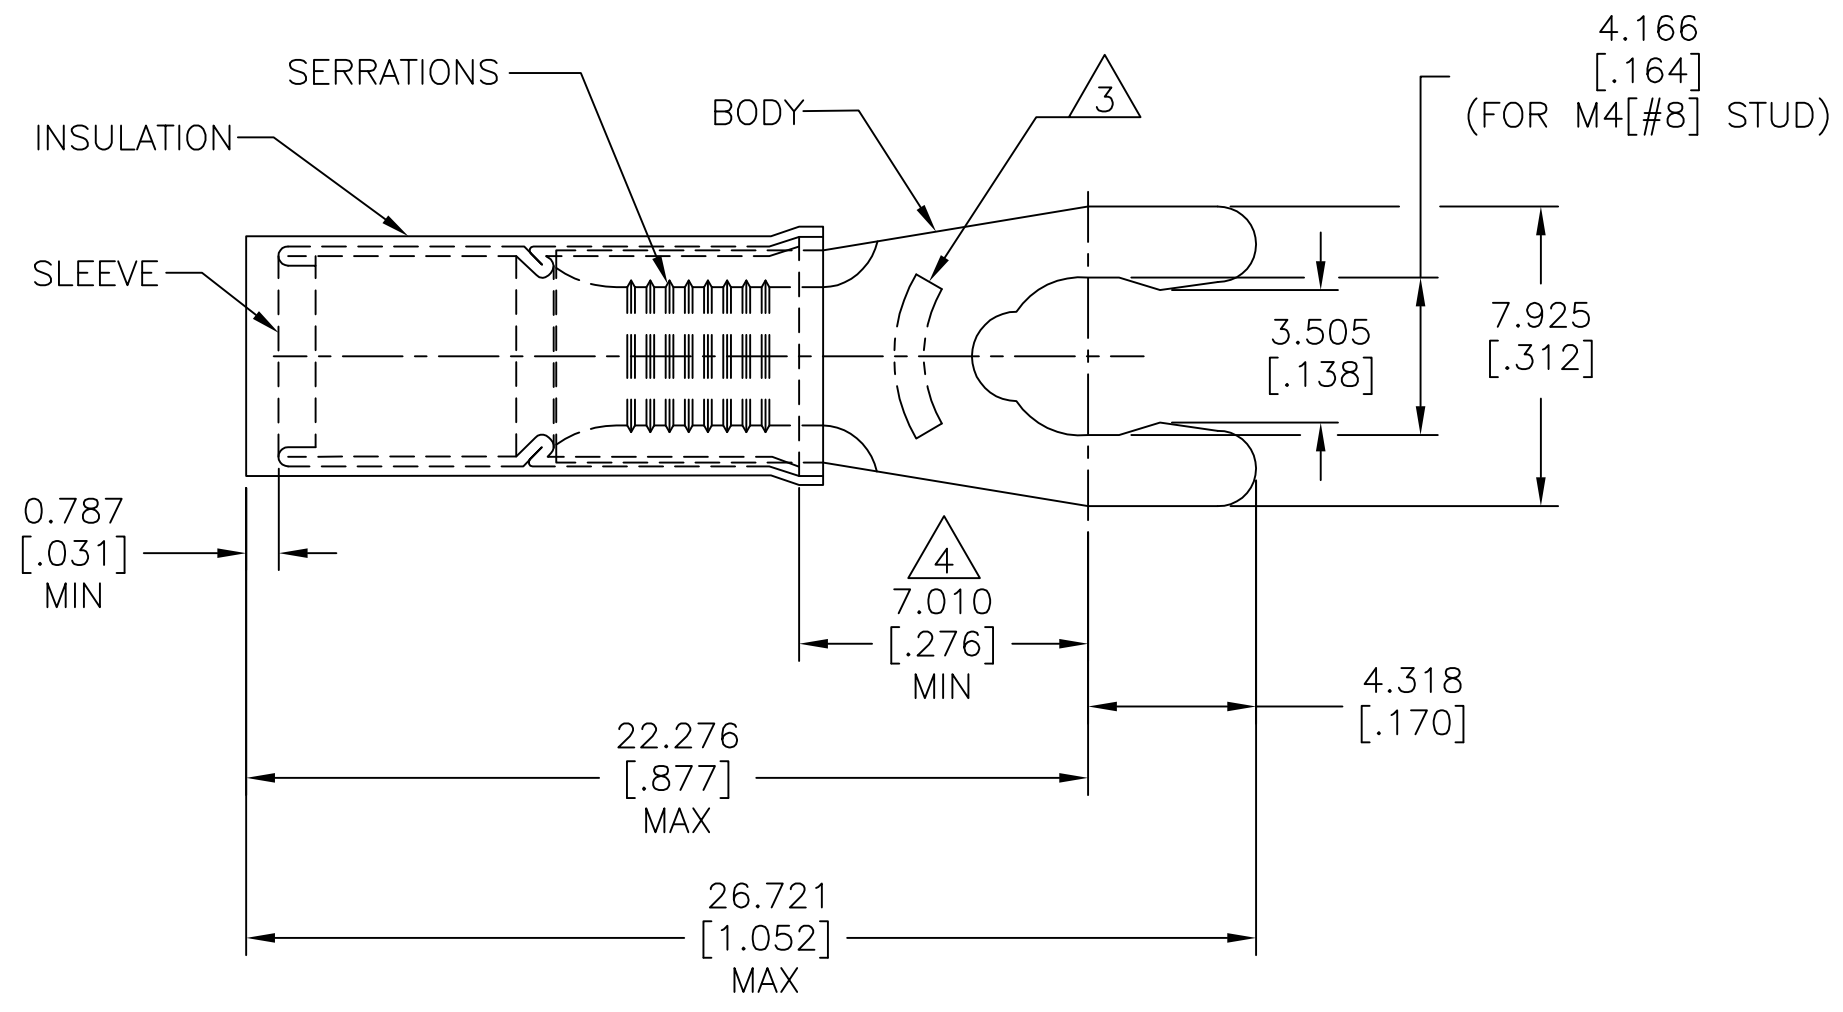

<b>AMP</b> WIRE RANGE	Listed FILE E13288
12-10 AWG SOLID OR STRANDED	12-10 AWG SOLID OR STRANDED

- FOR  $\phi 3.810-6.350[\phi .150-.250]$  WIRE INSULATION.
- BODY MATERIAL THK IS  $0.991 \pm 0.051$   $[\pm .039]$
- STAMP "8S AMP 12-10\*", LOCATED APPROX AS SHOWN.
- APPLIES FROM EDGE OF METAL WIRE BARREL TO CENTER OF STUD HOLE.
- MATERIAL:  
 BODY: PHOSPHOR BRONZE PER ASTM B103  
 SLEEVE: COPPER (ASTM B-152)  
 INSULATION: NYLON.
- FINISH:  
 BODY & SLEEVE: TIN PLATE PER ASTM B545  
 INSULATION: COLOR-YELLOW.

500	LOOSE PIECE	696072-1
QTY	DESCRIPTION	PART NO.

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 105°C[221°F]	THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JR RUTH 12/17/98	TE Connectivity			
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: 300 V MAX	DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK MS FEHER 12/17/98				
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	WIRE CROSS SECTIONAL AREA RANGE: 2.62-6.64mm <sup>2</sup> [5,180-13,100] SOLID OR STRANDED		0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.127[.005] 4 PLC ± - ANGLES ± -	APVD J TALLEY 12/17/98	PRODUCT SPEC UL 486 A-B			
FOR ORDER ENTRY	1-800-526-5142	THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.	MATERIAL △ 5	FINISH △ 6	APPLICATION SPEC 114-2157	SIZE A3	CAGE CODE 00779	DRAWING NO C=696072	RESTRICTED TO -
					CUSTOMER DRAWING	SCALE 5:1	SHEET 1 OF 1	REV C1	