


DB25 AND TRS WIRING CHART				
JACK (CHANNEL)	CABLE (COLOR)	TIP OR RING (RED)	SLEEVE (BLACK)	SLEEVE (BARE)
1	BROWN	24	12	25
2	RED	10	23	11
3	ORANGE	21	9	22
4	YELLOW	7	20	8
5	GREEN	18	6	19
6	BLUE	4	17	5
7	PURPLE	15	3	16
8	GRAY	1	14	2

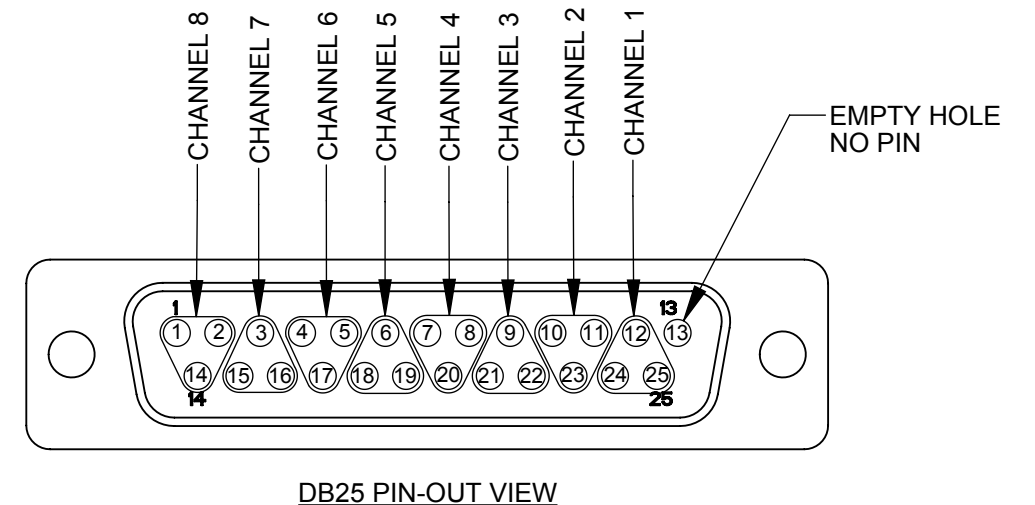

PART NUMBER	CABLE LENGTH "X"
DB25MM10TRS	10.00 FT +/- 1.50 IN
DB25MM12TRS	12.00 FT +/- 1.50 IN
DB25MM15TRS	15.00 FT +/- 2.00 IN

NOTES:

- BREAKOUT CABLE LENGTH: 18.00 +/- 0.75 INCHES.
- THE PRODUCT COMES COILED AND PACKAGED IN A BAG.
- JACKSCREWS ARE SHIPPED UNASSEMBLED. CABLE COMES WITH BOTH #4-40 THREAD (4) AND #M3 THREAD (4) JACK SCREWS.
- MATERIALS:  
 TRS PLUG AND HANDLE - COPPER ALLOY, NICKEL PLATED  
 H.S. TUBING - THERMOPLASTIC  
 DSUB: CABLE CLAMPS - COPPER, NICKEL PLATED  
 SHELL - STEEL, TIN PLATED  
 INSULATORS - THERMOPLASTIC  
 JACKSCREWS - STAINLESS STEEL
- THIS PRODUCT IS RoHS COMPLIANT.

**CUSTOMER DRAWING**

REVISIONS					UNLESS OTHERWISE SPECIFIED 1. ALL DIMENSIONS IN INCHES - TWO PLACE DECIMALS ±0.02 - THREE PLACE DECIMALS ±0.005	THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.						
REV	ECO NUMBER	DATE	BY	APVD		SIZE	WIDTH	MULT	LBS/M	TEMPER		
D	26795	7-8-11	TO	TJK	DO NOT SCALE DRAWING	FINISH SPEC No.				MATERIAL SPEC No.		
C	26757	04/06/11	BL	JEB		FIRST USED ON				SCALE 2:1		
B	26637	10/11/10	RS	TJK		DATE DRAWN	BY	CHKD	APVD			
A	25959	10/6/08	RS	TJK		02/22/08	JGK	RS	TJK			
						NAME				PART No.		REV
					DB25M INSERT CABLE, RoHS				DB25MM__TRS		D	