


EAC



M3



Feed-through terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 4 mm², Width: 6 mm, Colour: Grey

RAL: 7032

Business data

| | |
|--|-----------------------|
| Packaging unit | 100 |
| Quantity unit | PC |
| Weight per piece (not including packaging) | 9.6 g |
| Weight per piece (including packaging) | 10.12 g |
| Unit of weight | G |
| Customs number | 85369010 |
| Country of origin | CZ |
| Prio-Article | 1577.2 |
| Product description | Feed-through terminal |

1577.6

RK 2,5-4/35 GR

Technical data

Dimensions

| | |
|------------------|-------|
| Length | 48 mm |
| Width | 6 mm |
| Height TS 35/7.5 | 47 mm |

Ratings

| | |
|---|-------------------|
| Rated voltage | 800 V |
| Rated current | 32 A |
| Rated cross-section | 4 mm ² |
| Rated impulse voltage | 8 kV |
| Overvoltage category | III |
| Contamination degree | 3 |
| Maximum power dissipation for nominal condition | 1.02 W |

Technical data

Connection data

| | |
|--|---------------------|
| Connection principle | Screw connection |
| Connection position | Lateral |
| Connections | 2 |
| Number of terminals per level | 2 |
| Number of levels | 1 |
| Wire cross-section single-core (rigid) / stranded, min. | 0.2 mm ² |
| Wire cross-section single core (rigid)/stranded, max. | 6 mm ² |
| Wire cross-section stranded, min. | 0.2 mm ² |
| Wire cross-section stranded, max. | 6 mm ² |
| Wire cross-section stranded with wire-end ferrules, min. | 0.2 mm ² |
| Wire cross-section stranded with wire-end ferrules, max. | 4 mm ² |
| Wire cross-section AWG, min. | 22 |
| Wire cross-section AWG, max. | 11 |
| Stripping length | 12 mm |
| Screw head | Slotted |
| Screw threading | M 3 |
| Tightening torque, min. | 0.5 Nm |
| Tightening torque, max. | 1 Nm |

Materials

| | |
|---------------------------|---------------|
| Insulation housing | Polyamide 6.6 |
| Flammability class UL 94 | V-2 |
| Working temperature, min. | -40 °C |
| Working temperature, max. | 105 °C |

Further technical data

| | |
|-------------------------------------|-------------------------|
| Mounting type | Mounting rail TS 35/7,5 |
| Gauge plug acc. to EN 60 947-1 | A4 |
| Number of cross-connection channels | 1 |
| End plate required | ✓ |
| Number of test pick-off options | 1 |

Data sheet

1577.6

RK 2,5-4/35 GR



Technical data

Print

| | |
|--------|------|
| Colour | Grey |
|--------|------|

Environmental Product Compliance

| | |
|---------------|-----|
| REACH Conform | yes |
|---------------|-----|

| | |
|----------------------|------------|
| REACH Reference date | 2021-07-08 |
|----------------------|------------|

| | |
|--------------------------------|----|
| REACH Candidate Substance Note | No |
|--------------------------------|----|

| | |
|--------------|-----|
| RoHS Conform | yes |
|--------------|-----|

1577.6

RK 2,5-4/35 GR

Approvals

CSA approval

| | |
|----------------------------------|--------------|
| CSA File Number | 042110_0_000 |
| CSA approval | C22.2 No 158 |
| CSA approval granted | yes |
| CSA Usegroup C: rated voltage | 600 V |
| CSA Usegroup C: rated current | 32 A |
| CSA wire cross-section AWG, min. | 22 |
| CSA wire cross-section AWG, max. | 10 |
| CSA stripping length | 12 mm |

CSAus approval

| | |
|------------------------------------|--------------|
| CSAus File Number | 042110_0_000 |
| CSAus approval | UL 1059 |
| CSAus approval granted | yes |
| CSAus Usegroup C: rated voltage | 600 V |
| CSAus Usegroup C: rated current | 32 A |
| CSAus wire cross-section AWG, min. | 22 |
| CSAus wire cross-section AWG, max. | 10 |
| CSAus stripping length | 12 mm |

Standards and regulations

| | |
|----------------------|----------------|
| EAC approval | TR ZU 004/2011 |
| EAC approval granted | yes |

1577.6


RK 2,5-4/35 GR

Approvals


KEMA KEUR approval

| | |
|---|---------------------|
| KEMA KEUR approval | EN 60947-7-1:2009 |
| KEMA KEUR approval granted | yes |
| KEMA rated voltage | 800 V |
| KEMA rated current | 32 A |
| KEMA rated impulse voltage | 6 kV |
| KEMA wire cross-section single core (rigid), min. | 0.2 mm ² |
| KEMA wire cross-section single-core (rigid), max. | 6 mm ² |
| KEMA wire cross-section stranded, min. | 0.2 mm ² |
| KEMA wire cross-section stranded, max. | 6 mm ² |
| KEMA torque, min. | 0.5 Nm |
| KEMA torque, max. | 1 Nm |


Media

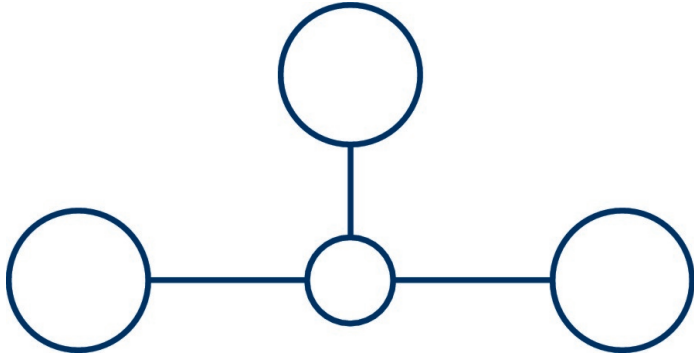

EAC

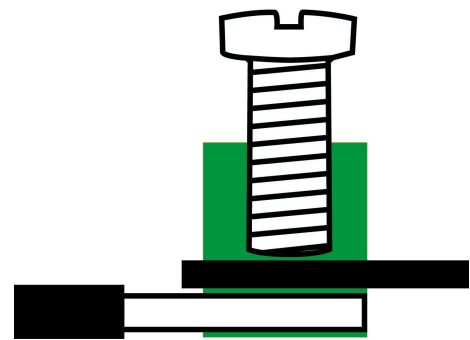

M3



Data sheet

1577.6

RK 2,5-4/35 GR



Accessories

1577.6

RK 2,5-4/35 GR

Cover



Cover, Length: 24 mm, Width: 24 mm,
Colour: Yellow

General order data

| Product number: | Article name | GTIN (EAN) | Packaging unit |
|-----------------|----------------|---------------|----------------|
| 2494.0 | AD 4/24/B/E YE | 4044211052959 | 500 ST |



Cover, Length: 24 mm, Width: 24 mm,
Colour: Yellow

General order data

| Product number: | Article name | GTIN (EAN) | Packaging unit |
|-----------------|--------------|---------------|----------------|
| 2011.0 | AD 4/24/B YE | 4044211048143 | 500 ST |



Cover, Length: 24 mm, Width: 20 mm,
Colour: Yellow

General order data

| Product number: | Article name | GTIN (EAN) | Packaging unit |
|-----------------|----------------|---------------|----------------|
| 2493.0 | AD 4/24/B/E YE | 4044211052942 | 500 ST |

Creation date 25.11.2021 08:17:16
Subject to technical changes

1577.6

RK 2,5-4/35 GR

Cover



Cover, Length: 26.5 mm, Width: 6 mm,
Colour: Yellow

General order data

| Product number: | Article name | GTIN (EAN) | Packaging unit |
|-----------------|--------------|---------------|----------------|
| 2953.0 | AD 1/6/B YE | 4044211056810 | 500 ST |



Cover, Length: 26.5 mm, Width: 6 mm,
Colour: White

General order data

| Product number: | Article name | GTIN (EAN) | Packaging unit |
|-----------------|--------------|---------------|----------------|
| 2965.0 | AD 1/6 WH | 4044211056940 | 500 ST |



Cover, Length: 24 mm, Width: 20 mm,
Colour: Yellow


General order data

| Product number: | Article name | GTIN (EAN) | Packaging unit |
|-----------------|--------------|---------------|----------------|
| 2079.0 | AD 4/24/B YE | 4044211048877 | 500 ST |

1577.6

RK 2,5-4/35 GR

End plate

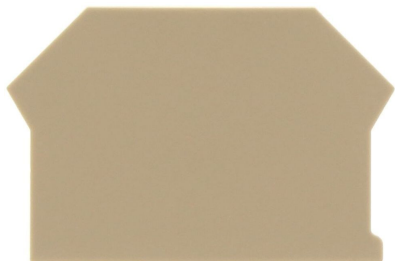

End plate, Width: 1.5 mm, Colour: Beige

General order data

| Product number: | Article name | GTIN (EAN) | Packaging unit |
|-----------------|--------------|---------------|----------------|
| 2001.2 | AP 2,5-10 BG | 4044211047979 | 500 ST |

End stop



End stop, Mounting type: Mounting rail TS 35/7.5, Width: 9.5 mm, Colour: Beige


General order data

| Product number: | Article name | GTIN (EAN) | Packaging unit |
|-----------------|---------------|---------------|----------------|
| 2828.0 | ES 35/K/ST BG | 4044211055547 | 500 ST |

1577.6

RK 2,5-4/35 GR


Cross-connector



Cross-connector, No. of poles: 3, Mounting type: Can be screwed on, Width: 17 mm, Rated cross-section: 4 mm², Colour: natural

General order data


| Product number: | Article name | GTIN (EAN) | Packaging unit |
|-----------------|--------------|---------------|----------------|
| 2020.0 | Q 3 | 4044211048235 | 500 ST |



Cross-connector, No. of poles: 2, Mounting type: Can be screwed on, Width: 10.9 mm, Rated cross-section: 4 mm², Colour: natural

General order data

| Product number: | Article name | GTIN (EAN) | Packaging unit |
|-----------------|--------------|---------------|----------------|
| 2019.0 | Q 2 | 4044211048228 | 500 ST |



Cross-connector, No. of poles: 4, Mounting type: Can be screwed on, Width: 23.1 mm, Rated cross-section: 4 mm², Colour: natural

General order data


| Product number: | Article name | GTIN (EAN) | Packaging unit |
|-----------------|--------------|---------------|----------------|
| 2021.0 | Q 4 | 4044211048242 | 500 ST |

Creation date 25.11.2021 08:17:16
Subject to technical changes

1577.6

RK 2,5-4/35 GR

Cross-connector

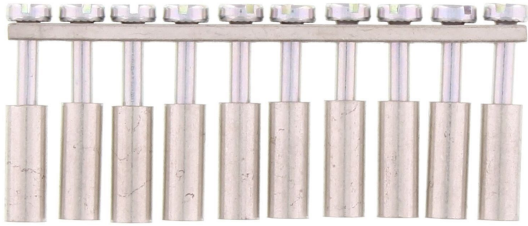

Cross-connector, No. of poles: 10, Mounting type: Can be screwed on, Width: 59.7 mm, Rated cross-section: 4 mm², Colour: natural


General order data

| Product number: | Article name | GTIN (EAN) | Packaging unit |
|-----------------|--------------|---------------|----------------|
| 2022.0 | Q 10 | 4044211048259 | 500 ST |

1577.6

RK 2,5-4/35 GR

Insulated cross-connector



Insulated cross-connector, No. of poles: 4,
Mounting type: Can be screwed on, Width:
21.9 mm, Colour: Yellow

General order data

| Product number: | Article name | GTIN (EAN) | Packaging unit |
|-----------------|--------------|---------------|----------------|
| 2742.2 | QI 4 YE | 4044211054823 | 500 ST |



Insulated cross-connector, No. of poles: 10,
Mounting type: Can be screwed on, Width:
59.7 mm, Colour: Yellow

General order data

| Product number: | Article name | GTIN (EAN) | Packaging unit |
|-----------------|--------------|---------------|----------------|
| 2743.2 | QI 10 YE | 4044211054830 | 500 ST |



Insulated cross-connector, No. of poles: 2,
Mounting type: Can be screwed on, Width:
10.4 mm, Colour: Yellow


General order data

| Product number: | Article name | GTIN (EAN) | Packaging unit |
|-----------------|--------------|---------------|----------------|
| 2740.2 | QI 2 YE | 4044211054809 | 500 ST |

1577.6

RK 2,5-4/35 GR

Insulated cross-connector




Insulated cross-connector, No. of poles: 3,
Mounting type: Can be screwed on, Width:
16.5 mm, Colour: Yellow

General order data

| Product number: | Article name | GTIN (EAN) | Packaging unit |
|-----------------|--------------|---------------|----------------|
| 2741.2 | QI 3 YE | 4044211054816 | 500 ST |

Quick marking



Terminal marker / Pocket Maxicard, Length: 5
mm, Width: 6 mm, Colour: White

General order data

| Product number: | Article name | GTIN (EAN) | Packaging unit |
|-----------------|----------------|---------------|----------------|
| 4702.7 | PMC SB 6/50 WH | 4044211089986 | 500 ST |

1577.6

RK 2,5-4/35 GR

Screwdriver



Screwdriver with bare blade, Colour: Black-grey

General order data

| Product number: | Article name | GTIN (EAN) | Packaging unit |
|-----------------|--------------|---------------|----------------|
| 1086.0 | SDB 0,6x3,5 | 4044211014797 | 500 ST |

Test adapters



Test adapter, Length: 37.3 mm, Pitch size: 6 mm, Colour: Beige


General order data

| Product number: | Article name | GTIN (EAN) | Packaging unit |
|-----------------|--------------|---------------|----------------|
| 2813.0 | TA 6/1/ST | 4044211055400 | 500 ST |

1577.6

RK 2,5-4/35 GR

Insulation plate




Insulation plate, Colour: Beige

General order data

| Product number: | Article name | GTIN (EAN) | Packaging unit |
|-----------------|--------------|---------------|----------------|
| 2003.2 | TRS 1 BG | 4044211048068 | 500 ST |

Partition plate



Partition plate, Width: 1.5 mm, Colour: Beige

General order data

| Product number: | Article name | GTIN (EAN) | Packaging unit |
|-----------------|--------------|---------------|----------------|
| 2002.2 | TW 2,5-10 BG | 4044211048044 | 500 ST |