



5100 Series Relampable Indicator Lights 0.688" (17.5 mm)



5100 Series are industry standard front panel indicators with choice of three types of terminals: solder lugs, screw or quick connect tabs

Description and Features

The Miniature Indicator Lights are versatile front panel indicators capable of accepting a variety of T-2 and T-3 1/4 miniature bayonet based incandescent lamps. These indicator lights accept a variety of different lens styles and colors, and are excellent for providing a large, bright, easily noticed status indicator. The lamp is not included with this indicator light; please order the required lamp separately.

Product Specifications

Mounting Type	Threaded Assembly
Mounting Hole Dimension	Diameter 0.688" (17.5mm)
Shape	Round
Terminals	Solder Lugs, Screw Type or Quick Connect
Electrical Ratings	125 Volts, 3 Watts
Material Housing	Glass filled polyester
Bezel Finish	Stainless Steel
Mounting	Front Panel Mounting
Type	Threaded
Panel Thickness	Maximum 0.406"
Hex Nut	Zinc plated steel
Mounting Centers	.969"
Lockwasher	Chromate treated steel
Material Lenses	High temperature lexan

Ordering Data

Lens Part No:	Description
25P-306*	Transparent Dome
25P-307**	Translucent Dome
25P-326*	Transparent Fluted Dome
25P-606*	Transparent Cylindrical
25P-607**	Translucent Cylindrical
25P-626*	Transparent Fluted Cylindrical



25P-326C




25P-607Y

*R = Red, A = Amber, G = Green, C = Clear

**R = Red, Y = Yellow, G = Green, W = White

Part No:	Description	Approval
5100-822	Solder Lug Terminals, No Resistor	UL Listed
5100-823	Screw Type Terminals, No Resistor	UL Listed
5100-824	.250 Q.C. Terminals, No Resistor	UL Recognized

Product Dimensions

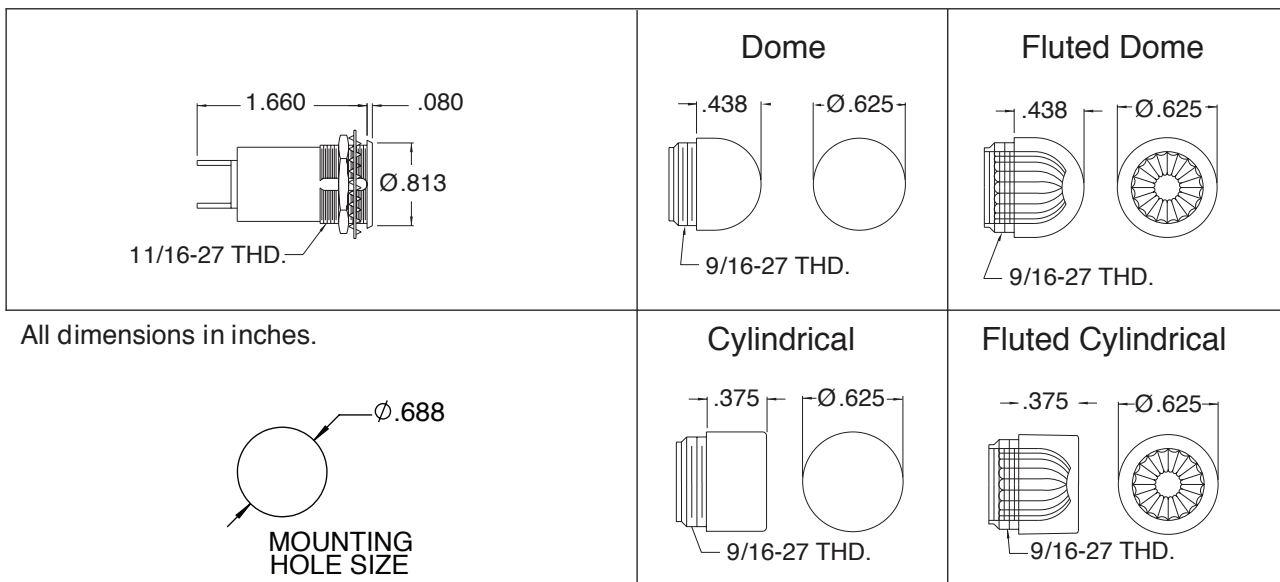

Compliances and Approvals

