


TOLERANCES  
 XX = ±.03  
 XXX = ±.010

M4 X .7 STUD (2X)  
 DIN 6798A LOCK WASHER (2X)  
 DIN 934 NUT HEX (4X)

DESIGNED FOR  
 MIL-C-39029/22-192  
 CONTACTS (5X)

UPPER NUT TORQUE  
 NOT TO EXCEED  
 11 IN-LBS WITH  
 LOWER NUT HELD IN  
 POSITION NOT TO  
 EXCEED 2.8 IN-LBS  
 OF TORQUE

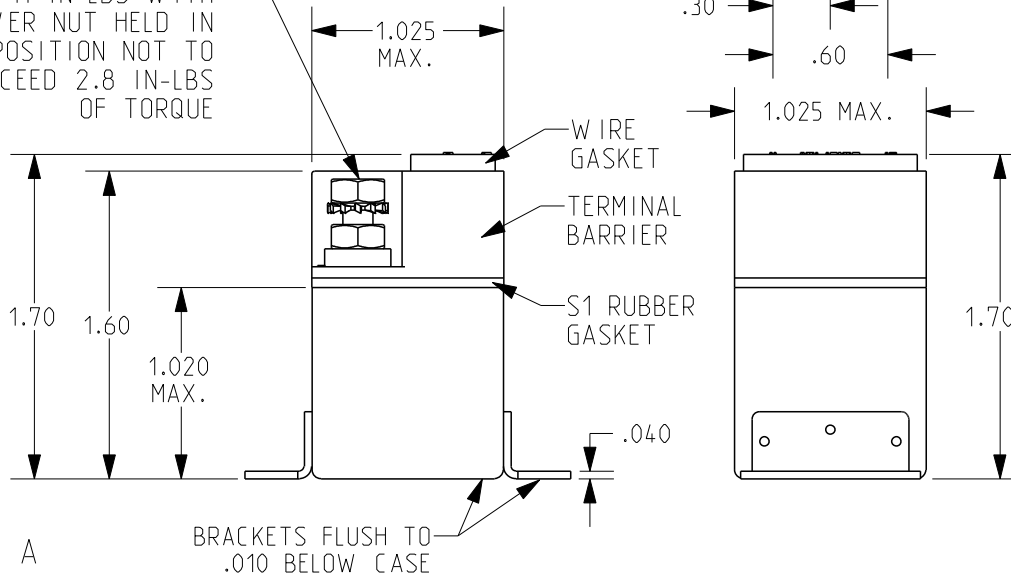

REV. A  
 DCO 301631


COIL: @ 25°C	
RESISTANCE	290 OHMS ± 10%
NOMINAL VOLTAGE	28.0 VDC
MUST OPERATE	13.5 VDC MAX.
MUST RELEASE	6.5 VDC MAX.; 2.3 VDC MIN.

ENVIRONMENT:	
VIBRATION	75 Hz TO 3000 Hz @ 20 g's
SHOCK	50 g's 11 MS. DURATION
TEMPERATURE	-70 °C TO +125 °C

NOTES: OPERATE AND RELEASE 15ms MAX. AT 25°C  
 CONTACT BOUNCE 1ms MAX.

DIELECTRIC 1250 Vrms MAX./60Hz (1000 Vrms/60 Hz COIL TO CASE). COIL TRANSIENT SUPPRESSION 42 Vdc MAX.

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: 50 AMPS 28 Vdc  
 RESISTIVE 50,000 OPERATIONS EACH

DR. R.F. 1/24/2014 CK. R.B. 1/24/2014



CUST. CII CATALOG	TE NUMBER
CUST. NO. - REV. -	2-1617802-4

FCA-150-KU4