


A768KE227M1DLAS029

A768, Polymer Aluminum, 220 uF, 20%, 20 VDC, -55/+125°C



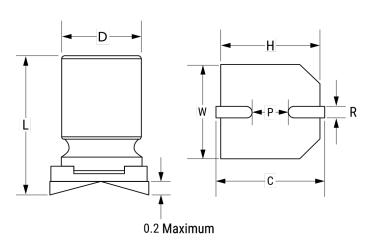

Click here for the 3D model.

Dimensions	
D	8mm +/-0.5mm
L	6.7mm +/-0.3mm
W	8.3mm +/-0.2mm
Н	8.3mm +/-0.2mm
С	9mm +/-0.2mm
Р	3.1mm NOM
R	0.8 - 1.1mm

Packaging Specifications		
Packaging	T&R, 380mm	
Packaging Quantity	1000	

General Information	
Series	A768
Dielectric	Polymer Aluminum
Style	SMD Can
Description	Surface Mount, Polymer Aluminum
RoHS	Yes
Lead	V-Chip
Qualifications	AEC-Q200
AEC-Q200	Yes
Halogen Free	Yes

220 uF
20%
20 VDC, 23 VDC (Surge)
-55/+125°C
125°C
2000 Hrs
29 mOhms (100kHz 20C)
1600 mAmps (100kHz 125C)
880 uA (2min 20°C)
Yes

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.