


NOTES (1-8)

- 1) HOUSING MATERIAL: GLASS REINFORCED BLACK NYLON
- 2) TOOL WEIGHT: 16.7 OZ (473G).
- 3) INSTALLS TYTON TIES T18-T80.
- 4) TOOL REQUIRES NO SPECIAL OPERATOR MAINTENANCE.
- 5) FOR REPLACEMENT BLADE ORDER PART # MK7-449
- 6) SAFETY GLASSES REQUIRED TO BE WORN AT ALL TIMES.
- 7) AIR PRESSURE: 90 PSI (6 BAR) MAX.
- 8) AIR CYLINDER MK7P-246 IS FACTORY LUBRICATED.

NOTES (9-12)

- 9) USE NON-LUBRICATED AIR ONLY.
- 10) MINATURE..... = T18 TIES (.09" WIDE)  
INTERMEDIATE = T30, T40 TIES (.14" WIDE)  
STANDARD..... = T50, T80 TIES (.18" WIDE)
- 11) TO LOCK THE FA KNOB, REMOVE THE SCREW FROM "UNLOCK" POSITION AND PLACE IN THE "LOCK" POSITION.
- 12) TO LOCK THE CAM KNOB, TIGHTEN THE SET SCREW UNTIL SNUG (DO NOT OVER TIGHTEN).

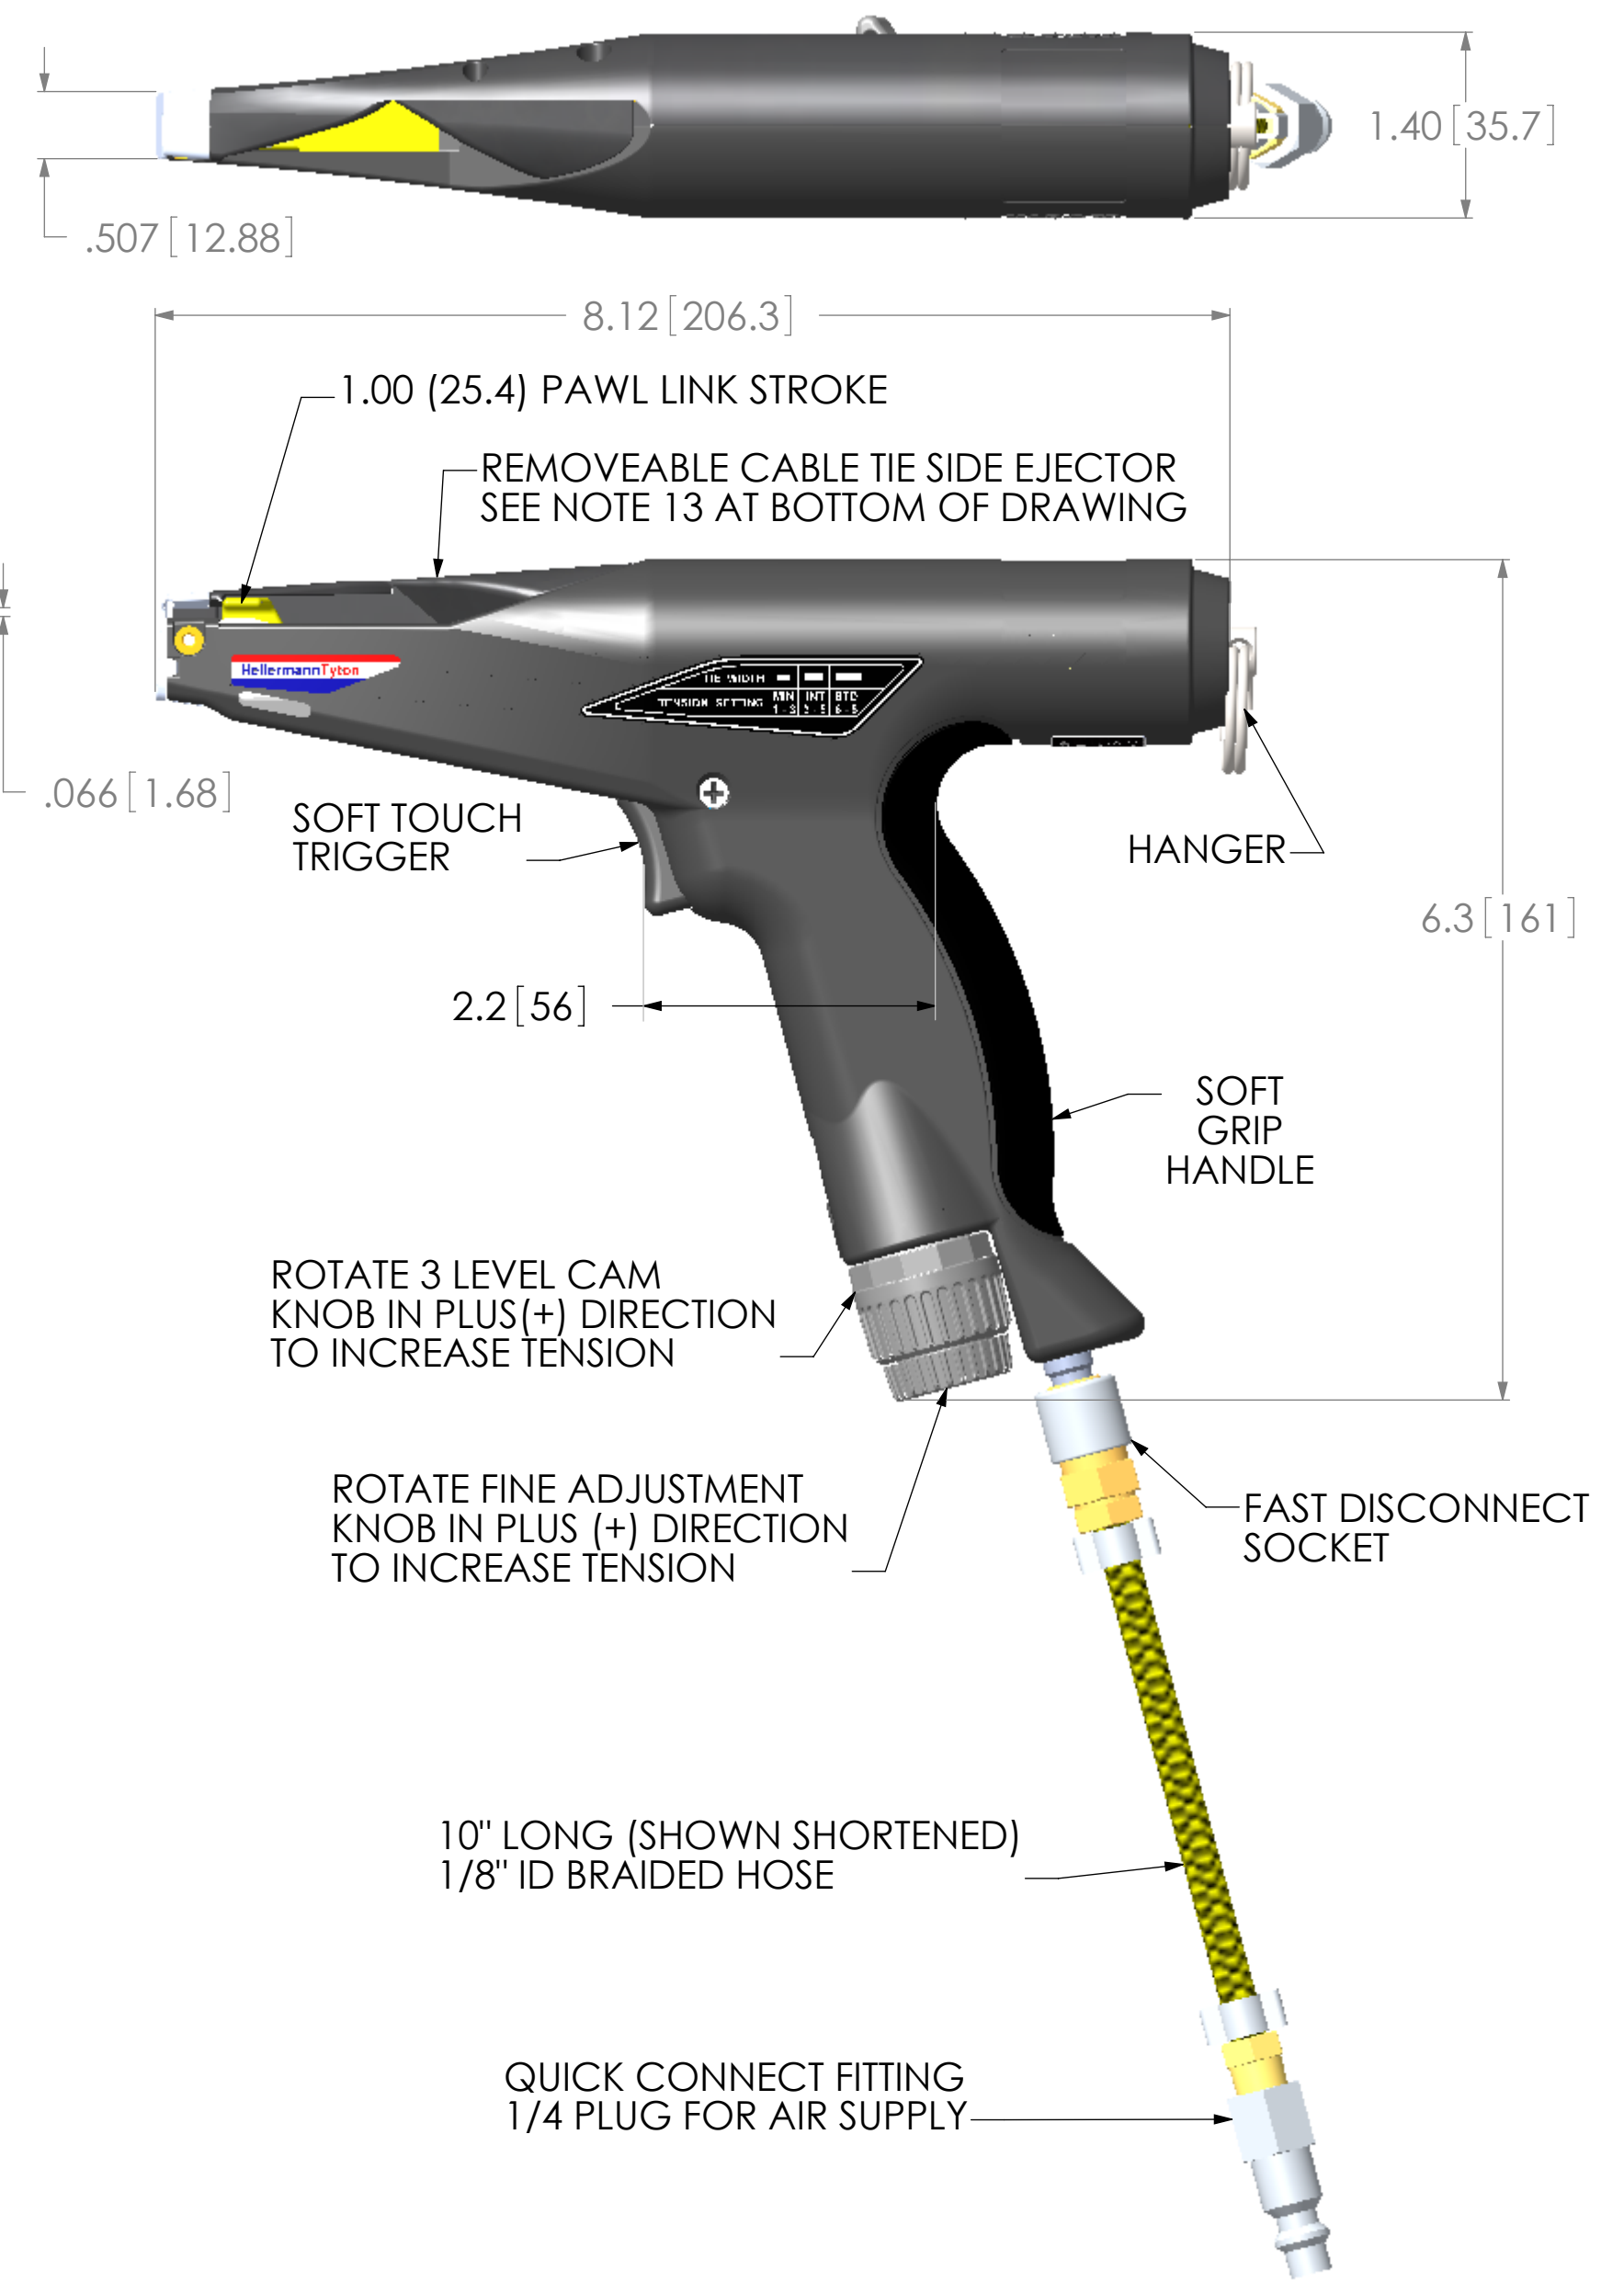

**HellermannTyton®**

ALL PROPRIETARY RIGHTS IN THE SUBJECT MATTER SHOWN ON THIS DRAWING ARE EXCLUSIVE PROPERTY OF HELLERMANN TYTON

name	date	city, state

NOTES

NOTES CONTINUED:  
13) RECOMMEND USING THE CABLE TIE SIDE EJECTOR TO EJECT OR DEFLECT THE CUTOFF PORTION OF THE TIE AWAY FROM THE FACE OF THE OPERATOR.

REVISION

level	03
by	WKL
date	2/19/2016
ECN #	300229
part level	-

TOLERANCES

.XXXX = ±.0005  
.XXX = ±.005  
.XX = ±.01  
.X = ±.03  
∠ = ±0.5°  
unless otherwise specified

units inches

PART

number	110-07101	phase	Production
name	CUSTOMER DRAWING MK7P		
material			

DRAWING

format	C	CAD	SW 2014	scale	3:4
computer file name	TS2087240CST_03		previous drawing number		
drawn	CMK	checked	WKL	approved	
date	05/06/1999	checked	03/28/2005	approved	
type	Customer	sheet		1 of 1	
number	TS2087240CST				