

Chip Monolithic Ceramic Capacitor

## Electrical Characteristics Data

### 0603 X7R 10nF 100V(0603B103K101CT)

1. Dimension



Size Inch (mm)	L (mm)	W (mm)	T (mm)
0603 (1608)	1.60±0.10	0.80±0.10	0.80±0.07


2. Cap, DF, IR @25°C

(Cap, DF @1KHz, 1Vrms ; IR @100V, 120sec)

Item	Spec
Cap [nF]	10 (±10%)
DF	≤ 2.5%
IR [G-ohm]	≥ 10

3. Impedance/ESR-Frequency

(Equipment: 4991B)

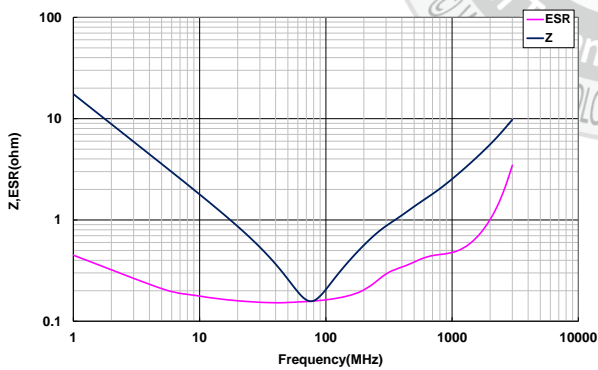


5. Capacitance – DC Voltage Characteristics

(Equipment: E4980A+B1505A+N1259A)


(DC charge 60±5sec)

50V : -42.43% ; 100V :-70.56%

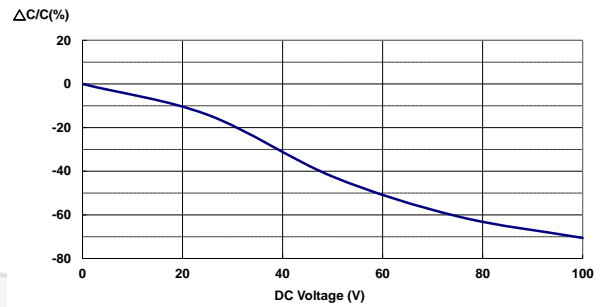


6. Capacitance – AC Voltage Characteristics

(Equipment: 4980A)

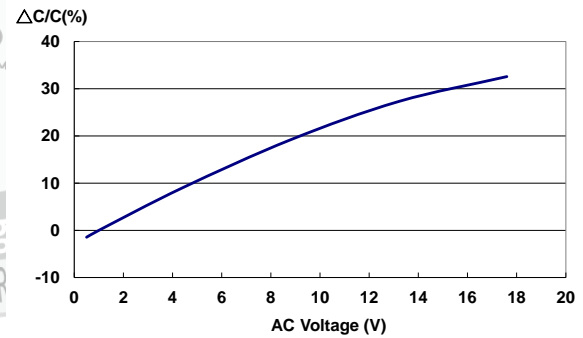

4. Capacitance – Temperature Characteristics

(Equipment: 4284A)

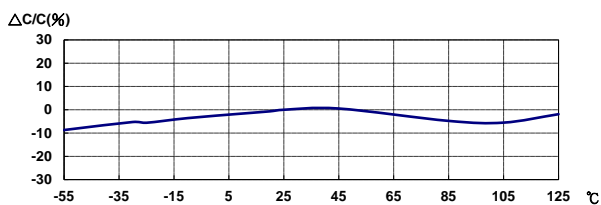

Last updated : 2022/07/11