


PIN WINDOW DETAIL
SCALE 10:1

GENERAL NOTES:

1. SEE SHEET 2 FOR ITEM NO'S, CHARTED DIMENSIONS, PACKAGING, MATERIAL SPEC'S AND P.C. BOARD LAYOUT.

OBSOLETE PART # UCP2005-0311	QUALITY SYMBOLS MAJOR CRITICAL	GENERAL TOLERANCES: (UNLESS SPECIFIED)		SCALE 4:1	DESIGN UNITS <input type="checkbox"/> mm <input checked="" type="checkbox"/> INCH	THIRD ANGLE PROJECTION <input type="checkbox"/> mm <input checked="" type="checkbox"/> INCH <input type="checkbox"/> mm ONLY	DIMENSIONS:		SHT	REV		
		mm	INCH				2	B				
EC NO. UCP2005-0311	DESCRIPTION REV	4 PLACES	±0.	±.	DRAWN BY & DATE <i>J. Long</i> 98/04/24	TITLE: SALES ASSEMBLY - SCSI VERTICAL STRADDLE MOUNT RECEPTACLE	Molex MOLEX INCORPORATED		REVISE ON CAD ONLY			
DRAWINGSMARKER 04/08/05		3 PLACES	±0.	±.005					CHECKED BY & DATE REGNIER 00/05/24	DRAWING NO. SD-73976-002		SHEET NO. 1 OF 2
CHK: BBARKER 04/08/05		2 PLACES	±0.13	±.					APPROVED BY & DATE REGNIER 00/05/24	MATERIAL NO.		
APPR: SWILLER 04/08/05		1 PLACE	±0.	±.					CAD FILENAME	DRAWING NO. SD-73976-002		SIZE C
B		ANGULAR: ± 1/2°		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.						

MATERIAL NO.	CIRCUIT SIZE	PLATING	DIM. A		DIM. B		DIM. C		DIM. D		DIM. E	
			INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM
73976-0002	68	574	2.095	53.21	1.650	41.91	1.816	46.13	1.960	49.78	1.968	49.99
73976-0022	68	574	2.095	53.21	1.650	41.91	1.816	46.13	1.960	49.78	1.968	49.99

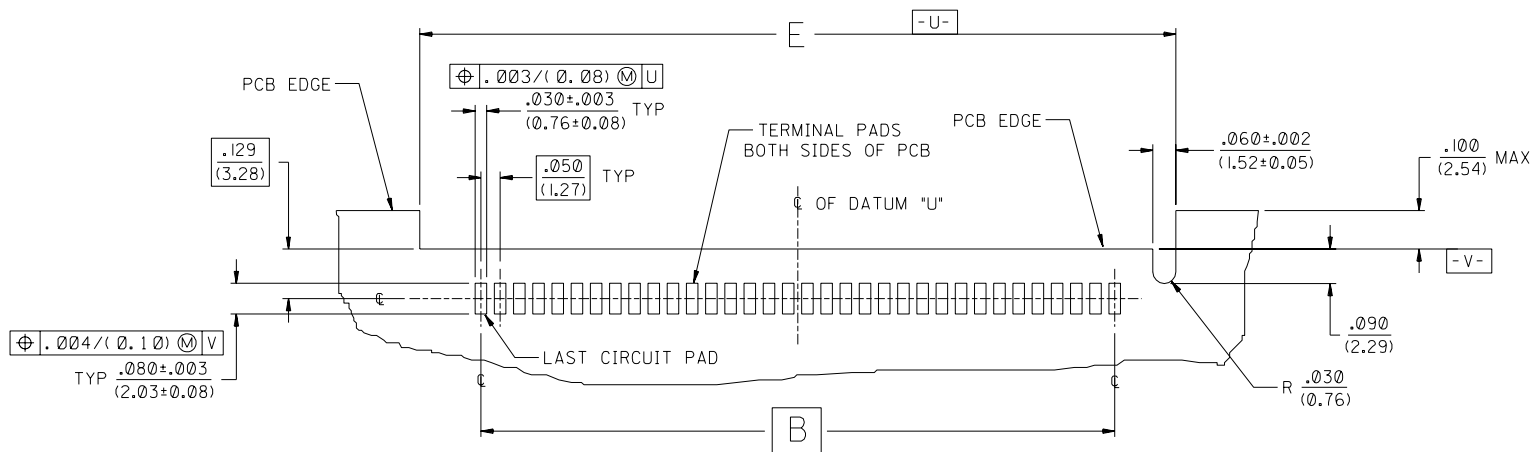

RECOMMENDED PC BOARD LAYOUT

RECOMMENDED PC BOARD THICKNESS: (1.57) / .062

NOTES:

- MATERIAL:**
RECEPTACLE HSG: GLASS FILLED LIQUID CRYSTAL POLYMER;
COLOR: BLACK; UL 94V-0
TERMINALS: PHOSPHOR BRONZE
- FINISH:**
TERMINALS: SEE LIST BELOW
- REFER TO PS-79058 PRODUCT SPEC. FOR ELECTRICAL, MECHANICAL AND ENVIRONMENTAL SPECIFICATIONS.
- PACKAGING:**
PARTS PACKAGED IN TUBES PER PK- 70873-0427.

TERMINAL FINISH:

SELECTIVE GOLD (Au) IN CONTACT AREA:
THICKNESS = 30 MICROINCH MINIMUM.
SELECTIVE TIN ALLOY IN THE PC TAIL AREA:
THICKNESS = 75 MICROINCH MINIMUM.
BOTH OVER NICKEL (Ni) UNDERPLATE.

NOTE FOR LEAD FREE CONVERSION:

THE PRIMARY SHIPPING CARTON WILL BE LABELED "COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2002/53/EC". CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH LEAD.

SEE SHEET 1 EC NO. UCP2005-0311 DRAWN BY: SMART 04/08/05 CHK: BBARKER 04/08/05 APPR: SWILLER 04/08/05	QUALITY SYMBOLS MAJOR $\blacktriangledown = 0$ CRITICAL $\nabla = 0$	GENERAL TOLERANCES: (UNLESS SPECIFIED)		SCALE 4:1	DESIGN UNITS <input type="checkbox"/> mm <input checked="" type="checkbox"/> INCH	DIMENSIONS: <input type="checkbox"/> mm <input checked="" type="checkbox"/> INCH <input type="checkbox"/> mm ONLY	SHT	REV
		4 PLACES $\pm 0.$	$\pm .$	DRAWN BY & DATE <i>J. Long</i> 98/04/24	CHECKED BY & DATE REGNIER 00/05/25	TITLE: SALES ASSEMBLY - SCSI VERTICAL STRADDLE MOUNT RECEPTACLE	REVISE ON CAD ONLY	
REV B	DESCRIPTION	2 PLACES ± 0.13	$\pm .$	APPROVED BY & DATE REGNIER 00/05/	CAD FILENAME	MATERIAL NO. SEE CHART	DRAWING NO. SD-73976-002	SHEET NO. 2
		1 PLACE $\pm 0.$	$\pm .$	ANGULAR: $\pm 1/2^\circ$	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.		SIZE C	