



RE∨ISI⊡NS						
RE∨	ECO	DESCRIPTION	DATE	ΒY	APPR	
01	-	RELEASE NEW DWG FORMAT	-	-	-	
02	-	ADDED IP69K RATING	4/21/2020	RO	DR	
03	-	CHANGED VOLTAGE FROM 250V TO 500V	21JAN22	MRF	DR	

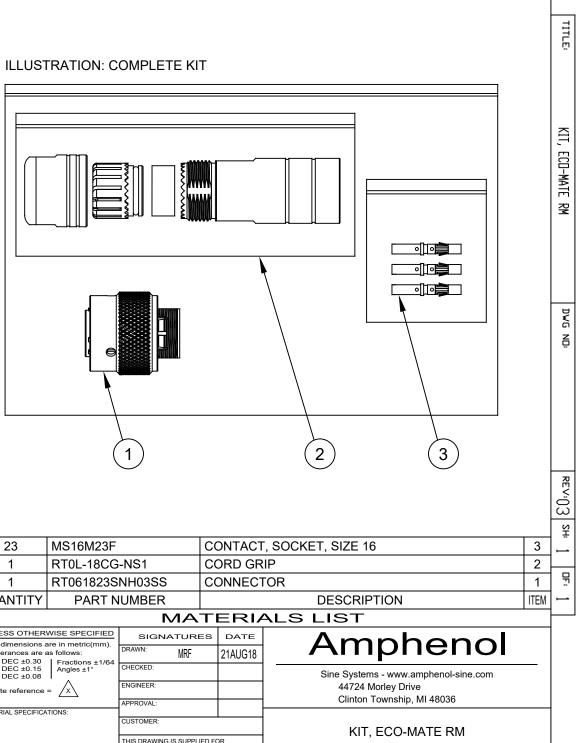

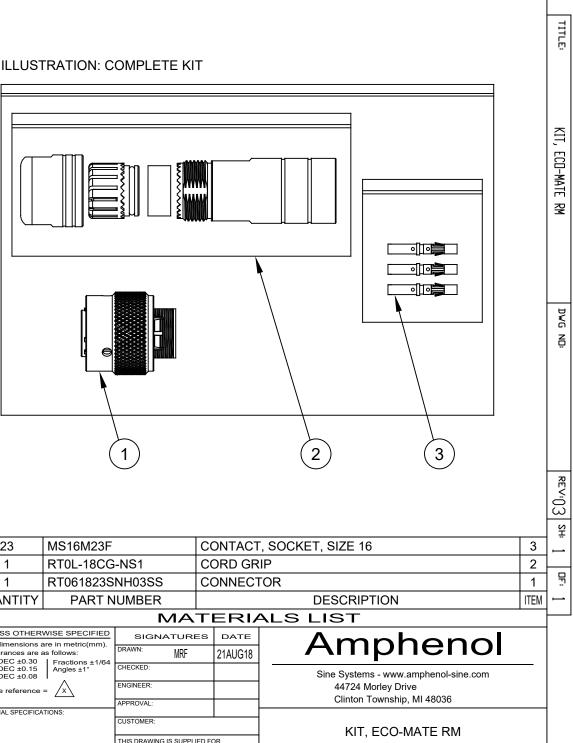


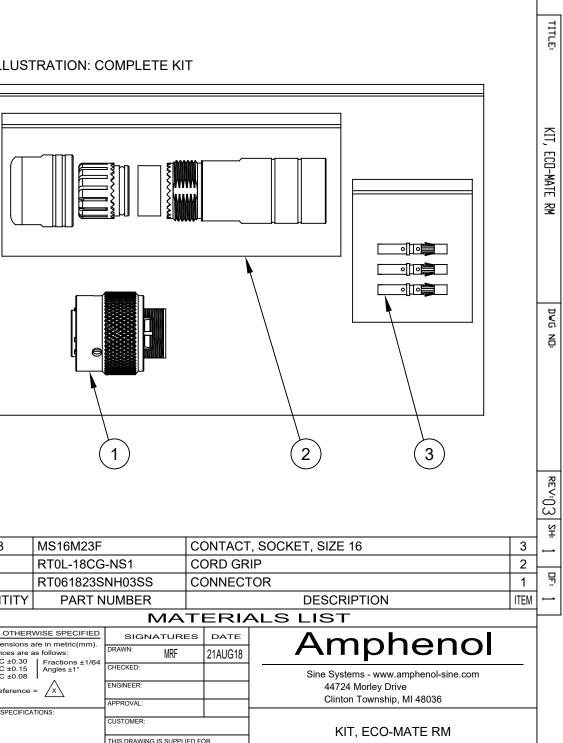

23	MS16M23F			
1	RT0L-18CG-NS1			
1	RT061823S	NH03SS		
QUANTITY	PART N	NUMBER		
		I∕		
UNLESS OTHER 1) All dimensions a	SIGNA			
2) Tolerances are a 1 PL DEC +0.30	DRAWN:			
2 PL DEC ±0.15 3 PL DEC ±0.08	CHECKED:			
3) Note reference	ENGINEER:			
MATERIAL SPECIFICA	APPROVAL:			
	CUSTOMER:			
PROCESS SPECIFICA	THIS DRAWING IS INFORMATION ON SPECIFICATIONS SHOWN HEREON THE AMPHENOL C OF REPRODUCTIC DIMENSIONS ARE MANUFACTURING			

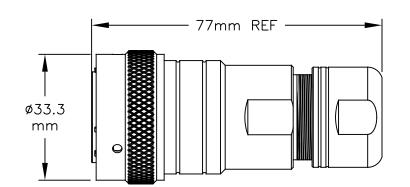



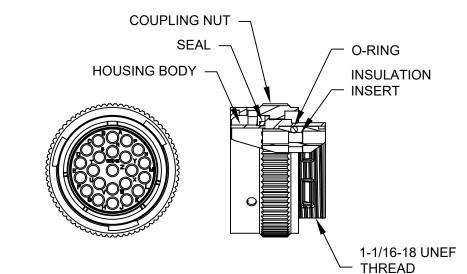

NOTES:

- 1) CORD GRIP RANGE: 10mm TO 14mm
- 2) CONTACT BARREL RANGE: 16AWG TO 18AWG
- 3) RECOMMENDED CRIMP TOOLS: HAND CRIMPER: MFX-3959 PNEUMATIC CRIMPER: MFX-3960
- 4) EXTRACTION TOOL: QXRT16

5) MATERIALS:

HOUSING BODY: ZINC DIE CAST, NICKEL PLATED WAVE SPRING: STAINLESS STEEL INSULATION INSERT: PA66, UL94/V-0 CONTACT: BRASS, GOLD FLASH PLATED SEAL AND O-RING: SILICONE

6) ELECTRICAL DATA:

a) CURRENT (MAX): 13A

- b) VOLTAGE (MAX): 500V AC/DC
- c) INSULATION RESISTANCE (MIN): 5000M OHMS
- d) TEST VOLTAGE (BETWEEN CONTACTS): 3050V

7) TECHNICAL DATA:

- a) TEMPERATURE RANGE: -40°C TO 105°C
- b) PROTECTION: IP67 (IP69K WHEN IN MATED CONDITION)
- c) MATING CYCLES: >500
- d) VIBRATION RESISTANCE PER MIL-STD-202 METHOD 204
- e) THERMAL SHOCK PER MIL-STD-202 METHOD 207
- f) 48 HOUR SALT SPRAY PER MIL-STD-202 METHOD 101

8) RoHS COMPLIANT

IS SUPPLIED FOR ONLY. DESIGN FEATURES, IS AND PERFORMANCE DATA IS AND PERFORMANCE DATA IS ARE THE PROPERTY OF L CORPORATION. NO RIGHTS ICON PAREIMPLIED. ALL RE SUBJECT TO NORMAL NG VARIATIONS.

C-

В

RT061823SNH03SS-K 03

SHEET 1 OF 1