



S21 TRANS LOG MAG.
▶0.000 dB 0.100 dB/DIV

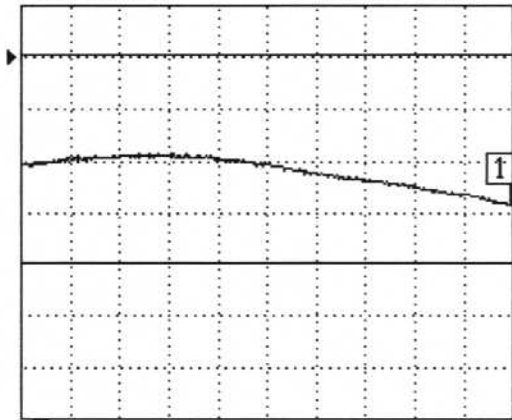


1.600000000 GHz 1.800000000

S11 REFL LOG MAG.
▶0.000 dB 10.000 dB/DIV

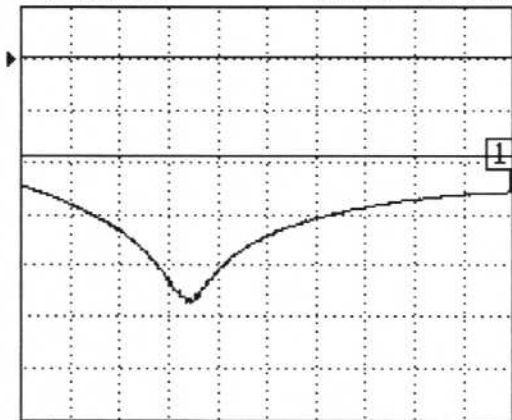


1.600000000 GHz 1.800000000

S22 REFL LOG MAG.
▶0.000 dB 10.000 dB/DIV

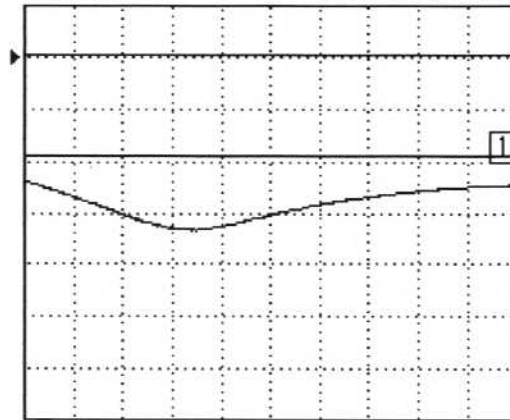

1.600000000 GHz 1.800000000

S12 TRANS LOG MAG.
▶0.000 dB 10.000 dB/DIV

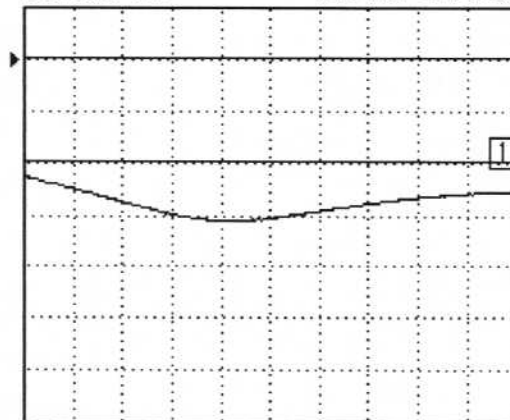

1.600000000 GHz 1.800000000

CH 1 - S21
0.0000 mm REF
0.000 dB OFFSET
0.00° OFFSET

MARKER 1
1.800000000 GHz
-0.288 dB

MARKER TO MAX
▶MARKER TO MIN

MARKER READOUT
FUNCTIONS

D3I0118 Isolator

1.60 - 1.80 GHz

Isolation: 20 dB Min

Insertion Loss: 0.40 dB Max

VSWR: 1.25:1 Max

SMA-F All Ports