

HORTICULTURE LEDs

- Broad portfolio of mid-power & high-power LEDs for all applications
- Reported DLC Horticulture lifetimes up to Q90 >109k hrs
- Photophyll™ Select LEDs: new phosphor-converted LED color with blue and green spectral output tuned for horticulture applications



April 2023 (FS39R4)

PORTFOLIO OVERVIEW

LED Platform	J Series® 5050		XLamp® XP		J Series 2835 3V
Footprint (mm)	5.0 x 5.0		3.45 x 3.45		2.8 x 3.5
Max Power (W)	6		4-6		1
Photophyll™ Select			XP-G3		
White	JR5050C E Class	JR5050B K Class	XP-G3 S Line		
450 nm			XP-G3		
660 nm			XP-G3 S Line	XP-E2	
730 nm				XP-E2	
PC Purple					

PHOTOPHYLL™ SELECT LEDs

- Advanced horticulture spectrum optimized for maximum performance with 660 nm Photo Red LEDs
- First LEDs with precise control over the green/blue ratio

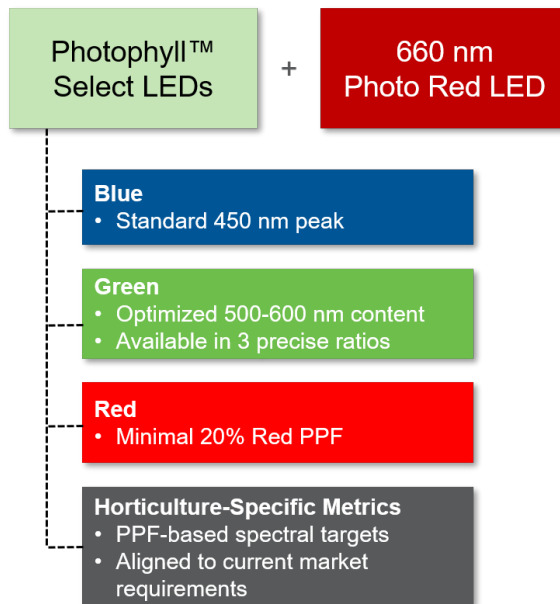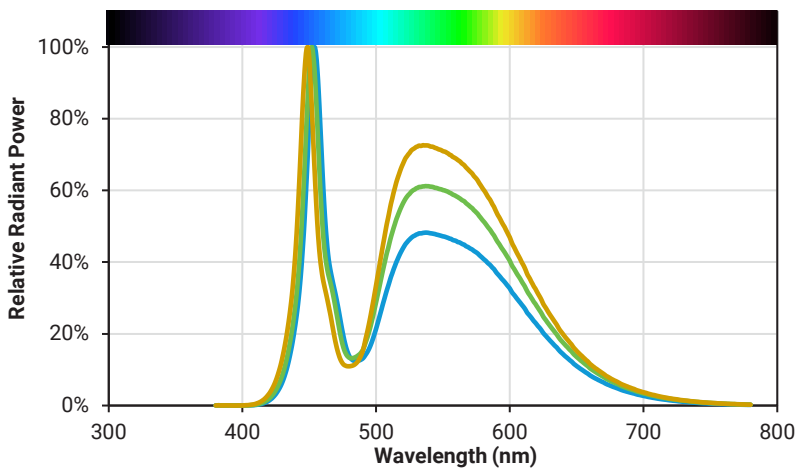

PHOTOPHYLL™ SELECT LEDs

Color	Red PPF %	Green/Blue Ratio	LED	Test Current (mA)	Min PPF (μmol/s)	Typ PPF (μmol/s)	PPF/W (μmol/J)	Order Code
Photophyll Select	20%	2.0	XLamp® XP-G3	350	2.50	2.60	2.62	XPGDWT-N1-0000-00XPP
			JB2835B 3V G Class	55	0.41	0.44	3.00	JB2835BWT-G-N001A0000-N0000001
		2.5	XLamp XP-G3	350	2.50	2.60	2.62	XPGDWT-Q1-0000-00XPP
			JB2835B 3V G Class	55	0.41	0.44	3.00	JB2835BWT-G-Q001A0000-N0000001
		3.0	XLamp XP-G3	350	2.50	2.60	2.62	XPGDWT-X1-0000-00XPP
			JB2835B 3V G Class	55	0.41	0.44	3.00	JB2835BWT-G-X001A0000-N0000001

WHITE LEDs

More CCT & CRI options are available for the white LEDs.
Please see the product data sheets for more detail.

Color	Red PPF %	Green/Blue Ratio	LED	Test Current (mA)	Min PPF (μmol/s)	Typ PPF (μmol/s)	PPF/W (μmol/J)	Order Code
5000K 70 CRI	~27%	~2.3	JR5050C 6V E Class	400	5.28	6.34	2.81	JR5050CWT-E-B50EB0000-N0000001
			JR5050B 6V K Class	400	5.28	6.01	2.65	JR5050BWT-K-B50EB0000-N0000001
			JR5050B 30V K Class	80	5.28	6.01	2.65	JR5050BWT-K-B50EK0000-N0000001
			XLamp XP-G3 S Line	350	2.71	---	2.77	XPGDWT-BS-0000-00P3E
			JB2835B 3V G Class	55	0.41	0.45	3.04	JB2835BWT-G-B50EAHGRO-N00A0001
4000K 70 CRI	~34%	~3.0	JR5050C 6V E Class	400	5.16	6.19	2.75	JR5050CWT-E-B40EB0000-N0000001
			JR5050B 6V K Class	400	5.16	5.87	2.59	JR5050BWT-K-B40EB0000-N0000001
			JR5050B 30V K Class	80	5.16	5.87	2.59	JR5050BWT-K-B40EK0000-N0000001
			XLamp XP-G3 S Line	350	2.64	---	2.71	XPGDWT-BS-0000-00P5E
			JB2835B 3V G Class	55	0.40	0.44	2.97	JB2835BWT-G-B40EAHGRO-N00A0001

COLOR LEDs

730 nm LED flux values shown are photon flux (PF) for the range 380-780 nm.

Color	Red PPF %	Green/Blue Ratio	LED	Test Current (mA)	Min PPF (μmol/s)	Typ PPF (μmol/s)	PPF/W (μmol/J)	Order Code
450 nm (Royal Blue)	---	---	XLamp XP-G3	350	2.77	---	2.83	XPGDRY-L1-0000-00601
			JB2835 3V N Class	140	---	1.01	2.43	JE2835ARY-N-0002A0000-N0000001
660 nm (Photo Red)	~99%	---	XLamp XP-G3 S Line	350	2.99	---	4.40	XPGDPR-LS-0000-00H01
			XLamp XP-E2	350	2.72	---	3.71	XPEBPR-L1-0000-00F01
			JB2835 3V N Class	140	---	0.72	2.33	JE2835AHR-N-0001A0000-N0000001
730 nm (Far Red)	---	---	XLamp XP-E2	350	2.49*	---	3.78*	XPEBFR-L1-0000-00C01
			XLamp XP-E2	350	2.34*	---	3.62*	XPEBFR-L1-0000-00B01
			JB2835 3V N Class	140	---	0.72*	2.40*	JE2835AFR-N-0001A0000-N0000001
PC Purple	71%	0.63	JB2835 3V N Class	140	---	0.89	2.20	JE2835APP-N-0001A0000-N0000001

* All performance figures shown for T_j = 25°C