



S21 TRANS LOG MAG.
▶ 0.000 dB 0.100 dB/DIV

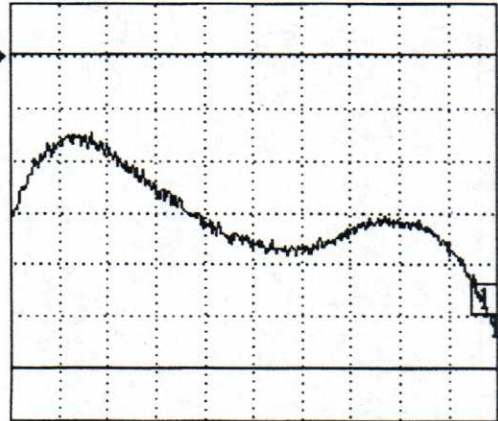

0.698000 GHz 1.000000

S22 REFL LOG MAG.
▶ 0.000 dB 5.000 dB/DIV

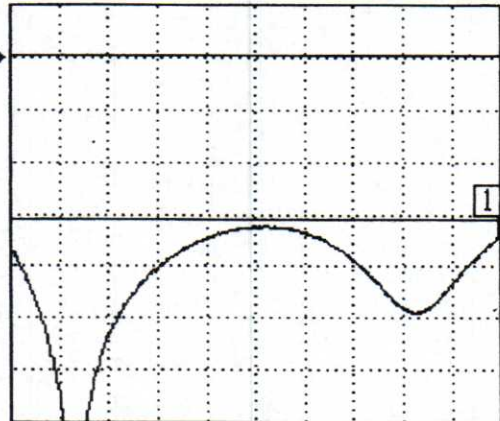


0.698000 GHz 1.000000

CH 1 - S21
REFERENCE PLANE
0.0000 mm

MARKER 1
1.000000 GHz
-0.540 dB


MARKER TO MAX
▶ MARKER TO MIN

S11 REFL LOG MAG.
▶ 0.000 dB 5.000 dB/DIV

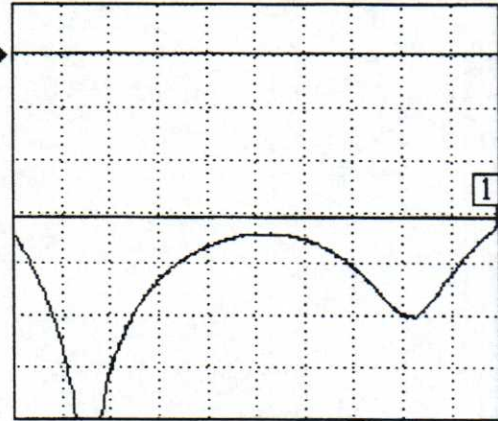

0.698000 GHz 1.000000

S12 TRANS LOG MAG.
▶ 0.000 dB 5.000 dB/DIV

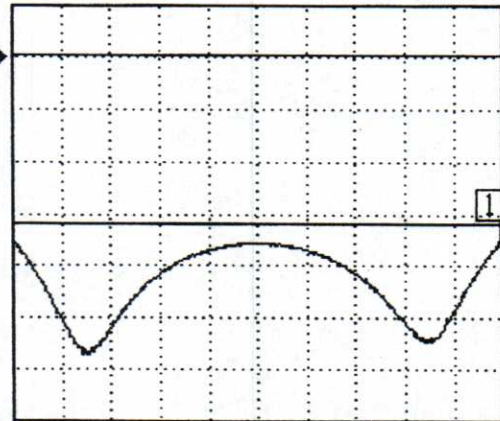

0.698000 GHz 1.000000

MARKER READOUT
FUNCTIONS

D3C6710S circulator

698-100 MHz

Isolation: 16 dB Min

Insertion loss: 0.60 dB Max

VSWR: 1.40:1 Max

SMA-F All 3 Ports