

## SUMMARY

### # Wires

Low voltage 2



*Image is for illustrative purpose only*

Series OT  
Termination type Male solder  
IP rating 68 when mated  
AWG wire size 30.00 - 26.00  
Cable Ø 3.10 - 3.50 mm  
Status active

### Download

[Request a quote](#)

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model FG\*: Straight plug, cable collet  
Keying 1 key (alpha=0, plug: male contacts, receptacle: female contacts)  
Housing Material Brass (chrome plated [SAE AMS 2460]) shell and collet nut, nickel plated [SAE AMS QQ N 290] brass latch sleeve and mid pieces  
Weight 6.78 g

### Performance

Configuration OT.511 : SPE - 2 High Speed, Low Voltage (1000BASE-T1 (IEEE 802.3bp))  
Insulator L: PEEK (UL 94 / V-0/1.5)  
Rated Current


### Others

Endurance (Shell): >3000 mating cycles  
Temp (min / max): -55°C / +200°C  
Humidity (max): <=95% [at 60 deg C / 140 F]  
Resistance to vibration: 15 g [10 Hz - 2000 Hz]

*LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.*

Shock Resistance: 100 g [ 6 ms]  
Climatical Category: 50/175/21  
Shielding efficiency (min): 75 dB (at 10 MHz)  
Shielding efficiency (min): 40 dB (at 1 GHz)  
Salt Spray Corrosion: >1000 hr

## DRAWINGS

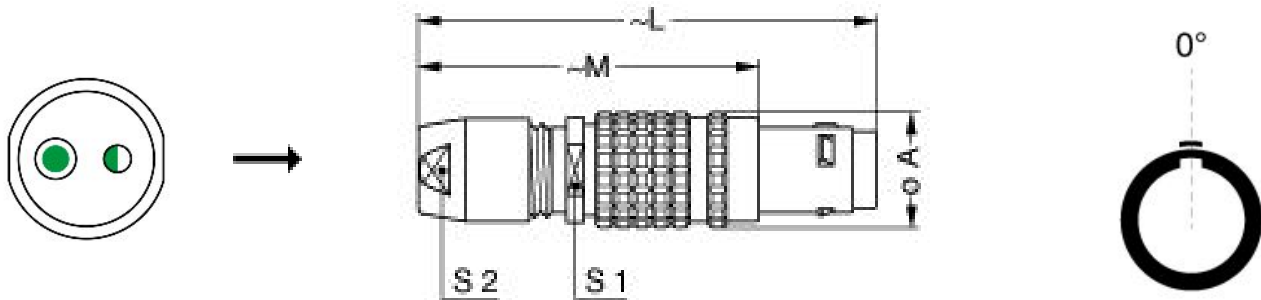

### Dimensions

	A	L	M	S1	S2
mm.	9.5	39	29	7.5	7
in.	0,37	1,54	1,14	0,30	0,28

## RECOMMENDED BY LEMO

### Tools

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.