


REV. 0
DCO 170597

COIL: @ 25°C	RESISTANCE	125 OHMS ±10%
	NOMINAL VOLTAGE	12.0 VDC
	MUST OPERATE	6.2 VDC
	MUST RELEASE	3.9 VDC MAX, 1.3 VDC MIN

ENVIRONMENT:		
VIBRATION	10 CPS TO	2000 CPS @ 30 g's
SHOCK	90 g's	11 ± 1 MS. DURATION
TEMPERATURE	-65 °C TO	+125 °C

NOTES:	OPERATE TIME 5 MS MAX.
	RELEASE TIME 4 MS MAX.
	CONTACT BOUNCE 2.5 MS MAX.

CUSTOMER DATA SHEET

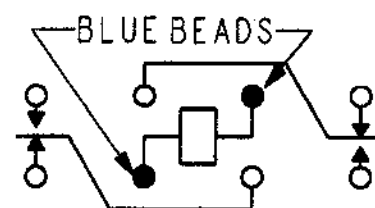

TERMINAL VIEW

CONTACT RATING:	LOW LEVEL TO 2A
	28 VDC RESISTIVE 100,000 OPERATIONS

DR. ASB 11/14/01 CK. TG 11-4-01

CII Technologies
advanced control electronic solutions

CUST. CII STD	"3SBK" RELAY
CUST. NO. _____ REV. _____	

3SBK5072D2