



### ■ Features :

- Charger for lead-acid batteries (flooded, Gel and AGM) and Li-ion batteries (lithium iron and lithium manganese) (Note.1)
- 2 stage charging characteristic
- Universal AC input / Full range
- Built-in active PFC function, PF>0.95
- 3 pole AC inlet IEC320-C14
- Class I power ( with earth pin)
- Protections: Short circuit / Over voltage / Over temperature
- Fanless design, cooling by free air convection
- Fully enclosed plastic case
- No load power consumption<1W
- 2 color LED indicator for charging status
- Approvals : UL / CUL / TUV / EAC / CB / FCC / CE / UKCA
- 2 years warranty



### ■ GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>




### SPECIFICATION

BS EN/EN62368-1 UL62368-1 TPTC004 IEC62368-1

ORDER NO.	GC330A36-C4P	GC330A48-C4P
OUTPUT	SAFETY MODEL NO.	GC330A36
	DC VOLTAGE (Typ.)	40.8V
	RECOMMENDED BATTERY CAPACITY <small>Note.3</small>	20 ~ 65Ah
	PEAK CURRENT(Typ.) <small>Note 5</small>	8A
	CONTINUOUS OUTPUT CURRENT (Typ.) <small>Note 6</small>	6.4A
	OUTPUT POWER RANGE	261.1 ~ 326.4W
	LED INDICATOR	Charging(CC) : RED Floating charging(CV) : GREEN
INPUT	VOLTAGE RANGE <small>Note.4</small>	90 ~ 264VAC 127 ~ 370VDC
	FREQUENCY RANGE	47 ~ 63Hz
	POWER FACTOR (Typ.)	PF>0.95 / 230VAC PF>0.98 / 115VAC at full load
	EFFICIENCY (Typ.)	93.5%
	AC CURRENT (Typ.)	4A / 115VAC 2A / 230VAC
	INRUSH CURRENT (max.)	120A / 230VAC
	LEAKAGE CURRENT(max.)	1.5mA / 240VAC
PROTECTION	SHORT CIRCUIT	Protection type : Hiccup mode, recovers automatically after fault condition is removed
	OVER VOLTAGE	105 ~ 135% rated output voltage Protection type : Shut down o/p voltage, re-power on to recover
	OVER TEMPERATURE	100°C ± 10°C (RTH2) Protection type : Shut down o/p voltage, re-power on to recover
ENVIRONMENT	WORKING TEMP.	-30 ~ +60°C (Refer to "Derating Curve")
	WORKING HUMIDITY	20% ~ 90% RH non-condensing
	STORAGE TEMP., HUMIDITY	-40 ~ +85°C, 10 ~ 95% RH
	TEMP. COEFFICIENT	±0.03% / °C (0~40°C)
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes
SAFETY & EMC <small>(Note. 7)</small>	SAFETY STANDARDS	UL62368-1, TUV BS EN/EN62368-1, EAC TP TC 004 approved
	WITHSTAND VOLTAGE	I/P-O/P: 3KVAC
	ISOLATION RESISTANCE	I/P-O/P: 100M Ohms / 500VDC / 25°C / 70% RH
	EMC EMISSION	Compliance to BS EN/EN55032 class B, BS EN/EN61000-3-2,3, FCC PART 15 / CISPR22 class B, CAN ICES-3(B)-NMB-(B), EAC TP TC 020
OTHERS	EMC IMMUNITY	Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11, light industry level, EAC TP TC 020
	MTBF	1624.8K hrs min. Telcordia SR-332 (Bellcore) ; 209.5K hrs min. MIL-HDBK-217F (25°C)
	DIMENSION	220*95*46mm (L*W*H)
CONNECTOR	PACKING	1.25Kg; 12pcs/16Kg/1.09CUFT
	PLUG	See page 2
NOTE	CABLE	See page 2
	<p>1. Modification for charger specification may be required for different battery specification. Please contact battery vendor and MEAN WELL for details.</p> <p>2. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.</p> <p>3. This is MeanWell's suggested range, please consult your battery manufacturer for their suggestions about maximum charging current limitation.</p> <p>4. Derating may be needed under low input voltage. Please check the derating curve for more details.</p> <p>5. Test condition is at 25°C the charging current vary with the ambient and components temperature. The lower temperature, the higher charging current.</p> <p>6. Maximum charging current will be in the range of 85~110% rated output current.</p> <p>7. The power supply is considered as an independent unit, but the final equipment still need to re-confirm that whole system complies with the EMC directives.</p> <p>8. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).</p> <p>※ Product Liability Disclaimer : For detailed information, please refer to <a href="https://www.meanwell.com/serviceDisclaimer.aspx">https://www.meanwell.com/serviceDisclaimer.aspx</a></p>	

■ Mechanical Specification

Case No. GS280A Unit:mm

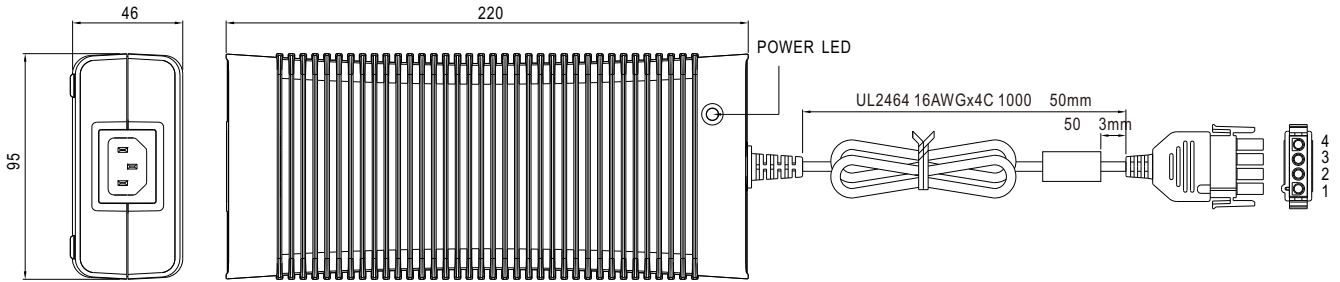

■ Plug Assignment


Standard male plug(power supply side): AMP 1-480702-0 equivalent

C4P		
	PIN NO.	OUTPUT
4	1,2	+V
3	3,4	-V
2		
1		

-V connected to AC FG

Female plug(customer side, not provide with the power supply):  
AMP 1-480703-0 equivalent


■ Charging Curve

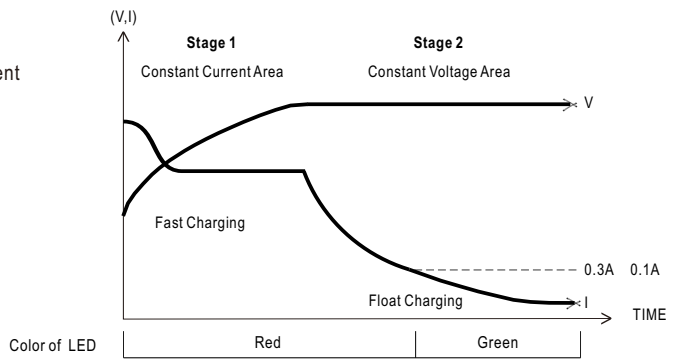

Model	Suggested Battery capacity
GC330A36	20-65Ah
GC330A48	20-65Ah

Suitable for lead-acid batteries (flooded,Gel and AGM) and Li-ion batteries (lithium iron and lithium manganese)

■ Derating Curve

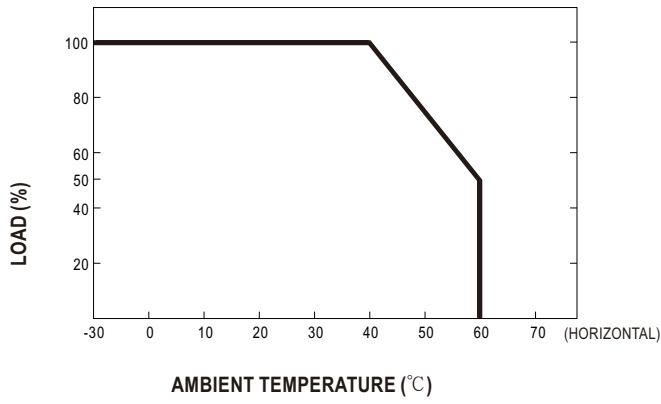

■ Static Characteristics

