


T350A224K050AS

T350, Tantalum, MnO₂ Tantalum, Commercial Grade, .22 uF, 10%, 50 VDC, Radial, Solid Tantalum, Conformal, Dipped, Lead Spacing = 2.54mm

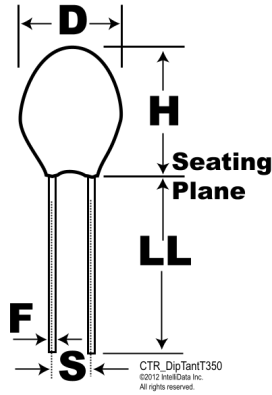

Click [here](#) for the 3D model.

Dimensions	
D	4.5mm
H	7.1mm
S	2.54mm +/-0.38mm
LL	12.7mm +/-1.26mm
F	0.5mm +/-0.05mm

Packaging Specifications	
Packaging	Bulk, Bag
Packaging Quantity	1000

General Information	
Series	T350
Dielectric	MnO ₂ Tantalum
Style	Radial
Description	Radial, Solid Tantalum, Conformal, Dipped
Features	Low Leakage
RoHS	No
Prop 65	⚠ WARNING: Cancer and reproductive harm - http://www.p65warnings.ca.gov
SCIP Number	0c1392c3-c7b9-4178-827c-fa26617a3178
Termination	Lead (SnPb)
AEC-Q200	No
Notes	Longest Lead Is Positive.

Specifications	
Capacitance	.22 uF
Capacitance Tolerance	10%
Voltage DC	50 VDC (85C), 33 VDC (125C), 0.5 VDC (125C Reverse)
Temperature Range	-55/+125°C
Dissipation Factor	3%
Leakage Current	0.5 uA