

**ACT20P**  
**ACT20P-CI1-CO-OLP-S**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

**Similar to illustration****ACT20P: The flexible solution**

- Precise and highly functional signal converters
- Release levers simplify handling

**General ordering data**

Type	ACT20P-CI1-CO-OLP-S
Order No.	<a href="#">7760054118</a>
Version	Signal converter/isolator, Output current loop powered, Input : 0-20 mA, Output : 4-20 mA, (loop powered)
GTIN (EAN)	6944 169656583
Qty.	1 pc(s).

Creation date September 15, 2020 9:54:43 PM CEST

Catalogue status 11.09.2020 / We reserve the right to make technical changes.

**ACT20P**  
**ACT20P-CI1-CO-OLP-S**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data****Dimensions and weights**

Width	12.5 mm	Width (inches)	0.492 inch
Height	117.2 mm	Height (inches)	4.614 inch
Depth	114 mm	Depth (inches)	4.488 inch
Weight	126 g	Net weight	100 g

**Temperatures**

Humidity	5...95 %, no condensation	Operating temperature, max.	60 °C
Operating temperature, min.	-20 °C	Storage temperature, min.	-40 °C
Operating temperature	-20 °C...60 °C	Ambient temperature	-20 °C...+60 °C
Storage temperature	-40 °C...		

**Environmental Product Compliance**

REACH SVHC Lead 7439-92-1

**Input**

Number of inputs	1	Sensor	Current source
Input current	0...20 mA	Voltage drop, current input	< 3 V

**Output**

Number of outputs	1	Output current	4...20 mA, loop-powered
Load impedance current	≤ 600 Ω		

**General data**

Accuracy	< 0.1 % of end value	Configuration	none
Galvanic isolation	2-way isolator	Rail	TS 35
Step response time	≤ 1 ms	Temperature coefficient	≤ 100 ppm/K
Voltage supply	via output current loop, min. 12 V DC/ max. 30 V DC		

**Insulation coordination**

EMC standards	EN 61010-1:2011, UL 61010-1, IEC61000-6-2, IEC 61000-6-4	Galvanic isolation	2-way isolator
Impulse withstand voltage	4 kV (1.2/50 μs)	Insulation voltage	2 kV inputs / outputs
Pollution severity	2	Rated voltage	300 V
Surge voltage category	III		

**Data for Ex applications (ATEX)**

Marking II 3 G Ex ec IIC T6 Gc

**Connection data**

Type of connection	Screw connection	Tightening torque, min.	0.4 Nm
Tightening torque, max.	0.6 Nm	Clamping range, rated connection	2.5 mm <sup>2</sup>
Clamping range, min.	0.5 mm <sup>2</sup>	Clamping range, max.	2.5 mm <sup>2</sup>
Wire connection cross section AWG, min.	AWG 26	Wire connection cross section AWG, max.	AWG 12

Creation date September 15, 2020 9:54:43 PM CEST

**Data sheet**

**ACT20P  
ACT20P-CI1-CO-OLP-S**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data**

**Classifications**

ETIM 6.0	EC002475	ETIM 7.0	EC002475
eClass 9.0	27-21-01-23	eClass 9.1	27-21-01-23
eClass 10.0	27-21-01-23		

**Product information**

Product information      The ACT20P-CIX-CO-OLP-S single-channel fixed passive isolator isolates analogue standard current source signals. An analogue input current signal is converted linear and galvanic isolated into an analogue output current signal. The device is powered via the output current loop.

Features

- 2-way galvanic isolation between input and output.

**Approvals**

Approvals



ROHS      Conform

**Downloads**

Approval/Certificate/Document of Conformity	<a href="#">ATEX Certification</a> <a href="#">IECEX Certification</a> <a href="#">Declaration of Conformity</a>
Engineering Data	<a href="#">EPLAN</a>
Engineering Data	<a href="#">STEP</a>
User Documentation	<a href="#">Instruction sheet</a>


**Data sheet**

**ACT20P  
ACT20P-CI1-CO-OLP-S**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Drawings**

**Connection diagram**

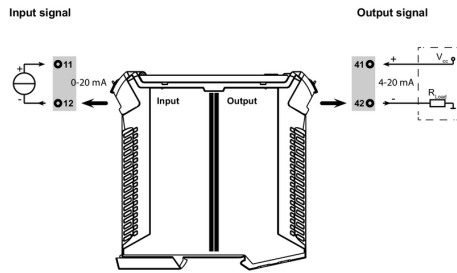

**Dimensioned drawing**

