




ATM ATM Series™ SR01

Extended Strain Relief Series


Available in 2, 3, 4, 6, 8 and 12 position



Amphenol Sine Systems' **ATM Series™ SR01** connectors are a high-performance, thermoplastic, cost-effective solution with specifically-designed, wire cavities that protect each individual wire seal, eliminating stress on the rear seal while maintaining an IP68/69K rated (mated) performance regardless of wire bundle direction or improper installation. **The ATM Series™ SR01 meets all the performance criteria and specifications of the ATM Series™**, is available in a wide variety of custom colors, and accepts all **A Series™** Size 20 contacts. Required wedgelock sold separately.



PROTECTS each wire cavity to maximize sealing integrity.

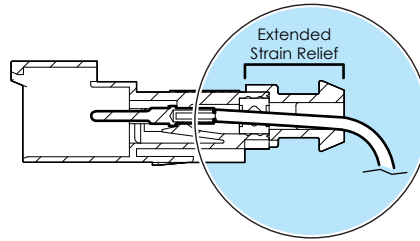

MAINTAINS proper wire routing 100% of the time.



Standard Diameter Rear Seals (Red) -
1.35mm (.053") - 3.05mm (.120")


Applications: Marine, Heavy Equipment, Agricultural, Automotive, Alternative Energy, as well as other demanding interconnect applications

Key Features


- Heat-shrink capable shroud for applications requiring heat shrink (The use of heat shrink is NOT required to meet existing IP standards)
- Enhanced Sealing Plugs for simplified insertion/removal, improved retention capabilities and include a positive 'stop' for full insertion verification
- Thermoplastic housing with excellent UV resistance
- Wedgelocks ensure proper contact alignment & retention
- Integrated latch for mating ensures a secure connection
- Superior front and rear environmental sealing
- Compatible with existing standard products industry-wide



Standard vs SR01



Heat-Shrink Capable Shroud



Enhanced Sealing Plugs



Standard products. Custom solutions
Customer Service +1 800 394 7732


Specifications

Operating Temperature	-55°C to +125°C	Vibration	Continued continuity without degradation to mechanical or physical attributes following vibration. (Max acceleration 20 g's at Sine sweep of 10-2000Hz)
Max Current Rating (Amp)	7.5A		
Mating Cycles	>100	Connector Terminal Retention	When subjected to a direct pull, contacts achieve a minimum pull-out force of 25 lbs.
IP Rating	IP68/69K (in mated condition)		
Wire Range	Size 20, 16-22AWG	Connector Retention	A mated connector subjected to a pulling force by the exiting wire bundle at 25 lbs. times the number of contacts to a maximum of 100 lbs. applying load for 30 seconds
Contacts	Machined; Stamped & Formed; Copper Alloy, Nickel-Plated Gold plating optional		
Housing/Latch Material	Thermoplastic/Integrated latch for mating	Thermal Shock	Subjected to 10 cycles at -55°C to +125°C with no cracking, chipping or other damage detrimental to the normal operation of the connector
Sealing Material	Silicone Rubber		
Dielectric Withstanding Voltage	Less than 2 mA current leakage @ 1500V AC		
Insulation Resistance	1000 megohms minimum at 25°C		
Shock	No latch disengagement or discontinuity shall be the result when subjected to 50 g's in each of three axis (X, Y & Z)		

Custom Color Options

Black	Grey	Brown	Blue	White	Yellow	Green	Red	Orange
-------	------	-------	------	-------	--------	-------	-----	--------


Part Numbering Sequence (2, 3, 4 and 6 position)

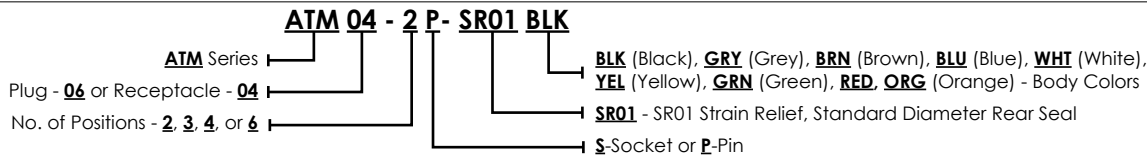




Part Numbering Sequence (08 and 12 position)





2 Position - ATM Series™ SR01 Plugs and Wedgelocks (Plug shown in Standard Grey w Black Strain Relief)

Image	Part Number	Description	Size	Amp
	ATM06-2S-SR01BK	2 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Black Body (Requires Wedgelock AWM-2S. Keyed Options Available.)	20	7.5A
	ATM06-2S-SR01BL	2 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Blue Body (Requires Wedgelock AWM-2S. Keyed Options Available.)	20	7.5A
	ATM06-2S-SR01BN	2 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Brown Body (Requires Wedgelock AWM-2S. Keyed Options Available.)	20	7.5A
	ATM06-2S-SR01GN	2 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Green Body (Requires Wedgelock AWM-2S. Keyed Options Available.)	20	7.5A
	ATM06-2S-SR01GY	2 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Grey Body (Requires Wedgelock AWM-2S. Keyed Options Available.)	20	7.5A
	ATM06-2S-SR01OR	2 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Orange Body (Requires Wedgelock AWM-2S. Keyed Options Available.)	20	7.5A
	ATM06-2S-SR01RD	2 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Red Body (Requires Wedgelock AWM-2S. Keyed Options Available.)	20	7.5A
	ATM06-2S-SR01WT	2 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, White Body (Requires Wedgelock AWM-2S. Keyed Options Available.)	20	7.5A
	ATM06-2S-SR01YL	2 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Yellow Body (Requires Wedgelock AWM-2S. Keyed Options Available.)	20	7.5A



2 Position - ATM Series™ SR01 Plugs and Wedgelocks (Plug shown in Standard Grey w Black Strain Relief), cont.

Image	Part Number	Description	Size	Amp
	AWM-2S	2 Position, Plug Wedgelock, Orange	-	-
	AWM-2SA	2 Position, Plug Wedgelock, Keyed A, Grey	-	-
	AWM-2SB	2 Position, Plug Wedgelock, Keyed B, Black	-	-



3 Position - ATM Series™ SR01 Plugs and Wedgelocks (Plug shown in Standard Grey w Black Strain Relief)

	ATM06-3S-SR01BK	3 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Black Body (Requires Wedgelock AWM-3S.)	20	7.5A
	ATM06-3S-SR01BL	3 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Blue Body (Requires Wedgelock AWM-3S.)	20	7.5A
	ATM06-3S-SR01BN	3 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Brown Body (Requires Wedgelock AWM-3S.)	20	7.5A
	ATM06-3S-SR01GN	3 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Green Body (Requires Wedgelock AWM-3S.)	20	7.5A
	ATM06-3S-SR01GY	3 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Grey Body (Requires Wedgelock AWM-3S.)	20	7.5A
	ATM06-3S-SR01OR	3 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Orange Body (Requires Wedgelock AWM-3S.)	20	7.5A
	ATM06-3S-SR01RD	3 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Red Body (Requires Wedgelock AWM-3S.)	20	7.5A
	ATM06-3S-SR01WT	3 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, White Body (Requires Wedgelock AWM-3S.)	20	7.5A
	ATM06-3S-SR01YL	3 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Yellow Body (Requires Wedgelock AWM-3S.)	20	7.5A
	AWM-3S	3 Position, Plug Wedgelock, Orange	-	-



4 Position - ATM Series™ SR01 Plugs and Wedgelocks (Plug shown in Standard Grey w Black Strain Relief)

	ATM06-4S-SR01BK	4 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Black Body (Requires Wedgelock AWM-4S.)	20	7.5A
	ATM06-4S-SR01BL	4 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Blue Body (Requires Wedgelock AWM-4S.)	20	7.5A
	ATM06-4S-SR01BN	4 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Brown Body (Requires Wedgelock AWM-4S.)	20	7.5A
	ATM06-4S-SR01GN	4 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Green Body (Requires Wedgelock AWM-4S.)	20	7.5A
	ATM06-4S-SR01GY	4 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Grey Body (Requires Wedgelock AWM-4S.)	20	7.5A
	ATM06-4S-SR01OR	4 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Orange Body (Requires Wedgelock AWM-4S.)	20	7.5A
	ATM06-4S-SR01RD	4 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Red Body (Requires Wedgelock AWM-4S.)	20	7.5A
	ATM06-4S-SR01WT	4 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, White Body (Requires Wedgelock AWM-4S.)	20	7.5A
	ATM06-4S-SR01YL	4 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Yellow Body (Requires Wedgelock AWM-4S.)	20	7.5A
	AWM-4S	4 Position, Plug Wedgelock, Orange	-	-



6 Position - ATM Series™ SR01 Plugs and Wedgelocks (Plug shown in Standard Grey w Black Strain Relief)

Image	Part Number	Description	Size	Amp
	ATM06-6S-SR01BK	6 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Black Body (Requires Wedgelock AWM-6S.)	20	7.5A
	ATM06-6S-SR01BL	6 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Blue Body (Requires Wedgelock AWM-6S.)	20	7.5A
	ATM06-6S-SR01BN	6 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Brown Body (Requires Wedgelock AWM-6S.)	20	7.5A
	ATM06-6S-SR01GN	6 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Green Body (Requires Wedgelock AWM-6S.)	20	7.5A
	ATM06-6S-SR01GY	6 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Grey Body (Requires Wedgelock AWM-6S.)	20	7.5A
	ATM06-6S-SR01OR	6 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Orange Body (Requires Wedgelock AWM-6S.)	20	7.5A
	ATM06-6S-SR01RD	6 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Red Body (Requires Wedgelock AWM-6S.)	20	7.5A
	ATM06-6S-SR01WT	6 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, White Body (Requires Wedgelock AWM-6S.)	20	7.5A
	ATM06-6S-SR01YL	6 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Yellow Body (Requires Wedgelock AWM-6S.)	20	7.5A
	AWM-6S	6 Position, Plug Wedgelock, Orange	-	-





8 Position - ATM Series™ SR01 Plugs and Wedgelocks (Plug shown in Standard Grey w Black Strain Relief)

	ATM06-08SA-SR1GY	8 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Keyed A, Grey Body (Requires Wedgelock AWM-8S.)	20	7.5A
	ATM06-08SB-SR1BK	8 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Keyed B, Black Body (Requires Wedgelock AWM-8S.)	20	7.5A
	ATM06-08SC-SR1GN	8 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Keyed C, Green Body (Requires Wedgelock AWM-8S.)	20	7.5A
	ATM06-08SD-SR1BN	8 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Keyed D, Brown Body (Requires Wedgelock AWM-8S.)	20	7.5A
	AWM-8S	8 Position, Plug Wedgelock, Orange	-	-

12 Position - ATM Series™ SR01 Plugs and Wedgelocks (Plug shown in Standard Grey w Black Strain Relief)

	ATM06-12SA-SR1GY	12 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Keyed A, Grey Body (Requires Wedgelock AWM-12S.)	20	7.5A
	ATM06-12SB-SR1BK	12 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Keyed A, Black Body (Requires Wedgelock AWM-12S.)	20	7.5A
	ATM06-12SC-SR1GN	12 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Keyed A, Green Body (Requires Wedgelock AWM-12S.)	20	7.5A
	ATM06-12SD-SR1BN	12 Position, Plug, Socket, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Keyed A, Brown Body (Requires Wedgelock AWM-12S.)	20	7.5A
	AWM-12S	12 Position, Plug Wedgelock, Orange	-	-



2 Position - ATM Series™ SR01 Receptacles and Wedgelocks (Receptacle shown in Standard Grey w Black Strain Relief)

Image	Part Number	Description	Size	Amp
	ATM04-2P-SR01BK	2 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Black Body (Requires Wedgelock AWM-2P. Keyed Options Available.)	20	7.5A
	ATM04-2P-SR01BL	2 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Blue Body (Requires Wedgelock AWM-2P. Keyed Options Available.)	20	7.5A
	ATM04-2P-SR01BN	2 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Brown Body (Requires Wedgelock AWM-2P. Keyed Options Available.)	20	7.5A
	ATM04-2P-SR01GN	2 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Green Body (Requires Wedgelock AWM-2P. Keyed Options Available.)	20	7.5A
	ATM04-2P-SR01GY	2 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Grey Body (Requires Wedgelock AWM-2P. Keyed Options Available.)	20	7.5A
	ATM04-2P-SR01OR	2 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Orange Body (Requires Wedgelock AWM-2P. Keyed Options Available.)	20	7.5A
	ATM04-2P-SR01RD	2 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Red Body (Requires Wedgelock AWM-2P. Keyed Options Available.)	20	7.5A
	ATM04-2P-SR01WT	2 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, White Body (Requires Wedgelock AWM-2P. Keyed Options Available.)	20	7.5A
	ATM04-2P-SR01YL	2 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Yellow Body (Requires Wedgelock AWM-2P. Keyed Options Available.)	20	7.5A
	AWM-2P	2 Position, Receptacle Wedgelock, Orange	-	-
	AWM-2PA	2 Position, Receptacle Wedgelock, Keyed A, Grey	-	-
	AWM-2PB	2 Position, Receptacle Wedgelock, Keyed B, Black	-	-

3 Position - ATM Series™ SR01 Receptacles and Wedgelocks (Receptacle shown in Standard Grey w Black Strain Relief)

	ATM04-3P-SR01BK	3 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Black Body (Requires Wedgelock AWM-3P.)	20	7.5A
	ATM04-3P-SR01BL	3 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Blue Body (Requires Wedgelock AWM-3P.)	20	7.5A
	ATM04-3P-SR01BN	3 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Brown Body (Requires Wedgelock AWM-3P.)	20	7.5A
	ATM04-3P-SR01GN	3 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Green Body (Requires Wedgelock AWM-3P.)	20	7.5A
	ATM04-3P-SR01GY	3 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Grey Body (Requires Wedgelock AWM-3P.)	20	7.5A
	ATM04-3P-SR01OR	3 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Green Body (Requires Wedgelock AWM-3P.)	20	7.5A
	ATM04-3P-SR01RD	3 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Red Body (Requires Wedgelock AWM-3P.)	20	7.5A
	ATM04-3P-SR01WT	3 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, White Body (Requires Wedgelock AWM-3P.)	20	7.5A
	ATM04-3P-SR01YL	3 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Yellow Body (Requires Wedgelock AWM-3P.)	20	7.5A
	AWM-3P	3 Position, Receptacle Wedgelock, Orange	-	-


4 Position - ATM Series™ SR01 Receptacles and Wedgelocks (Receptacle shown in Standard Grey w Black Strain Relief)

Image	Part Number	Description	Size	Amp
	ATM04-4P-SR01BK	4 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Black Body (Requires Wedgelock AWM-4P.)	20	7.5A
	ATM04-4P-SR01BL	4 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Blue Body (Requires Wedgelock AWM-4P.)	20	7.5A
	ATM04-4P-SR01BN	4 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Brown Body (Requires Wedgelock AWM-4P.)	20	7.5A
	ATM04-4P-SR01GN	4 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Green Body (Requires Wedgelock AWM-4P.)	20	7.5A
	ATM04-4P-SR01GY	4 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Grey Body (Requires Wedgelock AWM-4P.)	20	7.5A
	ATM04-4P-SR01OR	4 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Orange Body (Requires Wedgelock AWM-4P.)	20	7.5A
	ATM04-4P-SR01RD	4 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Red Body (Requires Wedgelock AWM-4P.)	20	7.5A
	ATM04-4P-SR01WT	4 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, White Body (Requires Wedgelock AWM-4P.)	20	7.5A
	ATM04-4P-SR01YL	4 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Yellow Body (Requires Wedgelock AWM-4P.)	20	7.5A
	AWM-4P	4 Position, Receptacle Wedgelock, Orange	-	-


6 Position - ATM Series™ SR01 Receptacles and Wedgelocks (Receptacle shown in Standard Grey w Black Strain Relief)

	ATM04-6P-SR01BK	6 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Black Body (Requires Wedgelock AWM-6P.)	20	7.5A
	ATM04-6P-SR01BL	6 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Blue Body (Requires Wedgelock AWM-6P.)	20	7.5A
	ATM04-6P-SR01BN	6 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Brown Body (Requires Wedgelock AWM-6P.)	20	7.5A
	ATM04-6P-SR01GN	6 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Green Body (Requires Wedgelock AWM-6P.)	20	7.5A
	ATM04-6P-SR01GY	6 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Grey Body (Requires Wedgelock AWM-6P.)	20	7.5A
	ATM04-6P-SR01OR	6 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Orange Body (Requires Wedgelock AWM-6P.)	20	7.5A
	ATM04-6P-SR01RD	6 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Red Body (Requires Wedgelock AWM-6P.)	20	7.5A
	ATM04-6P-SR01WT	6 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, White Body (Requires Wedgelock AWM-6P.)	20	7.5A
	ATM04-6P-SR01YL	6 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Yellow Body (Requires Wedgelock AWM-6P.)	20	7.5A
	AWM-6P	6 Position, Receptacle Wedgelock, Orange	-	-



8 Position - ATM Series™ SR01 Receptacles and Wedgelocks (Receptacle shown in Standard Grey w Black Strain Relief)

	ATM04-08PA-SR1GY	8 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Keyed A, Grey Body (Requires Wedgelock AWM-8P.)	20	7.5A
	ATM04-08PB-SR1BK	8 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Keyed B, Black Body (Requires Wedgelock AWM-8P.)	20	7.5A
	ATM04-08PC-SR1GN	8 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Keyed C, Green Body (Requires Wedgelock AWM-8P.)	20	7.5A
	ATM04-08PD-SR1BN	8 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Keyed D, Brown body (Requires Wedgelock AWM-8P.)	20	7.5A

8 Position - ATM Series™ SR01 Receptacles and Wedgelocks (Receptacle shown in Standard Grey w Black Strain Relief), cont.

Image	Part Number	Description	Size	Amp
	AWM-8P	8 Position, Receptacle Wedgelock, Orange	-	-

12 Position - ATM Series™ SR01 Receptacles and Wedgelocks (Receptacle shown in Standard Grey w Black Strain Relief)

	ATM04-12PA-SR1GY	12 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Keyed A, Grey Body (Requires Wedgelock AWM-12P.)	20	7.5A
	ATM04-12PB-SR1BK	12 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Keyed B, Black Body (Requires Wedgelock AWM-12P.)	20	7.5A
	ATM04-12PC-SR1GN	12 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Keyed C, Green Body (Requires Wedgelock AWM-12P.)	20	7.5A
	ATM04-12PD-SR1BN	12 Position, Receptacle, Pin, Standard Diameter Rear Seal (Red), SR01 Strain Relief, Keyed D, Brown body (Requires Wedgelock AWM-12P.)	20	7.5A
	AWM-12P	12 Position, Receptacle Wedgelock, Orange	-	-

ATM Series™ SR01 Accessories

	ATM13-217-2005-SR	Blank Locking Sealing Plug, Blue, Replaces Size 20 Contacts	20	-
---	-------------------	---	----	---

For more information, contact: Customer Service, +1 800 394 7732, csr@amphenol-sine.com

© 2018 Amphenol Sine Systems Corporation, 44274 Morley Drive, Clinton Township MI 48036 USA. www.amphenol-sine.com. Customer Service +1 800 394 7732 Every effort has been made to ensure that the information contained in this document is accurate at the time of publication. Specifications or information stated in this document are subject to change without notice.