

т	۵	п –	т	0



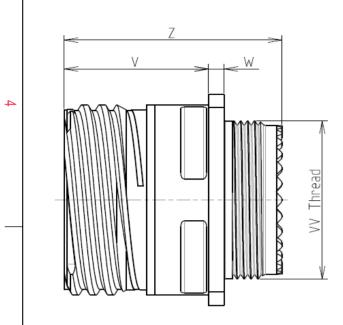

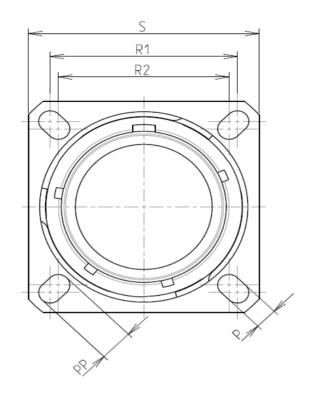

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 19

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium			
-Shell Plating	: Nickel			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	: -65°C to +200°C			

: 48 hours

8D 0

G

19

F

28

S


F

Е

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	29.36
R2	26.97
S	36.5±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M28x1-6g

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

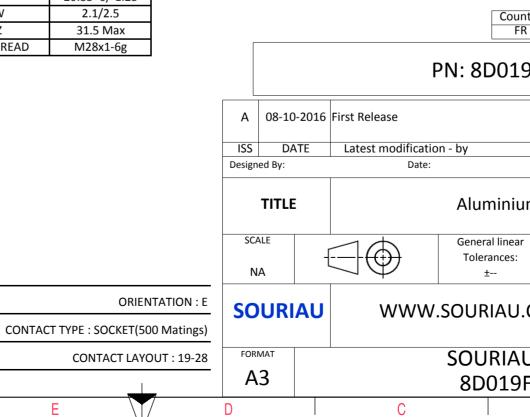

σ		A			
				4	
AS EXAMPLE				3	
any non-conformits which does not co er of the Parties or I adation, technical n untry Jurisc FR 9F28SE	mply with by a third part			2	
	CUSTOME	R DRAWING	MOD N°		
um Receptacle 8D series					
ar :	NPRDS / PROJECT 859				
.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				1	
U DRG N° F28SE-C	1		SHEET		
B		A	_, _	J	
<u> </u>	1				

	工	۵	н г	m	D	O	
		Contact Layout					Panel Cutout
4					A	SQUARE FLANGE RECEPTACLE (TY REAR MOUNTING R1	PE 0)
	Contact Contact line position X-avis ID (mm) A +.066 (1.66)	Y-axis (mm) Contact position ID X-axis (mm) Y-axis (mm) +.353 (8.97) R 286 (7.26) +.217 (5.51)			حــــــــــــــــــــــــــــــــــــ		
ω	C + 266 (7.26) D + 345 (8.76) E + 357 (9.07) F + 321 (8.15) G + 242 (6.15) H + 130 (3.30) J + 000 (0.00) K - 130 (3.30) L - 242 (6.15) M - 327 (8.76) N - 357 (9.07) P - 345 (8.76)	+.305 (7.75) S 189 (4.80) +.305 (7.75) +.217 (55.1) T 066 (1.68) +.353 (8.97) +.098 (2.49) U +.000 (0.00) +.230 (5.84) 033 (0.84) V +.124 (3.15) +.193 (4.90) 160 (4.06) W +.209 (5.31) +.095 (2.41) 265 (6.73) X +.228 (5.79) 033 (0.84) 335 (8.51) Y +.174 (4.42) 151 (3.84) 335 (8.51) Z +.174 (4.42) 151 (3.84) 335 (8.51) B 726 (5.73) +.000 (0.00) 191 (4.85) 335 (8.51) B 174 (4.42) 151 (3.84) 326 (6.73) L 335 (8.51) B 124 (3.15) +.193 (0.84) 100 (0.00) 191 (4.85) 100 (4.06) C 209 (5.31) +.193 (4.90) +.098 (2.49) ±.124 (3.15) +.193 (4.90) +.098 (2.49) ±.000 (0.00) +.062 (1.57) .114 (3.15) +.193 (4.90) ±.098 (2.49) ±.000 (0.00) ±.062 (1.57) .116 (2.52) .116 (2.52) <td< td=""><td></td><td></td><td></td><td></td><td>Dim ØA ØAA R1 ØT</td></td<>					Dim ØA ØAA R1 ØT
	-					SOURIAU shall no	t he liable for any
20						due to a use of the Specifications is	the Products whi
						PI	N: 8D019F
					A 08-10-20 ISS DATE Designed By:	L6 First Release Latest modification Date:	- by
					SCALE		Aluminium General linear
_					NA		Tolerances: ±
					SOURIA		SOURIAU.CO
					FORMAT A3		SOURIAU 8D019F2
l	Н	G	F	E	D	С	

