



THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



| ISSUE NUMBER | |
|--------------|---|
| ORIGINAL | 1 |

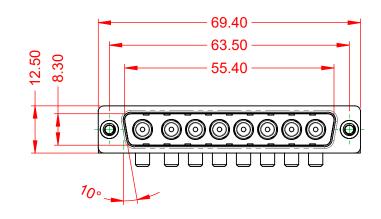



NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:


THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, 30µ" GOLD PLATED

10.67 \bigcirc $\widehat{}$ \cap \cap 13.20-

| OPERATING TEMPERATURE: | -55°C ~ 125°C |
|--|-----------------------------|
| POWER/CO-AX CONTACT RATING: (IF PRESENT) | 40A (CURRENT) |
| SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE: | 5A PER CONTACT 10mΩ MAX. |
| INSULATOR RESISTANCE: DIELECTRIC | $5000M\Omega$ min. |

WITHSTANDING VOLTAGE:

1000V AC rms



| | COMBINATION D-SUB | | | SW REFERENCE NO.: 629 COMBO ASSEMBLY | | | |
|--|---|---|-----------------|--------------------------------------|------------------|-----|--|
| | | | DRAWN: | C.B | DATE: JAN. 01/20 |)19 | |
| | | | CHECKED |): | DATE: | | |
| EDAC INC TORONTO, ONTARIO CANADA | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE | SCALE: | (IN C.A.D. 1:1) | SHEET 1 OF | 2 | | |
| | | DRAWING | NUMBER: 629-8W8 | -640-4TC | ISSUE | | |
| YOU | YOUR CONNECTION TO QUALITY & SERVICE | MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. | PART NUN | MBER: 629-8W8 | -640-4TC | 1 | |



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

