


2 DEC 1998 17:19

NO. 571

P. 13/25

1/4/99 to beam

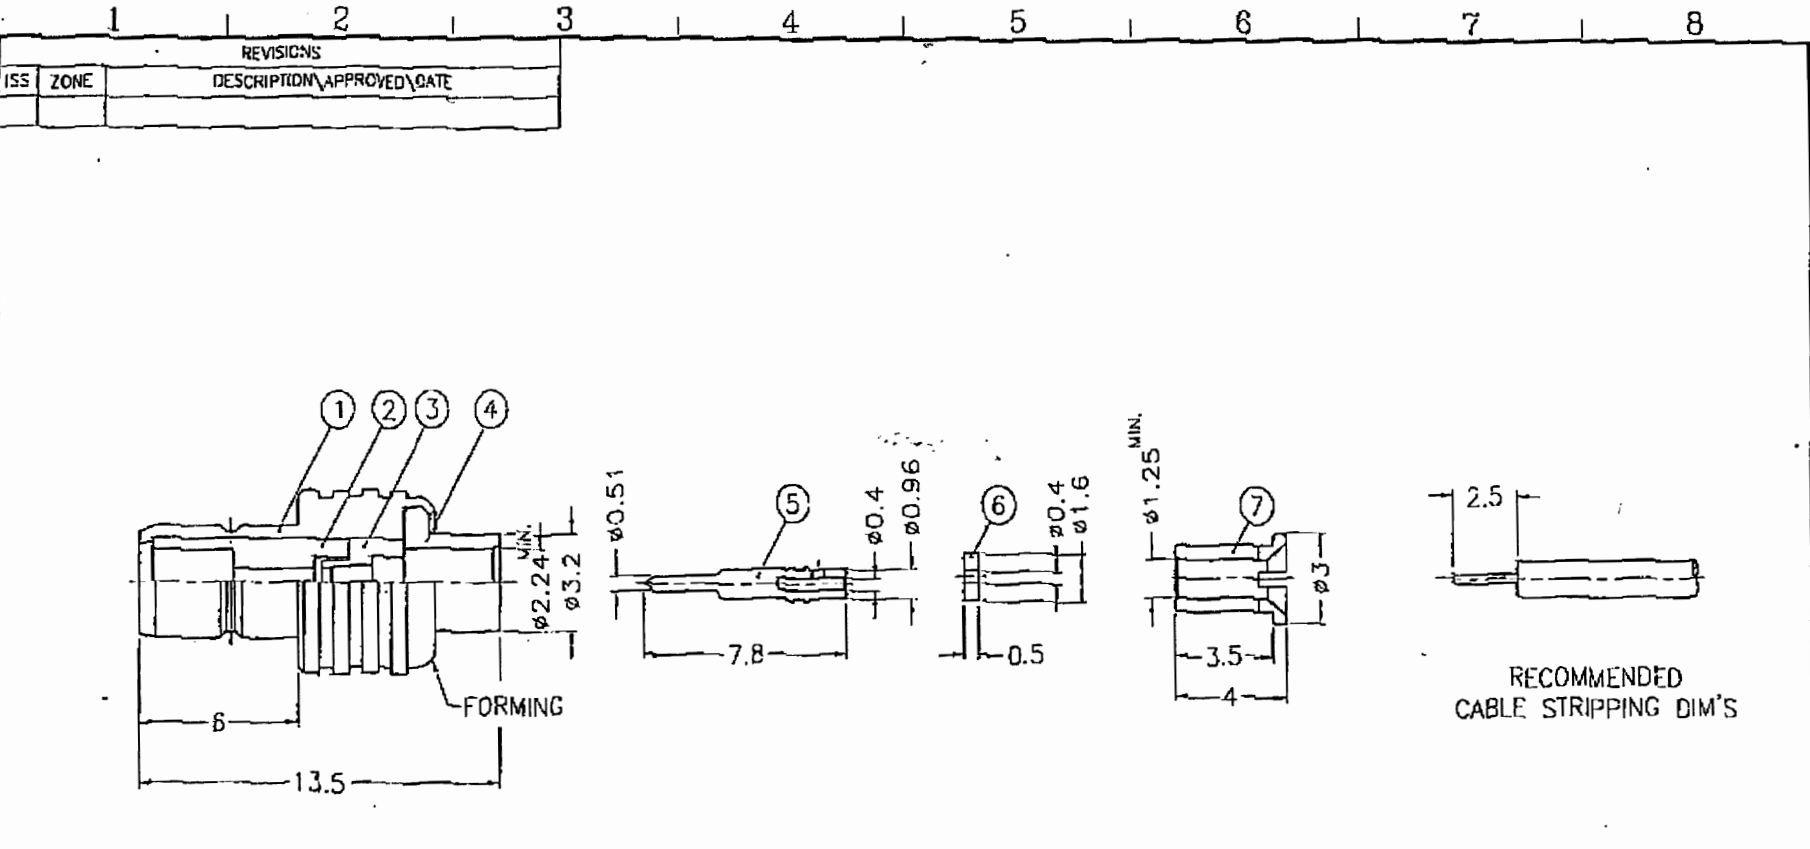

RECOMMENDED  
CABLE STRIPPING DIM'S

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-625
  2. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
  3. GOLD PL. 30 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
  4. TEFLON MIL-P-19468



NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
7	SOLDER BARREL		NOTE 1	NOTE 2	1 SMB1181A1-7
6	INSULATOR		NOTE 4	NATURAL	1 SMB1181A1-5T-5D
5	CONTACT PIN		NOTE 1	NOTE 3	1 SMB1121A1-5-C26/D4
4	BARREL		NOTE 1	NOTE 2	1 SMB6181A1-4-32/224-E
3	INSULATOR		NOTE 4	NATURAL	1 SMB6121B2-3T-5C
2	INSULATOR		NOTE 4	NATURAL	1 SMB1121A1-2T-5D
1	BODY		NOTE 1	NOTE 2	1 SMB1121A1-1-B

DIMENSIONS ARE IN MILLIMETERS		PART NO.		KAI JACK INDUSTRIAL CO., LTD. TAINAN TAIWAN R.O.C.	
UNLESS OTHERWISE SPECIFIED TOLERANCES		142225		TITLE	
0.3-5	±0.2	APPROVED	Golden	DATE	11-10-98
6-30	±0.4	CHECKED	Golden	DATE	11-10-98
30-120	±0.5	DRAWN	KOLI	DATE	11-10-98
120-115	±1			FILE NO.	F:\DWG\5MB\1181A1\047-50\3GT50G
315-1000	±1.5			DRAWING NO.	142225
1000-2000	±2.4			DRAWING NO.	KJ-SMB1181A1-3GT50G-047-50

12/02/98 02:11

TX/RX NO. 6410

P. 013

REVISIONS				
ISS	ZONE	DESCRIPTION	APPROVED	DATE