

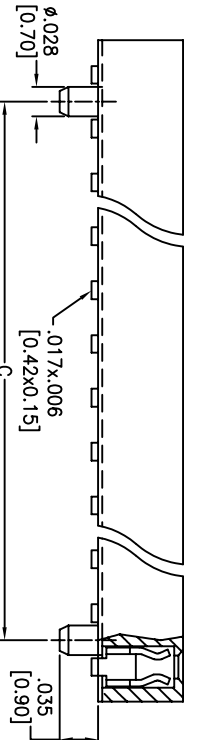
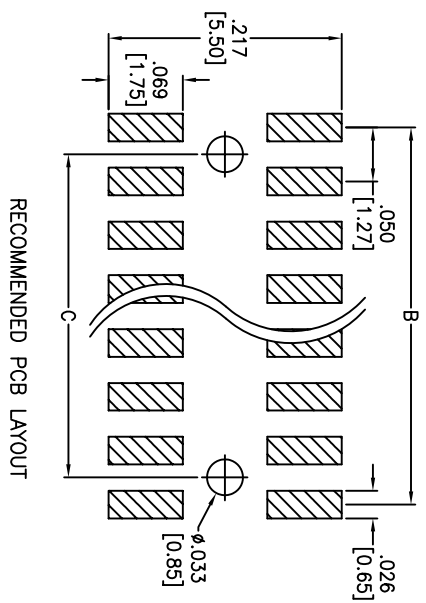


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/5/12	

APPROVED: _____
 DATE: _____ TITLE: _____

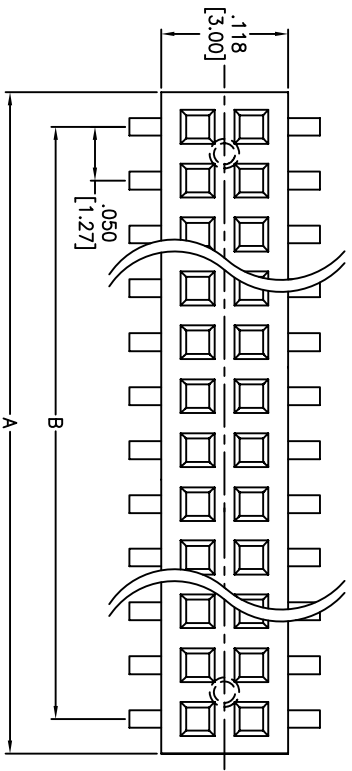

SPECIFICATIONS:
 Material: Insulator: Hi-Temp thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Plating: Gold flash over Nickel underplate overall
 Electrical: Current rating: 1 Amp max
 Contact resistance: 20 mohms max
 Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 300 VAC for 1 minute
 Temperature Rating: Operating temperature: -40°C to +105°C
 Environmental: Lead free, RoHS compliant.

Positions: 06 thru 80
 A = .050 [1.27] x No. of Positions + .009 [0.24]
 B = .050 [1.27] x No. of Spoces
 C = .050 [1.27] x No. of Positions - .100 [2.54]

ADAM TECH

909 Ratway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .050" RECEPTACLE STRIP, DUAL ROW, SMT
 .085" INSULATOR HEIGHT, GOLD PLATED

UNLESS OTHERWISE SPECIFIED		ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED		INCHES	
HOLES		Holes	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XXX	± .015
.XXX	± .015	Ø.XXX	± .010
APPROVALS		DATE	
DRAWN	AY	7/5/12	
CHECKED	LW	7/5/12	
APPROVED			

REF:	SIZE	PART NO.	REV.
X		HRS-2C-XX-G-SMT-P	

