



IS	SUE NUMBER
ORIGINAL	-

(1)

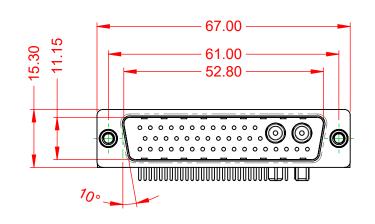




.XX ±0.13 .XXX ±0.05

NOTES:


MATERIAL: HOUSING: SHELL: CONTACT:

WITHSTANDING VOLTAGE:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED



OPERATING TEMPERATURE:	-55°C ~ 125°C	
POWER/CO-AX CONTACT RATING: (IF PRESENT)	50Ω (IMPEDANCE)	
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONTACT 10mΩ MAX.	
INSULATOR RESISTANCE: DIELECTRIC	5000MΩ min.	



	COMBINATION D-SUB		SW REFERENCE NO.: 629 COMBO ASSEMBLY			
			DRAWN: C.B	DATE: JAN. 01/20	19	
			CHECKED:	DATE:		
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2		
	YOUR CONNECTION TO QUALITY & SERVICE	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 629-43W2240-5ND		ISSUE	
YOUR CONNECTION TO			PART NUMBER: 629-43W	2240-5ND	1	

1000V AC rms



COMPLIANT

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

