




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-790191	2007/09/13	WUFEI	Change Nut
C	LEN-920152~55	2008/10/06	Li Xiu Zhi	Change View
D	LEN1710134~37	2017/01/17	Ruru	Change Logo

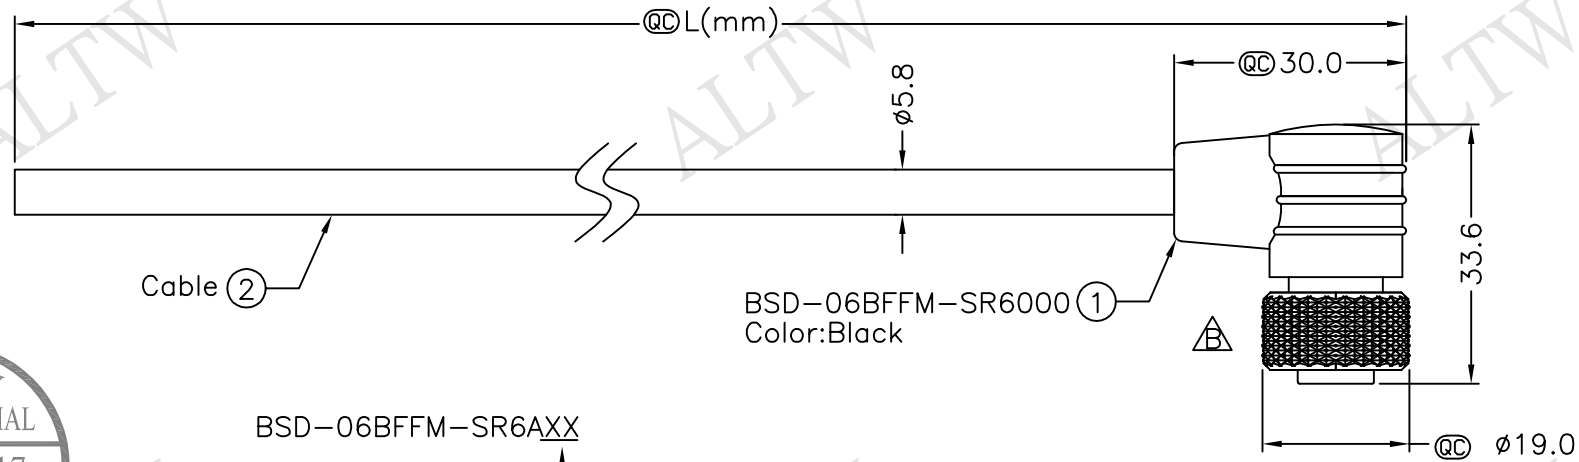

BSD-06BFFM-SR6000
Color:Black

BSD-06BFFM-SR6AXX

- XX:01~99Meter
 - 01:01Meter
 - 02:02Meters
 - ⋮
 - 99:99Meters
- Cable Length(L):01~99Meters

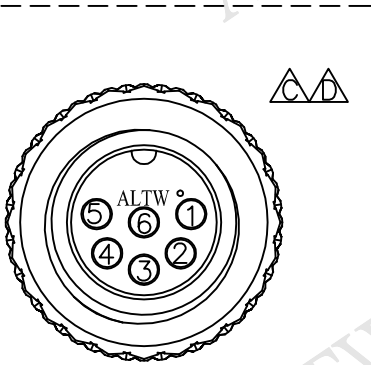

Pin Assignments
Front View

Shield	Drain	地線
6	White	白
5	Red	紅
4	Orange	桔
3	Yellow	黃
2	Green	綠
1	Blue	藍
Conn.	Wire Color	Pin Out

- Note:
- * @C Important Dimension To Check.
 - * Waterproof Rate: IP66
 - * Housing: Black, Nylon+GF
 - * Pin: Copper Alloy, Gold Plated
 - * Cable: Black, UL2464 24#*6C+D+Al/My (UV Resistant) OD=5.8mm
 - * Cable Length Tolerance:
 - 01M:40mm
 - 02M~05M:60mm
 - 06M~10M:100mm
 - 11M~30M:200mm
 - 31M~99M:500mm

UNIT:mm TOLERANCE ±0.5 mm	TITLE Standard, Cable Screw 6Pin F Conn F Pin	SHEET 1 OF 1		Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO BSD-06BFFM-SR6AXX	DRAWN BY Ruru	DATE 2017/01/17
SCALE Free	REV. D	SIZE A4	QC : Inspection Item		CUSTOMER ALTW	CHECKED BY Rita	DATE 2017/01/17	DATE 2017/01/17

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.