


REMOVE INSULATOR PANNEL .401
PACKAGING 10

Series : ACC. COAX

1 / 1

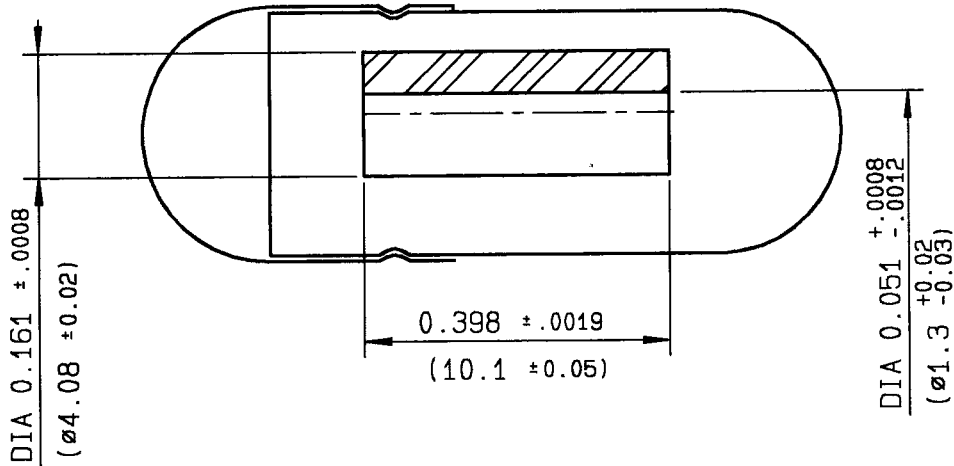

CABLES : NA

CHARACTERISTICS

NOMINAL IMPEDANCE	NA Ω	STANDARDISATION	-
FREQUENCY RANGE	NA GHz		-
TEMPERATURE RATING	-65/+165 °c		-
VSWR	- + - x F(GHz)Max1		-
RF INSERTION LOSS	- √F(GHz) dB Maxi	CABLE RETENTION	0 lb min na N
VOLTAGE RATING	NA V _{rms} Max	CENTER CONTACT RETENTION	
DIELECTRIC WITHSTANDING VOLTAGE	NA V _{rms} min	Axial force - mating end	0 lb min N
INSULATION RESISTANCE	NA MΩ min	Axial force - opposite end	0 lb min N
HERMETIC SEAL	- cc/s - Atm.cm3/s	Torque (Min)	0 Inch.oz cm.N
LEAKAGE (pressurized only)	- psi - MPa	RECOMMENDED TORQUES	
WEIGHT	0 Oz g	Mating	0 Inch.lb cm.N
		Panel nut	0 Inch.lb cm.N NA
		Clamp nut	0 Inch.lb cm.N NA

CONSTRUCTION

CONNECTOR PARTS	MATERIALS	FINISH
BODY	-	-
OUTER CONTACT	-	-
CENTER CONTACT	-	-
INSULATOR	PTFE	-
-	-	-
-	-	-
-	-	-
-	-	-

ISSUE	REVISION No	DESCRIPTION	BY	DATE
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-

Initiated on 14/03/95

The information given here is subject to change without notice. Design changes may be in order to improve the product.



Approval by BONOMINI