

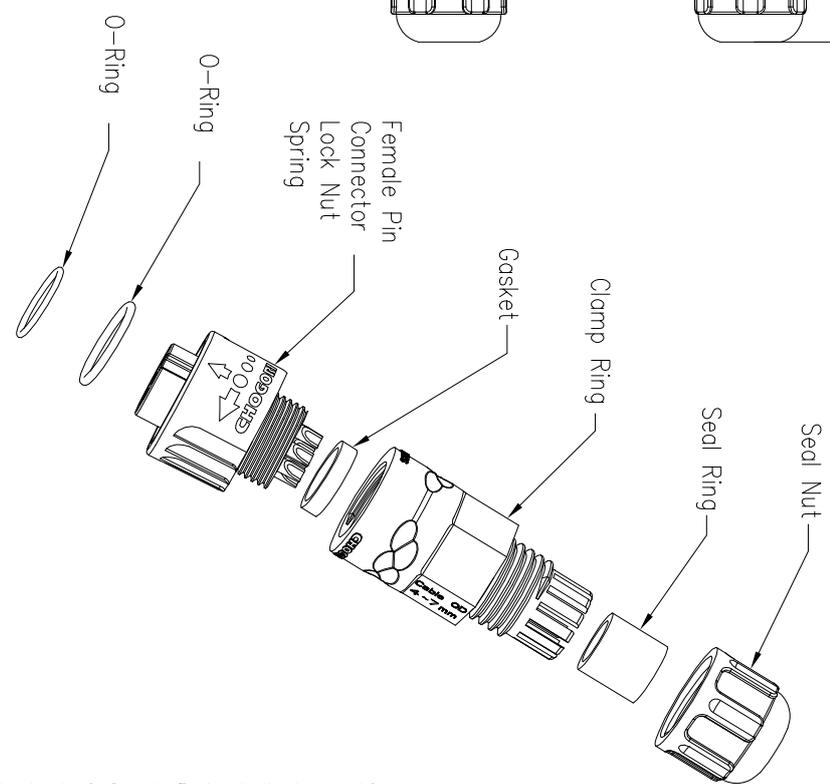
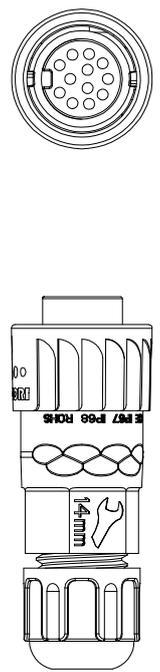


REV.	EN. NO.	DESCRIPTION	SIGN	DATE
C1	N/A	INITIAL DRAWING	Liu	2019/08/13

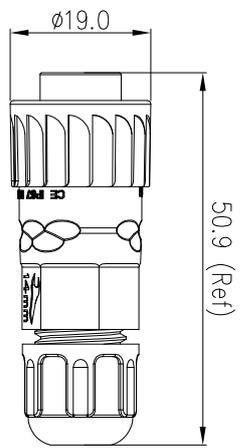

- Specification:
- 1.Operation Temperature: -45°C~105°C.
 - 2.Insulation Resistance: 100MΩ at DC500V.
 - 3.Contact Resistance: <10mΩ
 - 4.Withstand Voltage: 1300V AC
 - 5.Operating Current: 2A
 - 6.Operating Voltage: AC 30V
 7. Waterproof Rate: IP67 (Mated)
 8. Seal Nut: Nylon, Black
 9. Seal Ring: Silicon, Black
 10. Clamp Ring: Nylon, Black
 11. Gasket: Silicon, Red
 12. Female Pin: Copper Alloy, Gold Plated
 13. Connector: Nylon+GF, Black
 14. Lock Nut: Nylon, Orange
 15. Spring: SUS
 16. O-Ring: Silicon, Red
 17. RoHS Compliant.
 18. Cable Range OD: φ3.5mm~φ6.8mm
 19. Mating Cap: 804-00009-00



22XXX231-01
Pin Number
12 Pin
P/N: 22012231-01
Pin Assignments
Front View

DESCRIPTION
Standard Series Push Lock
Male Plug With Female Pin

UNIT: mm	SCALE: 1:1	SHEET: 1	OF: 1
TOLERANCE .X .XX .XXX ANGLES	±0.25 ±0.15 ±0.05 ±1°	REV: C1	SIZE: A4



PART NO 22XXX231-01	DRAWN BY Liu	DATE 2019/08/13
DWG NO	CHECKED BY Mo	DATE 2019/08/13
CUSTOMER	APPROVED BY Pamson	DATE 2019/08/13