

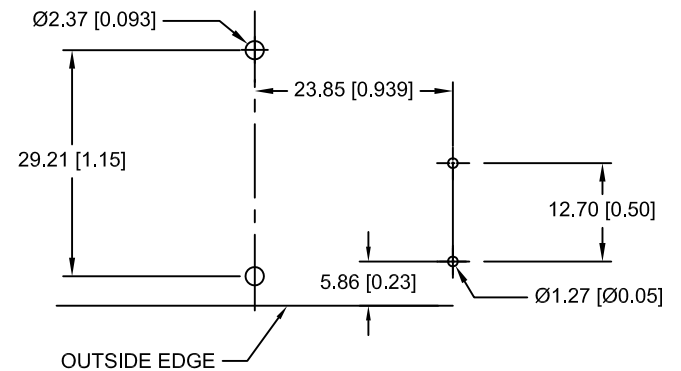
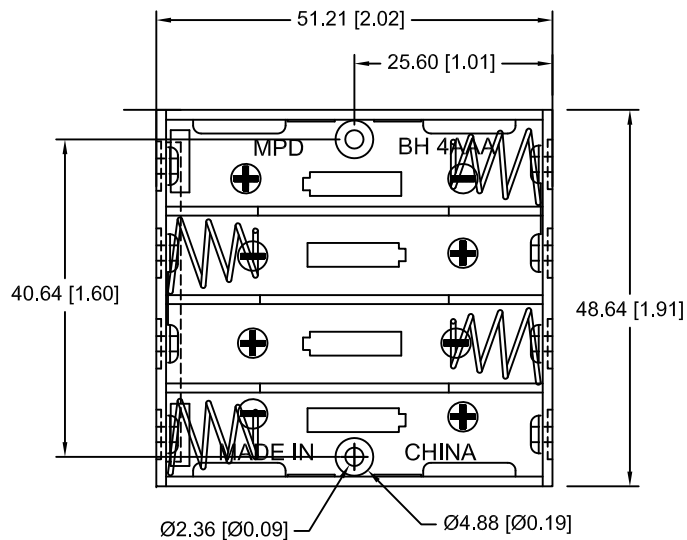


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
5/27/06	A	REDRAWN, ADDED "ROHS COMPLIANT". UPDATED NOTES	T.B.	B.S.	
03/22/13	B	UPDATED TO "ROHS 2 COMPLIANT"	T.B.	B.S.	
06/14/13	C	UPDATED TITLE	T.B.	B.S.	

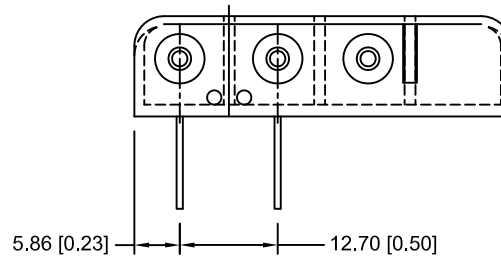


PCB LAYOUT

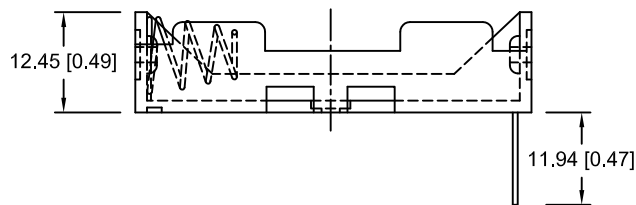

NOTES:
1. MATERIAL:
 HOUSING : HIGH IMPACT NYLON 66, HALOGEN AND PHOSPHOR FREE, UL94V-0, UL FILE NO. E48285
 RIVETS: BRASS, NICKLE PLATED.
 SPRING: 302 STAINLESS STEEL, NICKLE PLATED.
 CROSSOVER WIRE: 24AWG, UL1007, CSA, TR64
 PC PINS: 302 STAINLESS STEEL, NICKEL PLATED.
 TEMPERATURE RANGE: -40°C TO +140°C
 RESISTANT TO SOLVENTS, COMMON OILS AND REFRIGERANTS
 ROHS 2 COMPLIANT

MOUNTING INSTRUCTION:
 USE 2-56 MACHINE SCREWS OR EYELETS 0.089" OD BY 0.15" FLANGE STIMPSON GS-3 SERIES OR EQUIVALENT. ALSO ADHESIVES AND DOUBLE SIDED TAPES WORK WELL.

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By B.S.
			Approved By T.B.
decimal ±.5 (.020)	Title FOUR "AAA" CELL HOLDER WITH PC PINS		
Fractional ± .8 (.030)		Date 06/14/13	Drawing Number BH4AAAPC
Angular ± 3°			