



Electrical Specifications

Center Frequency: 2450 MHz
Bandwidth: 100 MHz
Passband: 2400-2500 MHz
Insertion Loss: 1.9 dB Max
Ripple in BW: 1.0 dB Min
VSWR: 1.5:1
Attenuation: >50 dB @ 2250 MHz
>50 dB @ 2700 MHz
Impedance: 50Ω
Power Handling: 5 Watts Max

Mechanical


Mounting Method: SMT
Dimensions: 20.4 x 14 x 4.65 mm

Environmental

Operating Temperature: -20 to +70° C
Storage Temperature: -30 to +85° C

This product is RoHS compliant.

Outline Drawing:

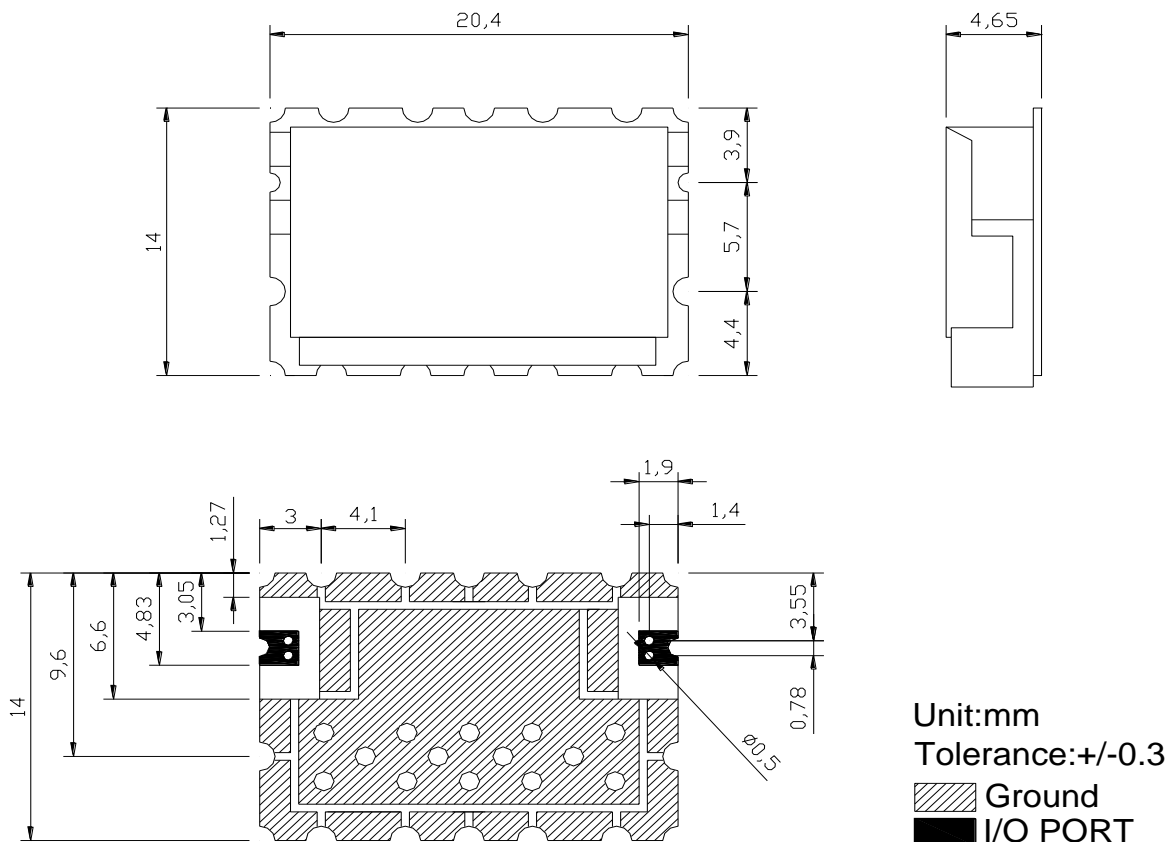



PCB Layout:

