


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	51-00025.M	Connector, PPL7, 7C, 0° plug, 7x38 mm, chrome, solder, Ø2.2-5.2 mm wire, molding style	2	
2	30-00672	Wire, 6C BC, 28 AWG, UL20280, 300V, 80C, 4.7 mm, braided shield, FT2, TPU	1	
3	24-00206	Overmold, PPL7 strian relief, 10x24 mm	2	TPU

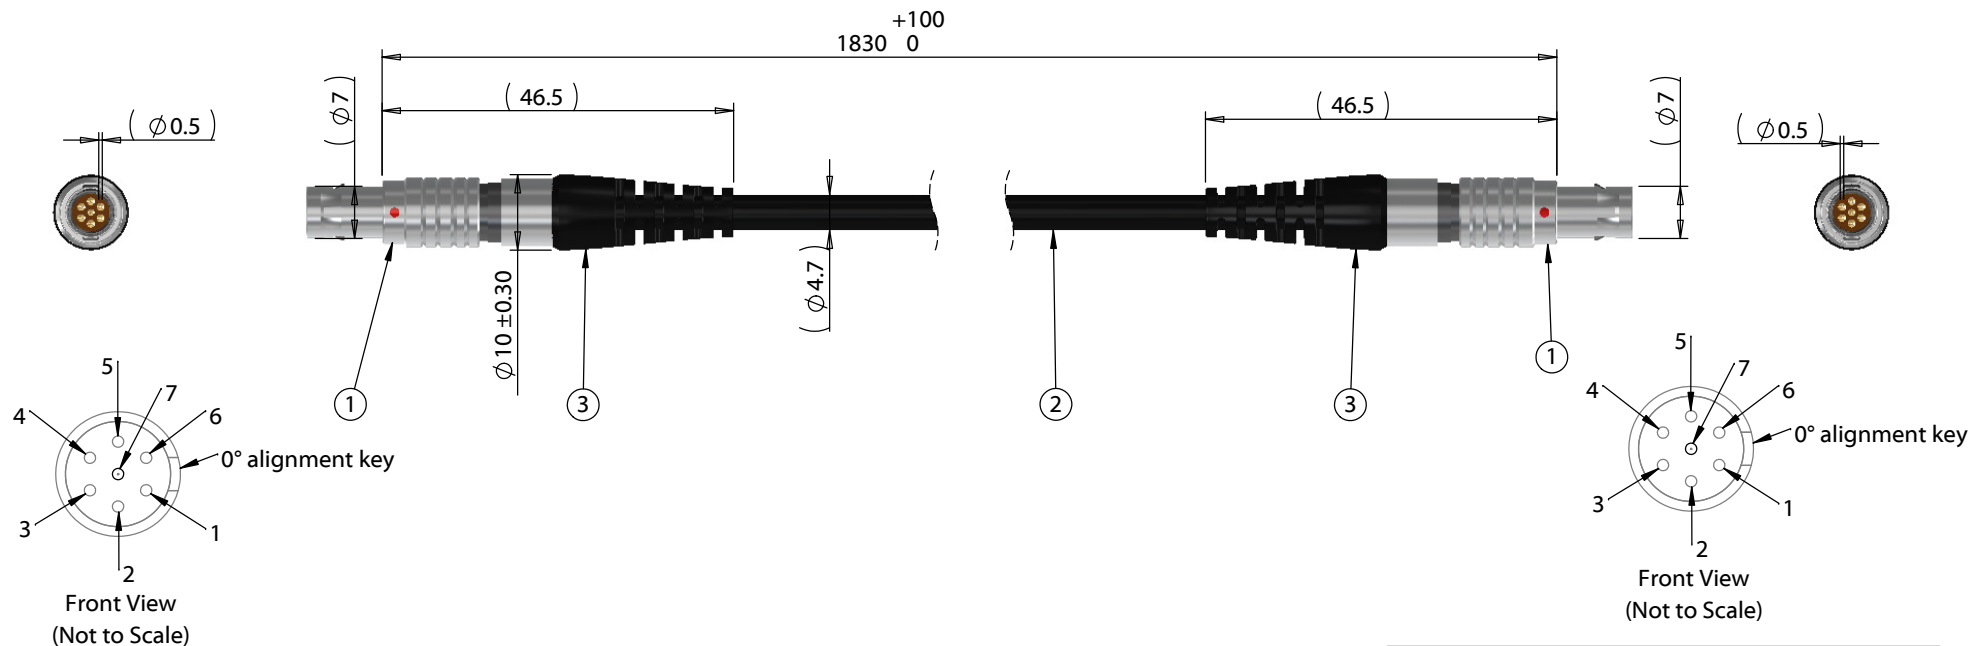

50-00025.M	Wiring Diagram wire color	50-00025.M
1	Red	1
2	White	2
3	Black	3
4	Yellow	4
5	Blue	5
6	Green	6
7	Drain/ Shield	7

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>
A	3/27/2018	Initial release	AG <small>Digitally signed by AG Date: 2018.04.19 16:32:57 -07'00'</small>		
			Verified:	Function test: no open, no short circuit, no intermittent	
			AW <small>Digitally signed by AW Date: 2018.04.19 16:33:22 -07'00'</small>		
			Dimensions are in millimeters.	Description:	Size: Part number:
			Tolerances:	Cable, 1830 mm, 7C PPL7 plug 51-00025.M to same, 28 AWG, UL20280 30-00672	A 10-02267
			X: ± 0.5 mm		Scale: 1:1
			X.X: ± 0.3 mm		
			X.XX: ± 0.05 mm		Sheet 1 of 1

5

4

3

2

1