



ORDER NO	130091-0207
WOODHEAD ENG. NO	998L-3070G20
WIRE GAUGE	12
CONDUCTORS	3
AMPERAGE	20A
WORKING CORD	35 FT. BLACK
CORD TYPE	SJTOW
CONSTRUCTION	STEEL
PAINT	YELLOW POWDER COAT
REEL ENCLOSURE RATING	INDOOR
RETRACTION WEIGHT	3.0 LB [1.4 KG]

FACE VIEW OF LOCKING PLUG



4X DIA.41 [10.3] REF.


2.44 [62.0] REF.

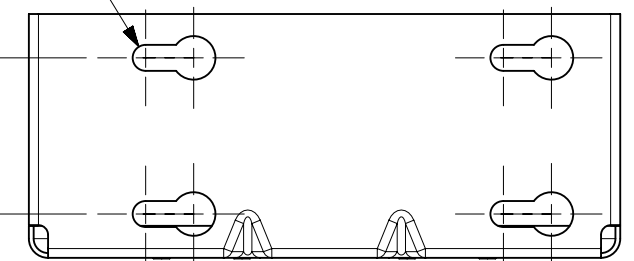


5.59 [142] REF.

NEMA L5-20 LOCKING PLUG COLOR YELLOW

23 IN. 12-3 SJTOW CABLE

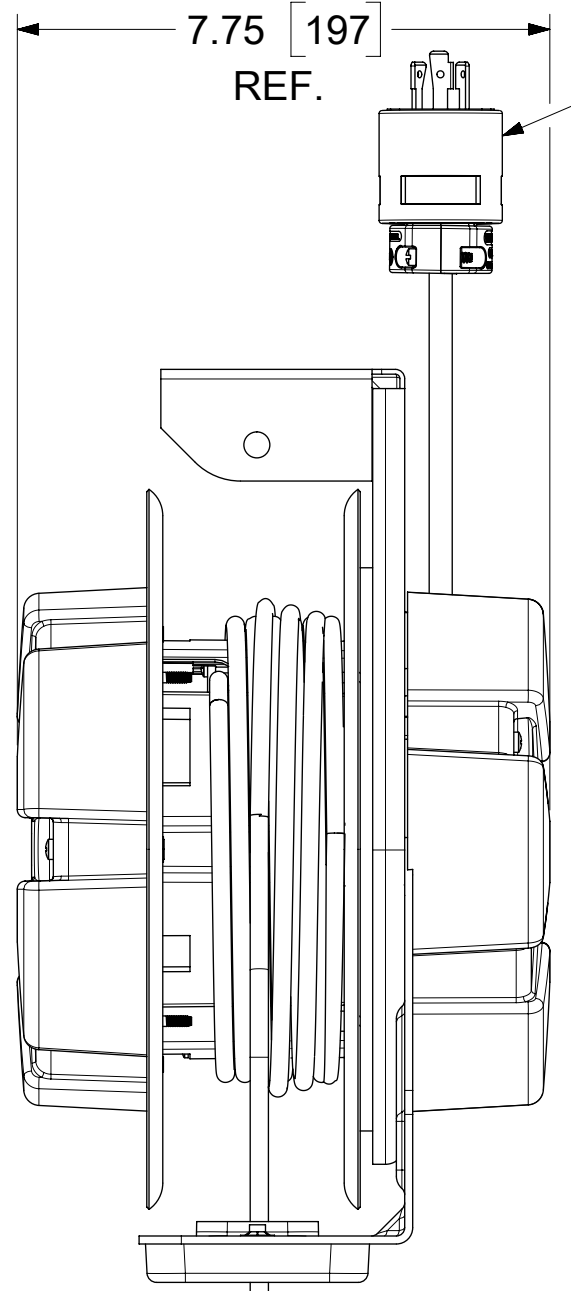

7.75 [197] REF.

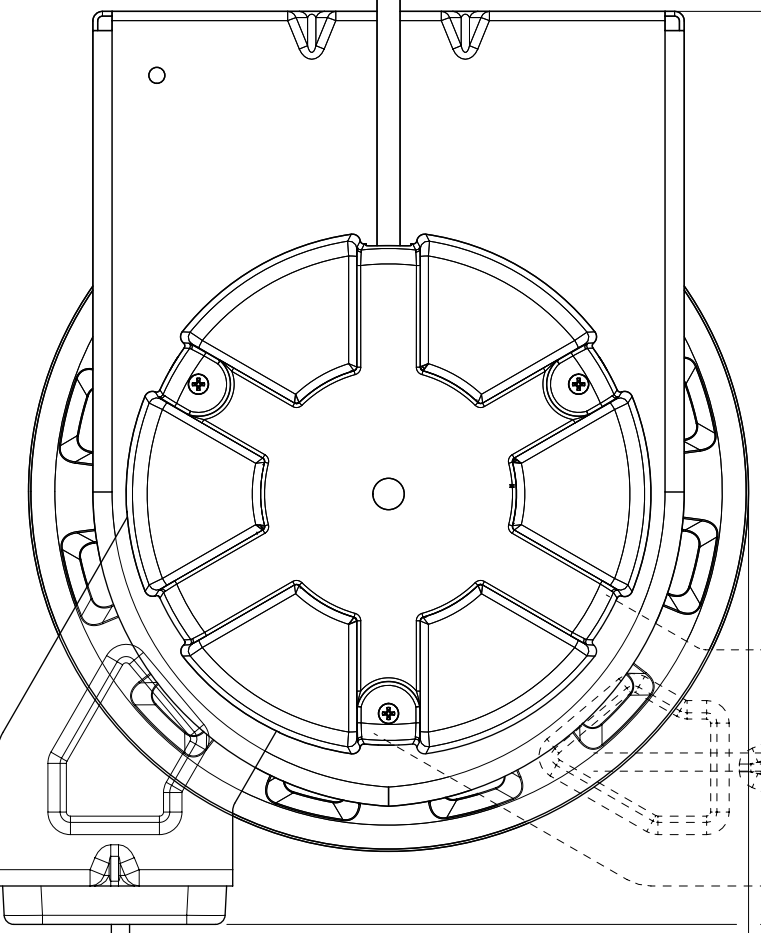

GUIDE ARM CAN ROTATE 90°

14.25 [362] REF.

CABLE STOP

ADJUSTABLE CLAMP

11.75 [298.4] REF.

NEMA 5-20 GFCI DUPLEX RECEPTACLE, ONE SIDE ONLY

FLIP LID COLOR: YELLOW

BLANK PLATE

NEOTEX RUBBER ENCLOSURE

3.91 [99] REF.

2.5 [64] REF.

4.4 [112] REF.

NOTES:

1. CABLE GUIDE IS ADJUSTABLE - DUAL POSITION
2. RATCHET LOCK IS EASY TO DISENGAGE FOR CONSTANT TENSION
3. REEL CANNOT BE "LOCKED OUT" AT FULL TENSION
4. CABLE STOP INCULDED

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
	DIMENSION UNITS	SCALE		CURRENT REV DESC:
$\frac{F}{A} = 0$	INCH/MM	NTS		
$\frac{F}{E} = 0$	GENERAL TOLERANCES (UNLESS SPECIFIED)			
$\frac{F}{P} = 0$		MM	INCH	
DIVISIONAL SYMBOLS	4 PLACES	±	±	
	3 PLACES	±	± 0.005	
	2 PLACES	± 0.13	± 0.01	
	1 PLACE	± 0.25	± 0.02	
	0 PLACES	±	±	
	ANGULAR TOL	± 0.5°		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES
			C-SIZE	130091
		EC NO: 670807	DRWN: DSOPPIN	2020/07/10
		CHK'D: DSOPPIN	APPR: HKNEELAND	2022/06/08
		INITIAL REVISION:	DRWN: KCOX01	2015/07/30
			APPR: JFMURPHY	2015/09/17
DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION
SD-130091-017		PSD	001	A1
MATERIAL NUMBER		CUSTOMER	SHEET NUMBER	
SEE TABLE		GENERAL MARKET	1 OF 1	