



.XX ±0.13 .XXX ±0.05

Å	

ISSUE NUMBER	
ORIGINAL	(1)

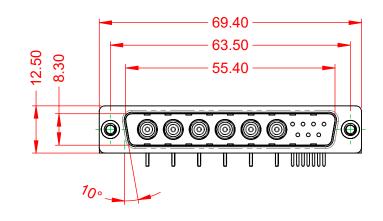




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, GOLD FLASH PLATED



POWER/CO-AX CONTACT RATING: (IF PRESENT)	50Ω (IMPEDANC
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONTA 10mΩ MAX.
INSULATOR RESISTANCE:	5000MΩ min.


DIELECTRIC WITHSTANDING VOLTAGE:

**OPERATING TEMPERATURE:** 

ICE) ACT

-55°C ~ 125°C

1000V AC rms



SW REFERENCE NO.: 629 COMBO ASSEMBLY						
COMBINATION D-SUB		COMBINATION D-SUB		DRAWN: C.B	DATE: JAN. 01/20	19
			DATE:			
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2		
TORONTO, ONTARIO CANADA	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS	DRAWING NUMBER: 629-13W	6240-5NC	ISSUE		
YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 629-13W	6240-5NC	1		



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

