



Mechanical Dimensions: Inches [mm]

Tolerances ± 0.012 [0.3] Unless Otherwise Specified

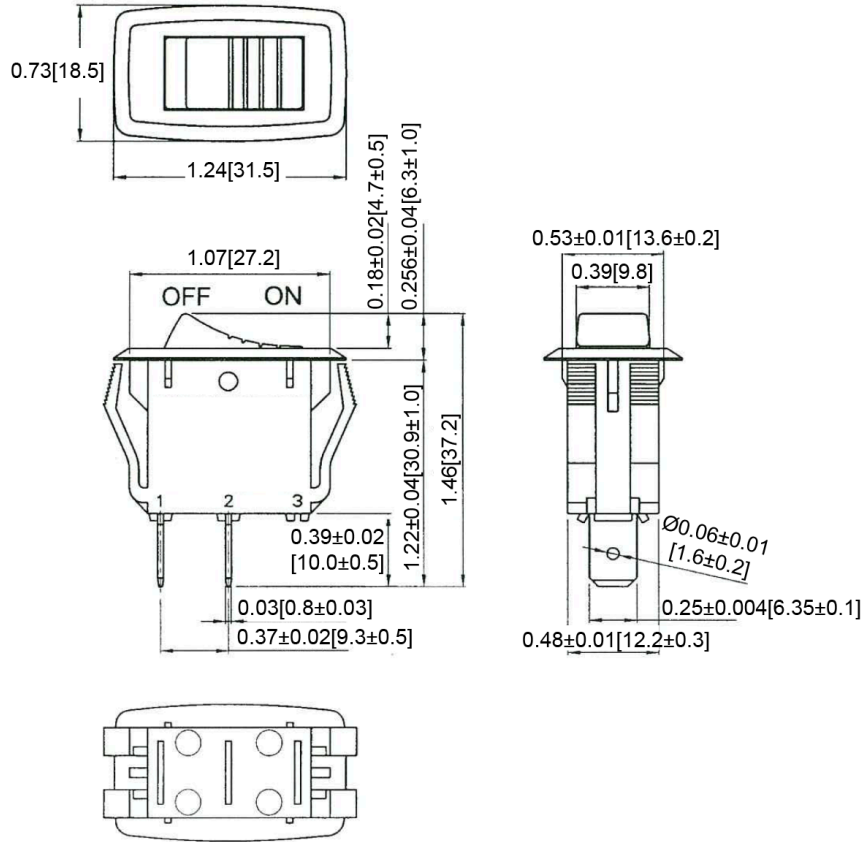


Mounting Hole

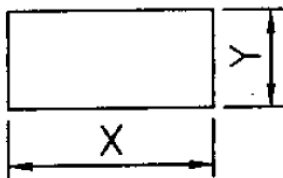

Thickness	X	Y
0.1[0.75~3.0]	1.0[27.6-0.1]	0.5[13.8+0.1]
0.1[3.0~4.0]	1.0[27.8-0.1]	0.5[13.8+0.1]
0.1[4.0~5.0]	1.1[28.0-0.1]	0.5[13.8+0.1]

Circuit Diagram

2P SPST OFF-ON



Electrical Specifications

Rating 16(4)A 125/250V AC 20A 125V AC 1/3HP, 10(4)A 250V AC 16A 250V AC 1/2HP

Contact Resistance 50m ohm Max

Insulation Resistance DC 500V 100M ohm Min

Dielectric Strength AC 1500V 1minute

Operation Temperature -25°C~85°C

Material Specifications

Frame Nylon#66, Black.

Actuator Black, Nylon#66+33%GF

Terminals Silver plated , Copper alloy

Rev	Date of issue	Revision Notes	Designed	Approved
B	02-26-2020	Initial Drawing	RC	OF