


molex

INSULATION DISPLACEMENT CABLE:
0.050" PITCH, 28 AWG, STRANDED EXTRUDED FEP

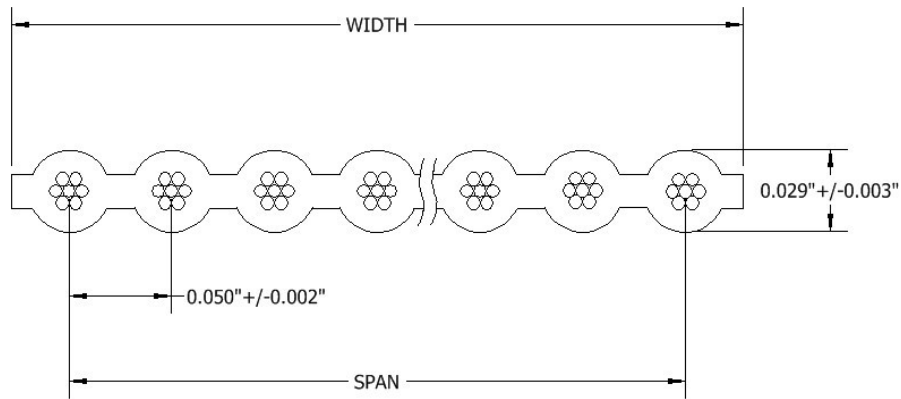

Cond. No.	Part Number	Span	Width
8	1000570393	0.350" ± 0.007"	0.400" ± 0.007"
10	1000570142	0.450" ± 0.007"	0.500" ± 0.007"
20	1000570163	0.950" ± 0.010"	1.000" ± 0.010"
26	1000570053	1.250" ± 0.010"	1.300" ± 0.010"
30	1000570181	1.450" ± 0.010"	1.500" ± 0.010"
34	1000570186	1.650" ± 0.010"	1.700" ± 0.010"

CHARACTERISTICS		
Conductor	28 AWG, 7/36, Silver Plated Copper	
Insulation	FEP	
Color	Red	
Impedance (ohms)	115 Unbalanced	165 Balanced
Capacitance (pF/ft)	10.5 Unbalanced	6.0 Balanced
Inductance (uH/ft)	0.14 Unbalanced	0.16 Balanced
Insulation Resistance (Mohm)	>500	
Voltage Rating	300V	
Temperature Rating	-55°C to 200°C	

STANDARD PACKAGING

100 ft./spool, 10 Ft. minimum length

UL STYLE 20424