


NOTES:

- |   |  |
|---|--|
| <p>1) MATERIAL: SEE TABLE</p> <p>2) FINISHES: SEE TABLE</p> <p>3) WRAP LABEL IS MARKED WITH P/N, DATE CODE VOLTAGE &amp; AMPERAGE</p> <p>4) MATES WITH: QUICK CHANGE RECEPTACLE</p> <p>5) ELECTRICAL DATA:<br/>         10AWG UL TYPE: TC-ER/STOOW STRANDED CABLE<br/>         MAX VOLTAGE: 600V<br/>         MAX CURRENT: 32A<br/>         PROTECTION IP67 (WHEN MATED)<br/>         TEMPERATURE RANGE: -20°C TO 105°C</p> | <p>6) PACKAGING:<br/>         CABLE ASSEMBLIES ARE BAGGED SEPERATLY IN POLY BAGS WITH BAR CODE LABEL ATTACHED TO OUTSIDE OF BAG.</p> <p>7) ASSEMBLY IS RoHS COMPLIANT</p> <p>8. XX REFERS TO CIRCUIT COUNT</p> |
|---|--|

PART NUMBER LEGEND

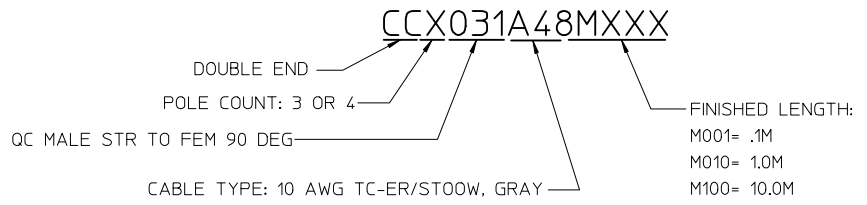

11	2	WARNING LABEL	VINYL	ORANGE/BLACK
10	1	WRAP LABEL	VINYL	BLACK/YELLOW
9	1	OVERMOLD, STRAIGHT	PVC	GRAY
8	1	COUPLING, MALE	ALUMINUM	CLEAR ANODIZE
7	XX	CONTACT PIN	Cu ALLOY	GOLD PLATED
6	1	INSERT, MALE	PVC	BLACK
5	1	OVERMOLD, 90 DEG.	PVC	GRAY
4	1	COUPLING, FEMALE	ALUMINUM	CLEAR ANODIZE
3	XX	CONTACT SOCKET	Cu ALLOY	GOLD PLATED
2	1	INSERT, FEMALE	PVC	BLACK
1	1	CABLE, 10 AWG TC-ER/STOOW (SEE NOTE 5)	PVC JACKET	GRAY
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

RELEASED	EC NO: IPG2016-1095	2016/02/09
DRWNR:STONE	CHKD:BRUPERT	2016/02/11
APPR:WOODMAN		2016/03/04
REV	DESCRIPTION	
A		

QUALITY SYMBOLS	$\nabla=0$ $\nabla=0$																		
GENERAL TOLERANCES (UNLESS SPECIFIED)	<table border="1"> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> <tr> <td>4 PLACES</td> <td>± .01</td> <td>± .0005</td> </tr> <tr> <td>3 PLACES</td> <td>± .01</td> <td>± .0005</td> </tr> <tr> <td>2 PLACES</td> <td>± .01</td> <td>± .001</td> </tr> <tr> <td>1 PLACE</td> <td>± 0.3</td> <td>± .012</td> </tr> <tr> <td>0 PLACE</td> <td>± .01</td> <td>± .0005</td> </tr> </table>		mm	INCH	4 PLACES	± .01	± .0005	3 PLACES	± .01	± .0005	2 PLACES	± .01	± .001	1 PLACE	± 0.3	± .012	0 PLACE	± .01	± .0005
	mm	INCH																	
4 PLACES	± .01	± .0005																	
3 PLACES	± .01	± .0005																	
2 PLACES	± .01	± .001																	
1 PLACE	± 0.3	± .012																	
0 PLACE	± .01	± .0005																	
ANGULAR ± 1°																			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS																			

DIMENSION STYLE		IN/MM	
SCALE	1:1	DESIGN UNITS	INCH
DRAWN BY		RSTONE	
DATE		2016/02/09	
CHECKED BY		BRUPERT	
DATE		2016/02/11	
APPROVED BY		BWOODMAN	
DATE		2016/03/04	
MATERIAL NO.		-	

THIRD ANGLE PROJECTION		
TITLE		QUICK CHANGE CORD ASSY MALE STR TO FEM 90 10 AWG PVC CABLE GRAY
DOCUMENT NO.		SD-130064-015
SHEET NO.		1 OF 1
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		