

COIL: @ +25 °C

RESISTANCE 1620 OHMS ± 10%

NOMINAL VOLTAGE 22.5-44.0 VDC

MUST OPERATE 14.3 VDC

MUST RELEASE 8.6 VDC MAX, 1.4 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 50 g's 11 MS. DURATION


TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 6 MS MAX.

RELEASE 5 MS MAX.

BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

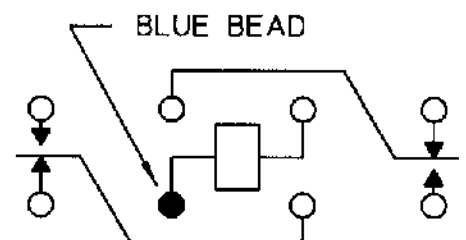

CONTACT RATING: LOW LEVEL TO 2A  
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 5/1/97 CK *[Signature]*

**COMMUNICATIONS**  
**INSTRUMENTS, INC.**

CUST. GENICOM  
 CUST. NO. 3SAV5134L3

TYPE "HMS" RELAY

HMS1205S02