


REVISIONS

REV	ECR	DESCRIPTION	DRAWN	DATE
1		ENGINEERING RELEASE	P. BURDGE	11/10/2020

-XX IN THE ENDING OF THE CABLE PART NUMBER IS CALLING OUT THE LENGTH OF THE ASSEMBLY FROM CENTER TO MATING FLANGE OF CONNECTORS. EXAMPLES SHOWN BELOW:

LTI P/N: CB1.37-IPX4LLK-SARF3OGTX9-6IN (6 INCHES)
 CB1.37-IPX4LLK-SARF3OGTX9-8IN (8 INCHES)

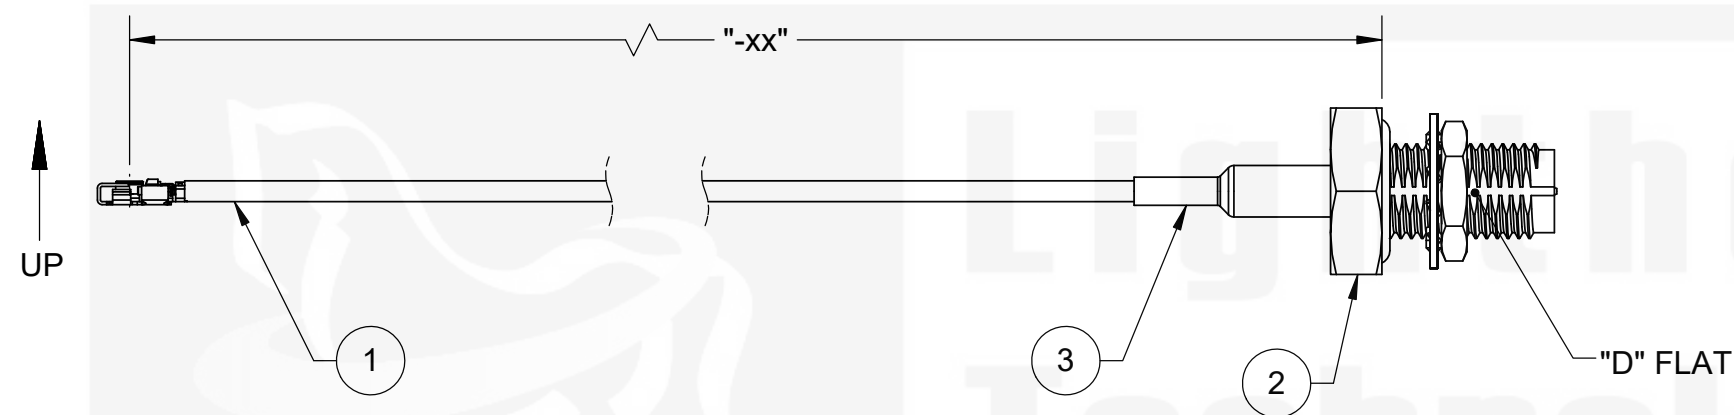

ITEM	PART NUMBER	DESCRIPTION	QTY
1	IPX4LLK-137	IPX4L (MHF4L), LOCKING, 1.37MM COAX	1
2	SASRF13ROGT-113-X9	SMA, REV POL JACK, BLKHD, O-RING, IP-67, CABLE CRIMP	1
3	1635F-1/8"	.125 (1/8) DIA, .75 LENGTH, GREEN	1



SCALE: NONE

IPX® AND MHF® ARE REGISTAERED TRADEMARKS OF I-PEX CO., LTD. CORPORATION

DO NOT SCALE DRAWING		<p>Lighthouse Technologies San Diego, CA WWW.RFCONNECTOR.COM</p>
TOLERANCES UNLESS OTHERWISE SPECIFIED		
DIMENSIONS ARE IN MILLIMETERS X = ±0.5 X.X = ±0.25 X.XX = ±0.13 ANGLE = ±30'		TITLE: CABLE ASSEMBLY, I-PEX LOCKING, (MHF4L) R/A JACK, CRIMP TO SMA, RP JACK, REAR BULKHEAD, O-RING, IP-67, 1.37MM COAX
CUSTOMER APPROVAL SIGN / DATE:		SIZE: B PART/DWG. NO: CB1.37-IPX4LLK-SARF3OGTX9-xxIN REV: 1
ENG APPR. CHECKED DRAWN: P. BURDGE NAME:	11-10-2020 DATE:	SCALE: 2:1 FILE NAME: SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL

UNLESS OTHERWISE SPECIFIED: THIS DOCUMENT CONTAINS LIGHORSE TECHNOLOGIES INFORMATION. REPRODUCTION, USE, DISCLOSURE OR TRANSMITTAL OF ALL OR ANY PART OF THIS DOCUMENT IS PROHIBITED EXCEPT TO THE EXTENT APPROVED IN WRITING BY AN AUTHORIZED REPRESENTATIVE OF LIGHORSE TECHNOLOGIES. LIGHORSE TECHNOLOGIES RESERVES ALL RIGHTS UNDER PATENTS, TRADEMARKS, COPY RIGHTS AND TRADE SECRETS. COPY RIGHTS OF LIGHORSE TECHNOLOGIES 2011, ALL RIGHTS RESERVED.

