

specifications



Consumption	Base	Voltage	CRI	Lens	Heat Sink	L70 hours	Beam Angle	Ambient Temp (F)	Power Factor	UL listing	THD
2.6 W	BA15S	10-30 V ⚡	> 80	n/a	aluminum	50,000	360°	-40° - 113°	> 0.9	IP40	< 20%

select your lamp

Part Number	Color Temp	Lumen Output	Efficacy
GI-1156C-W250-30	3000K	308	118 lm / W
GI-1156C-C250-30	5000K	370	142 lm / W

other

Dimensions	Warranty	Gross Weight	Case QTY
1.44" x 0.71"	6 years	4.59 ounces	1 pcs

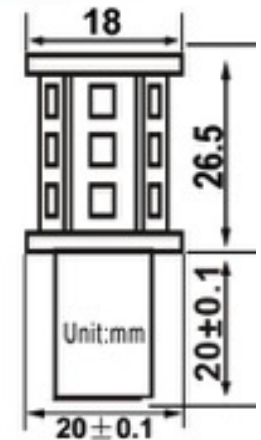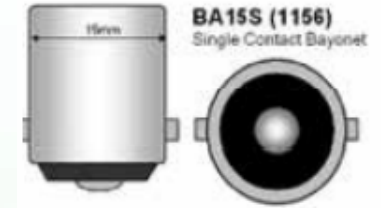

- Features
- No UV or IR radiation
 - 50,000 hour LED lifespan based on IES LM-80 results and TM-21 calculations
 - 90% energy savings compared to halogen lamps

Not all product variations listed on this page may be DLC qualified. Visit www.designlights.org/search to confirm qualification.

