


Ultra-Low Phase Noise True SineWave SAW Based VCISO

CVCSO-914 Model
9×14 mm SMD, 5.0V, SineWave

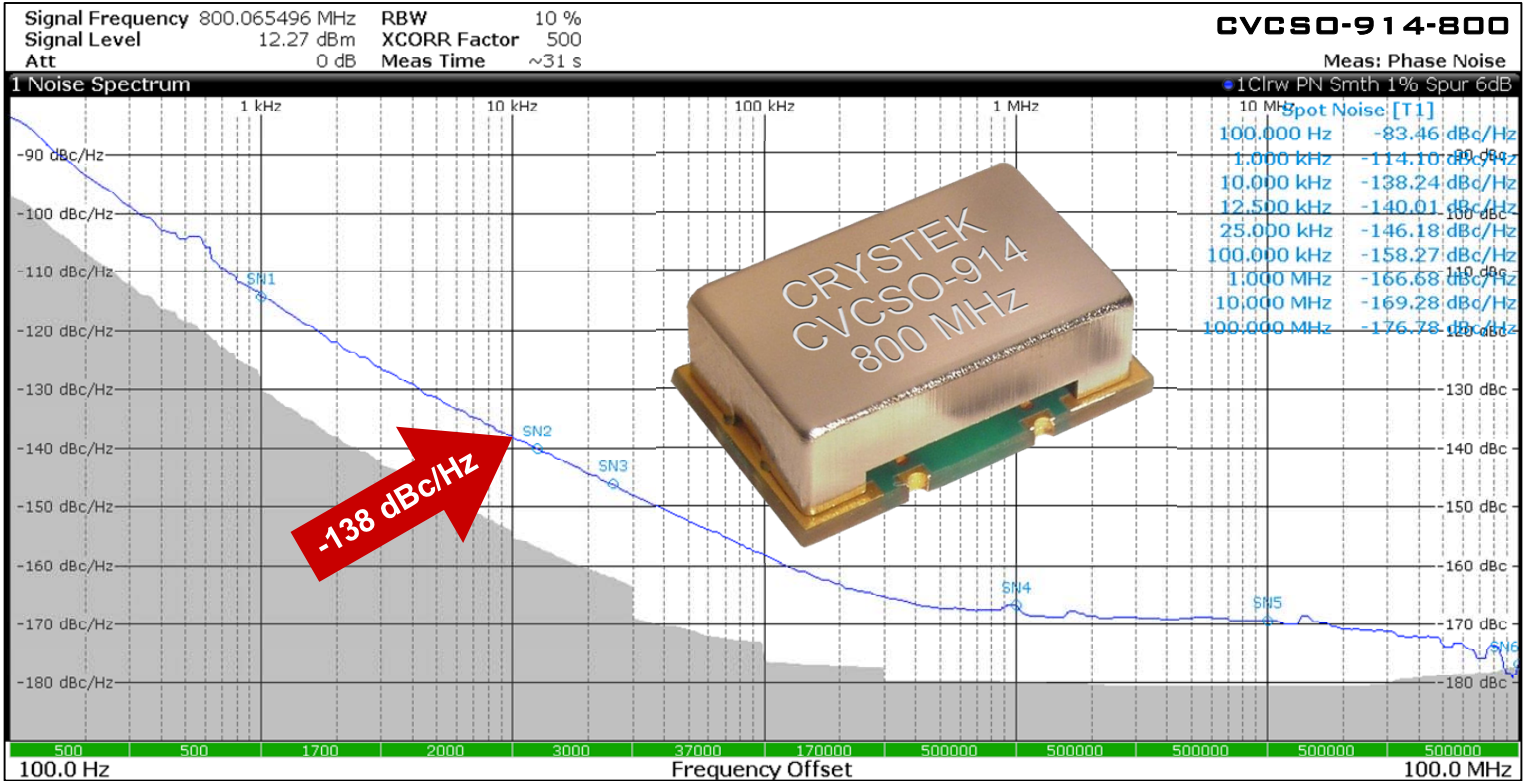

Model CVCSO-914 is a voltage-controlled SAW (surface acoustic wave) Clock Oscillator (VCISO). SAW crystal technology provides low-noise and low-jitter performance with true sinewave output. Features include -135 dBc/Hz phase noise at 10 kHz offset at 1 GHz, 5V input voltage, and 9×14 mm SMT package. The oscillator has no sub-harmonic and the second harmonic is typically -20 dBc.

Applications include PLL frequency translation, test and measurement, avionics, point-to-point radios, and multi-point radios.

Rev: X
Date: 02-Feb-2022
Page 1 of 4



Ultra-Low Phase Noise True SineWave SAW Based VCISO

CVCSO-914 Model


9×14 mm SMD, 5.0V, SineWave

Frequency Range:	500.000 MHz to 1000 MHz
Temperature Range:	0°C to +70°C
CVCSO-914A option	0°C to +50°C
CVCSO-914E option	0°C to +85°C
CVCSO-914M option	-20°C to +70°C
CVCSO-914X option	-40°C to +85°C
Storage:	-40°C to 90°C
Input Voltage:	5.0V ±0.25V
Control Voltage Range:	0V to 5.0V
Tuning Sensitivity (Kv):	+120 ppm/V Typical
Settability At Nominal (25°C):	1.5V +0.5V -1.0V
Frequency vs Temperature:	±200ppm Typical
Input Current:	25mA Typical, 35mA Max



Output:	True SineWave
Pullability APR:	±50ppm Min
Linearity:	±20% Max
Output Power:	+10dBm Min into 50 Ω Load
Start-Up Time:	2ms Typical, 10ms Max
2 nd Harmonic:	-20dBc Typical, -15dBc Max
Sub-Harmonics:	None
Modulation BW:	>20kHz @ -3dB


G-sensitivity:	0.9×10⁻⁹ per G
Weight:	0.816 g

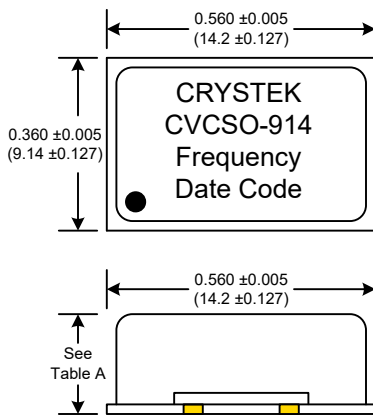


Package Height Options (Max)

	inches	mm
Standard	0.210	5.33
Option L	0.135	3.43

Table A

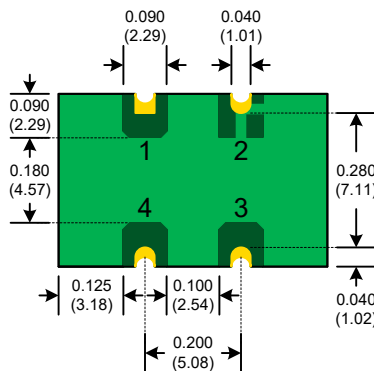

SUGGESTED PAD LAYOUT



PAD FINISH: Immersion Gold (ENIG); 5 micro inches maximum

Pad	Connection
1	Volt. Control
2	GND
3	Output
4	Vdd

Rev: X
Date: 02-Feb-2022
Page 2 of 4



Ultra-Low Phase Noise True Sine Wave SAW Based VCISO

CVCSO-914 Model
9x14 mm SMD, 5.0V, SineWave

Crystek Part Number Guide

CVCSO - 914 X L - 640.000


#1 #2 #3 #4 #5

- #1 Crystek Saw Voltage Controlled Oscillator
- #2 Model 914
- #3 Temperature Range (X = -40/85°C) (M = -20/70°C)
(Blank = 0/70°C)
- #4 Height (L = 0.135") (Blank = 0.210")
- #5 Frequency in MHz: 3 or 6 decimal places


Available Frequencies (MHz):

640.000	916.000
800.000	1000.000
840.000	

Custom Frequencies Available with NRE Fee

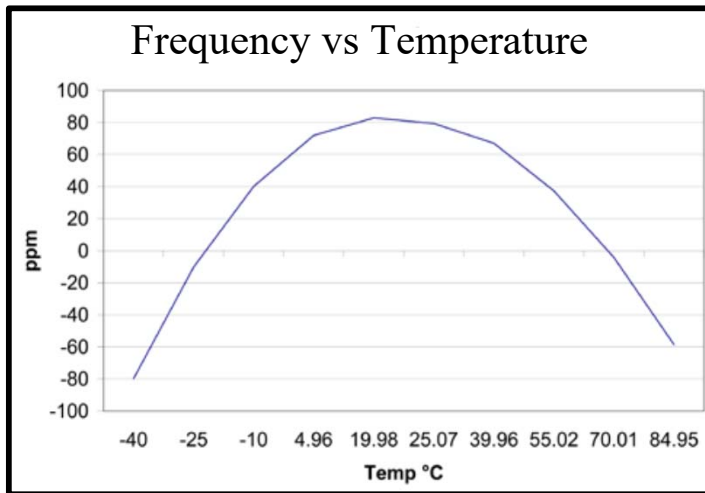

RECOMMENDED REFLOW SOLDERING PROFILE

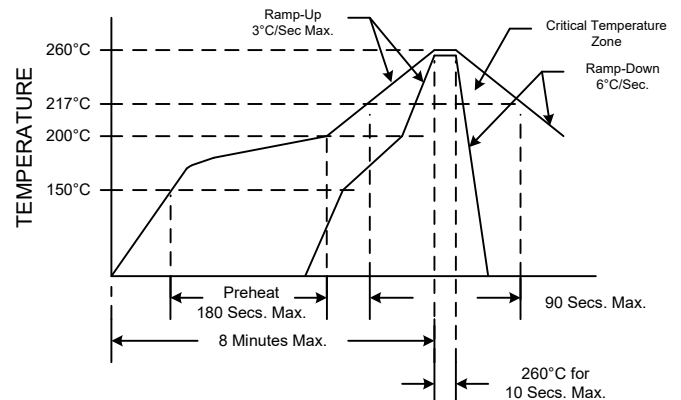

Parameter	Conditions
Mechanical Shock	MIL-STD-883, Method 2002, Condition B
Mechanical Vibration	MIL-STD-883, Method 2007, Condition A
Solderability	MIL-STD-883, Method 2003
Solvent Resistance	MIL-STD-202, Method 215
Resistance to Soldering Heat	MIL-STD-202, Method 210, Condition I or J
Thermal Shock	MIL-STD-883, Method 1011, Condition A
Moisture Resistance	MIL-STD-883, Method 1004

Rev: X
Date: 02-Feb-2022
Page 3 of 4

Crystek Corporation reserves the right to make changes to its products and/or information contained herein without notice.
No liability is assumed as a result of its use or application.




CRYSTEK
CRYSTALS
A DIVISION OF CRYSTEK CORPORATION



*Ultra-Low Phase Noise
True Sine Wave
SAW Based VCISO*

CVCSO-914 Model
9x14 mm SMD, 5.0V, SineWave

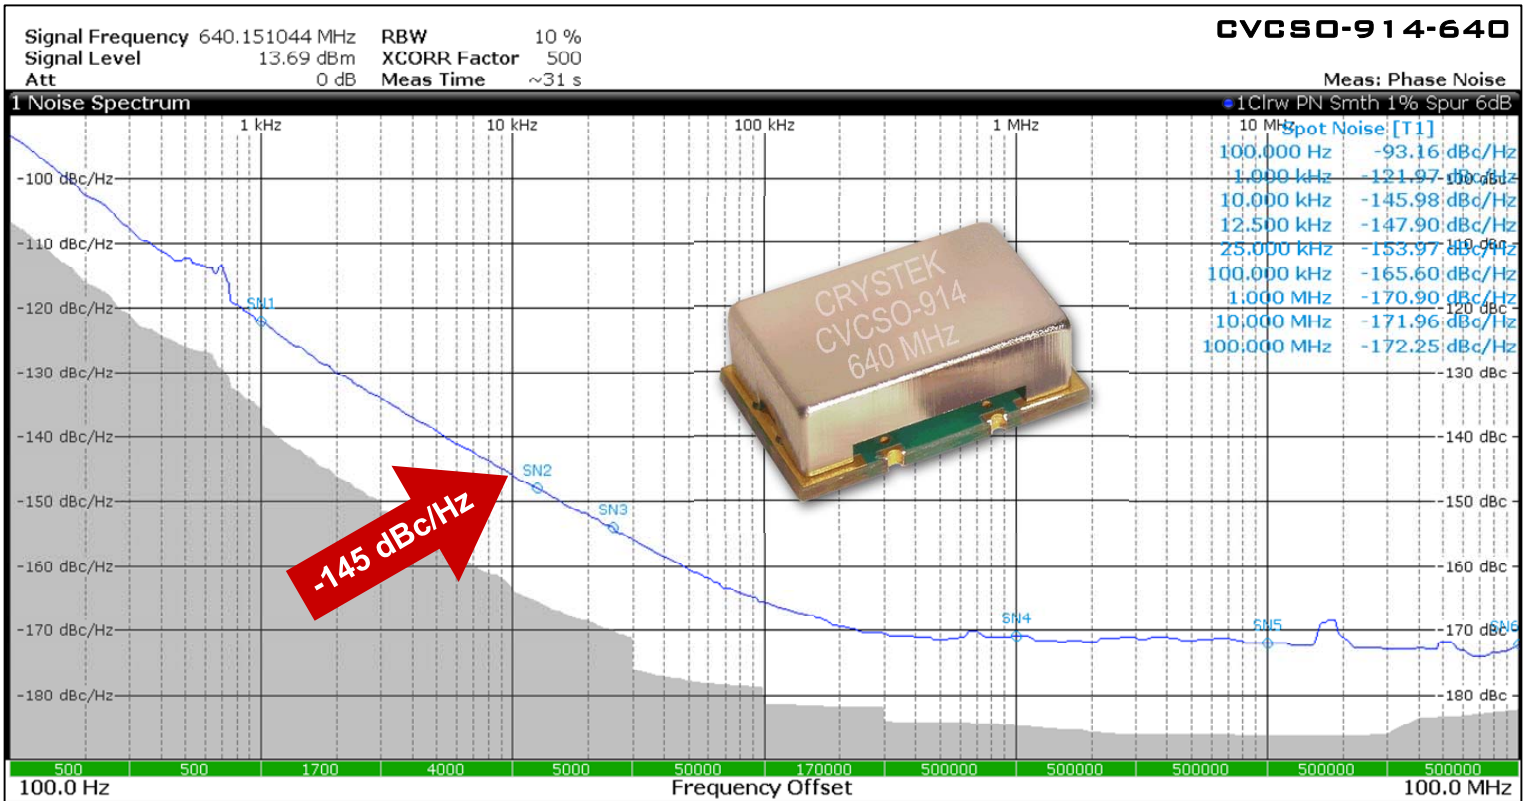

Rev: X
Date: 02-Feb-2022
Page 4 of 4