



S21 TRANS LOG MAG.  
▶ 0.000 dB 0.200 dB/DIV

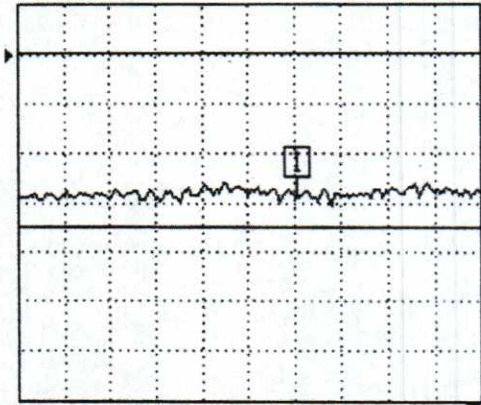


33.000000000 GHz 37.000000000

S11 REFL LOG MAG.  
▶ 0.000 dB 5.000 dB/DIV

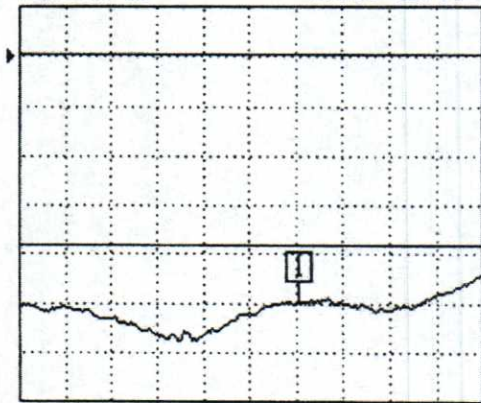


33.000000000 GHz 37.000000000

S22 REFL LOG MAG.  
▶ 0.000 dB 5.000 dB/DIV

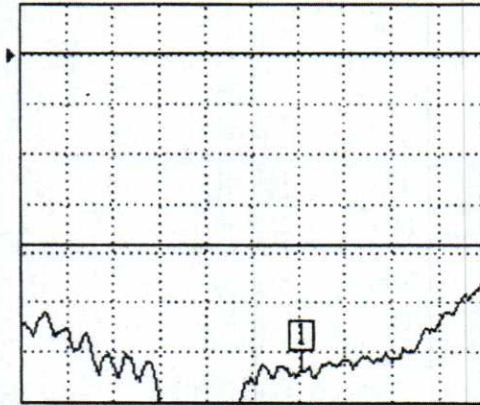

33.000000000 GHz 37.000000000

S12 TRANS LOG MAG.  
▶ 0.000 dB 5.000 dB/DIV

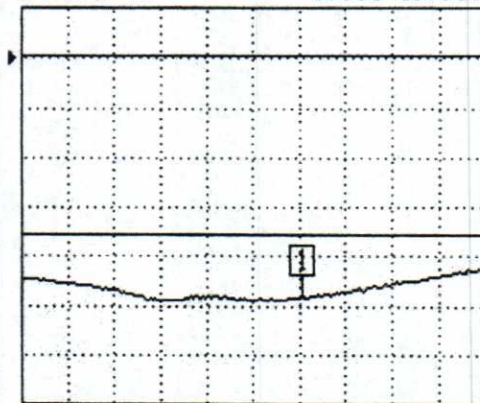

33.000000000 GHz 37.000000000

CH 1 - S21  
0.0000 mm REF  
0.000 dB OFFSET  
0.00° OFFSET

MARKER 1  
35.440000000 GHz  
-0.586 dB

MARKER TO MAX  
▶ MARKER TO MIN

MARKER READOUT  
FUNCTIONS

D3C3337 Circulator

Isolation: 18 dB Min  
Insertion Loss: 0.70 dB Max  
VSWR: 1.25:1 Max  
K-F Connectors