


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR SHOWN WITHOUT WRITTEN PERMISSION.

ITEM	CONNECTOR PART NO.	DESCRIPTION
1	SPND-001T-C0.5	PNI CONNECTOR - FEMALE CONTACT
2	SPNI-001T-P0.5	PNI CONNECTOR - MALE CONTACT
3	UL1061, 22 AWG	BLACK

Applicable Housings				
NO. OF CIRCUITS	PLUG HOUSING (FOR FEMALE CONTACT) PART NO.	SOCKET HOUSINGS (FOR MALE CONTACT)		OPTIONAL RETAINER
		WITHOUT PANEL LOCKS	WITH PANEL LOCKS	
2	PNIRP-02V-S	PNIRR-02VF	PNIRR-02V	PNIS-02V
3	PNIRP-03V-S	PNIRR-03VF	PNIRR-03V	PNIS-03V
4	PNIRP-04V-S	PNIRR-04VF	PNIRR-04V	PNIS-04V
5	PNIRP-05V-S	PNIRR-05VF	PNIRR-05V	PNIS-05V
6	PNIRP-06V-S	PNIRR-06VF	PNIRR-06V	PNIS-06V
8	PNIRP-08V-S	PNIRR-08VF	PNIRR-08V	PNIS-08V
10	PNIRP-10V-S	PNIRR-10VF	PNIRR-10V	PNIS-10V

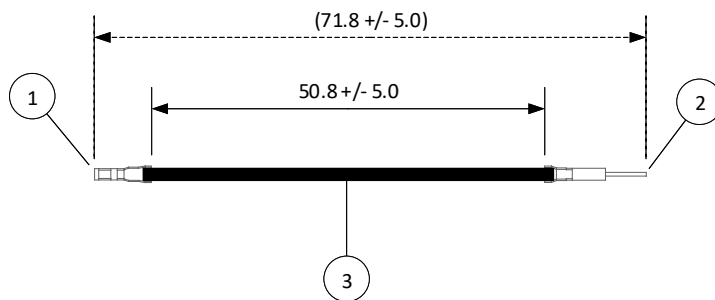

SCALE		1:1	
DIMENSIONS		DESCRIPTION	
All dimensions are in MM with a tolerance of +/- 3.0 unless otherwise specified.		2.0 mm Pitch PNI Series Standard Leads - 2" Inside Length DOUBLE-END LEADS, F-M	
DRAWN BY		ASSEMBLY PART NO.	
STEVEN PILKINGTON		ASPNDSPNI22K51	
CHECKED BY		DRAWING NO. & REVISION	DATE
JUSTIN BAKER		GAM-241	4/6/2017

REV.	DESCRIPTION	DATE	BY

4

3

2

1

D

C

B

A

D

C

B

A