


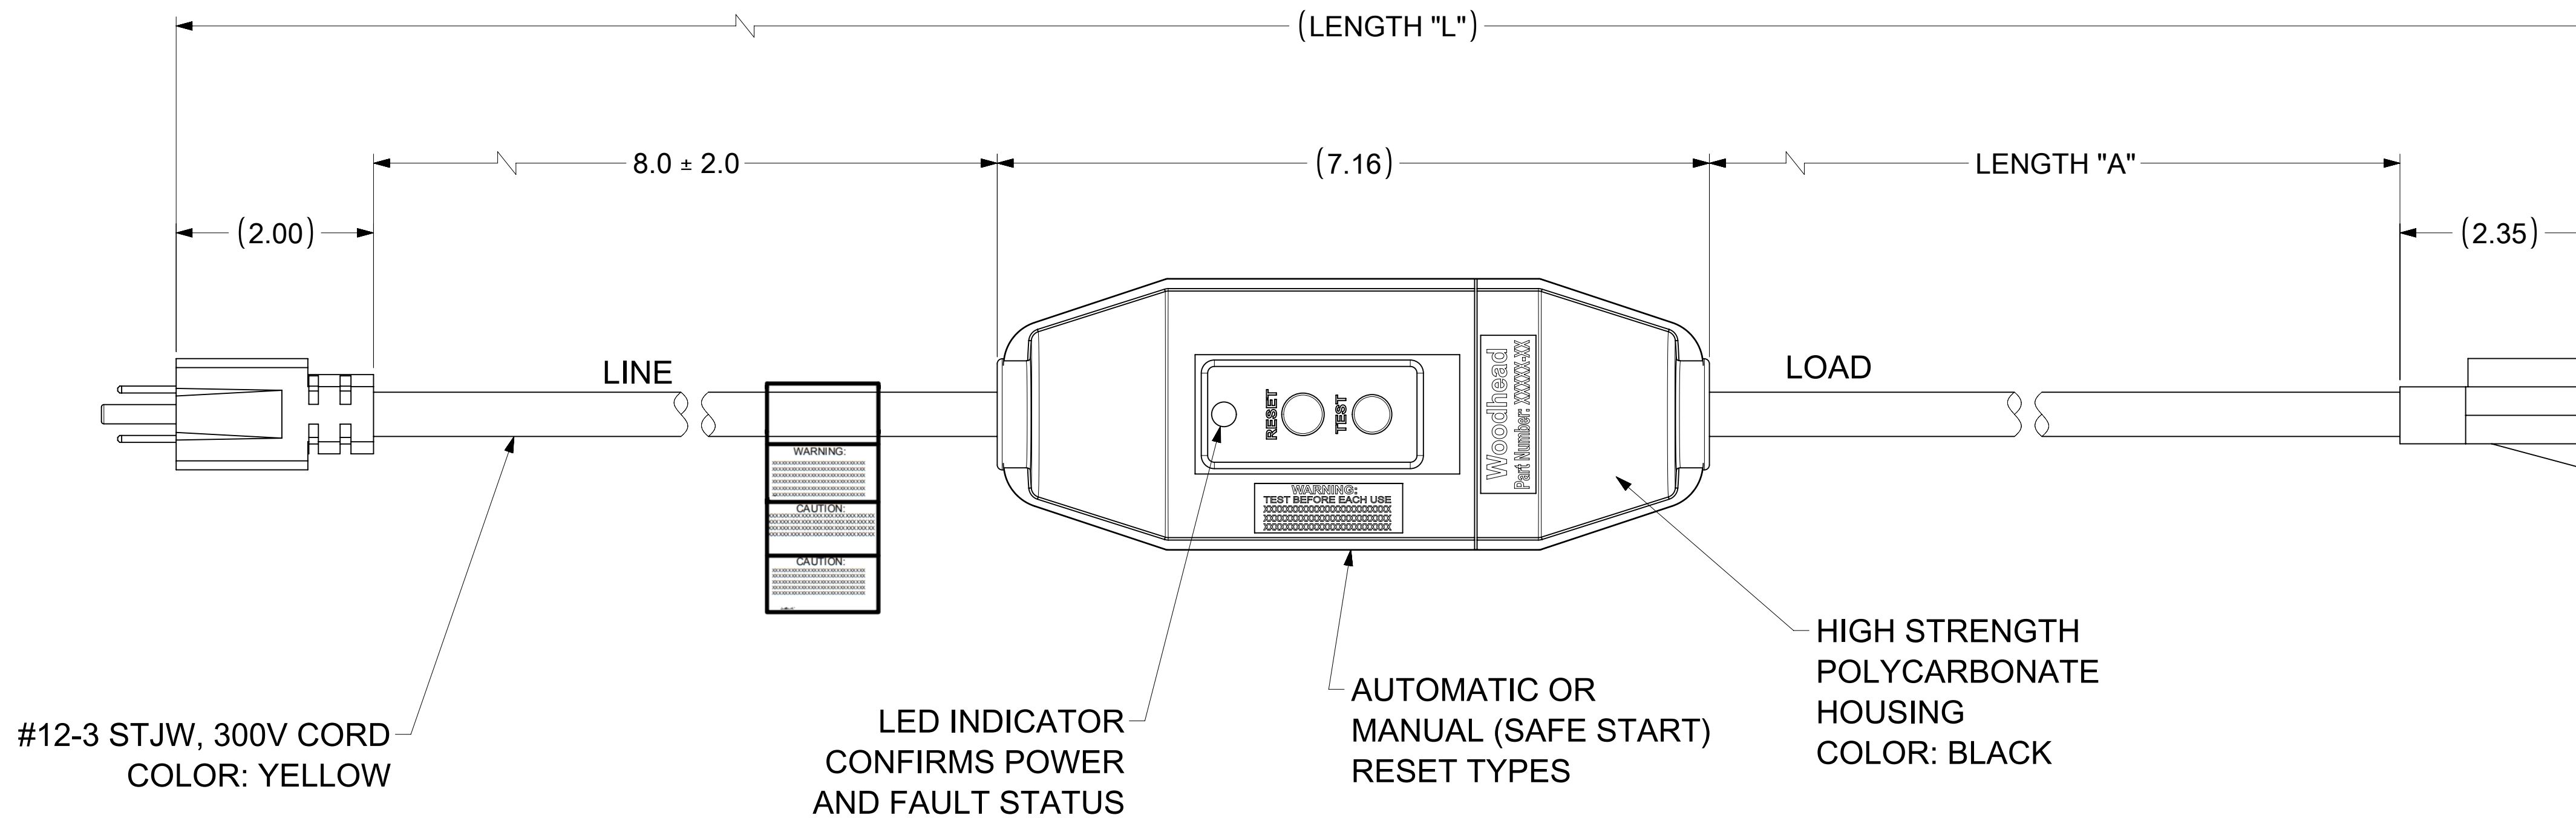
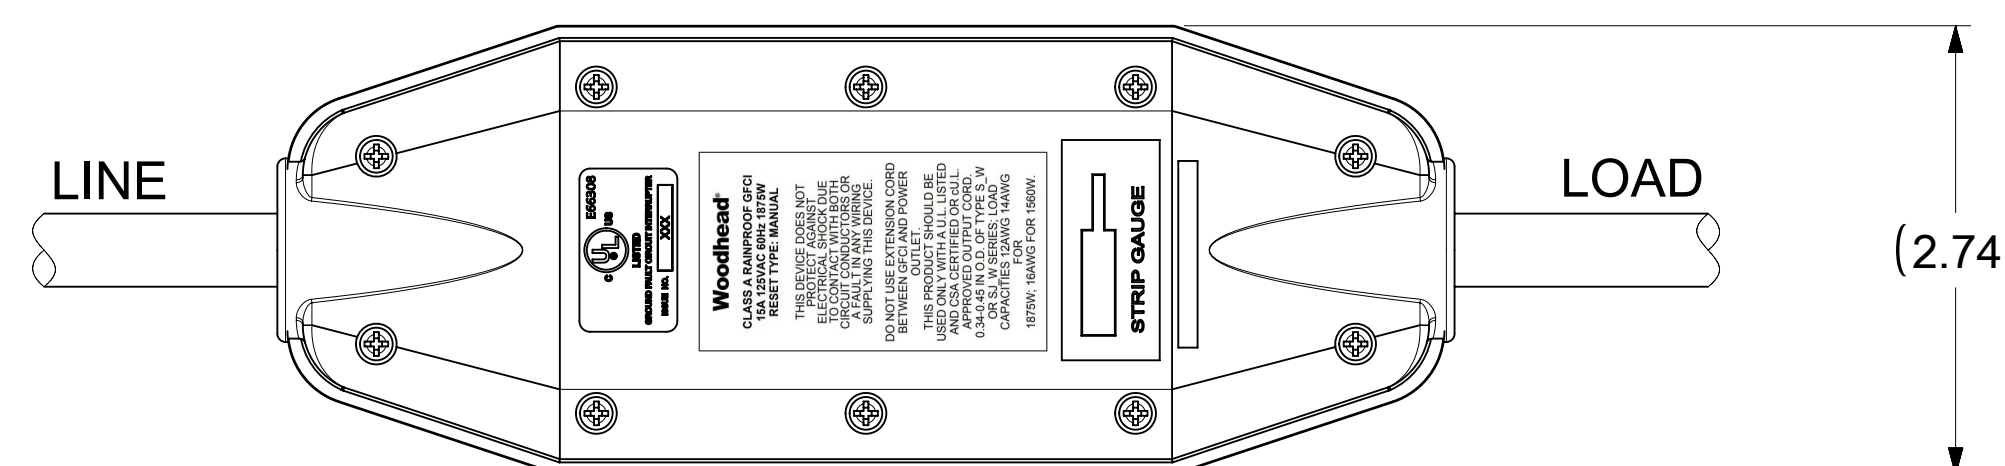


NEMA 5-15P  
MOLDED PLUG  
COLOR: BLACK

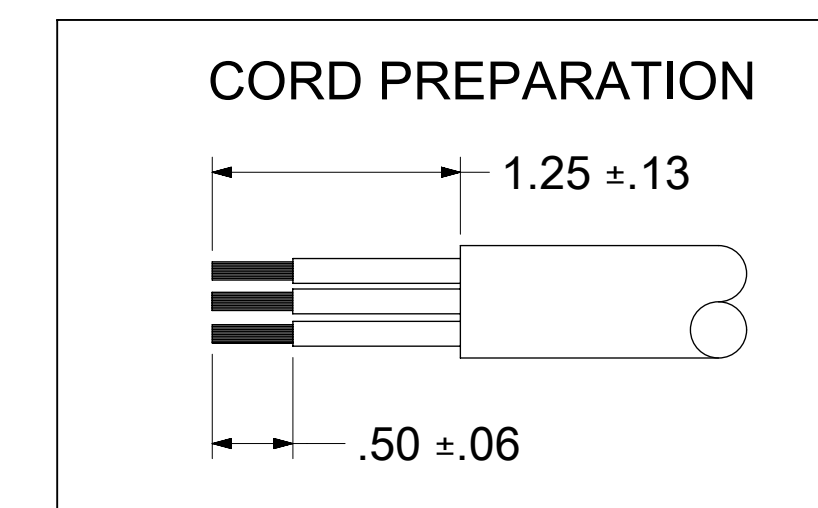

NEMA 5-15R  
MOLDED CONNECTOR  
COLOR: BLACK

#12-3 STJW, 300V CORD  
COLOR: YELLOW

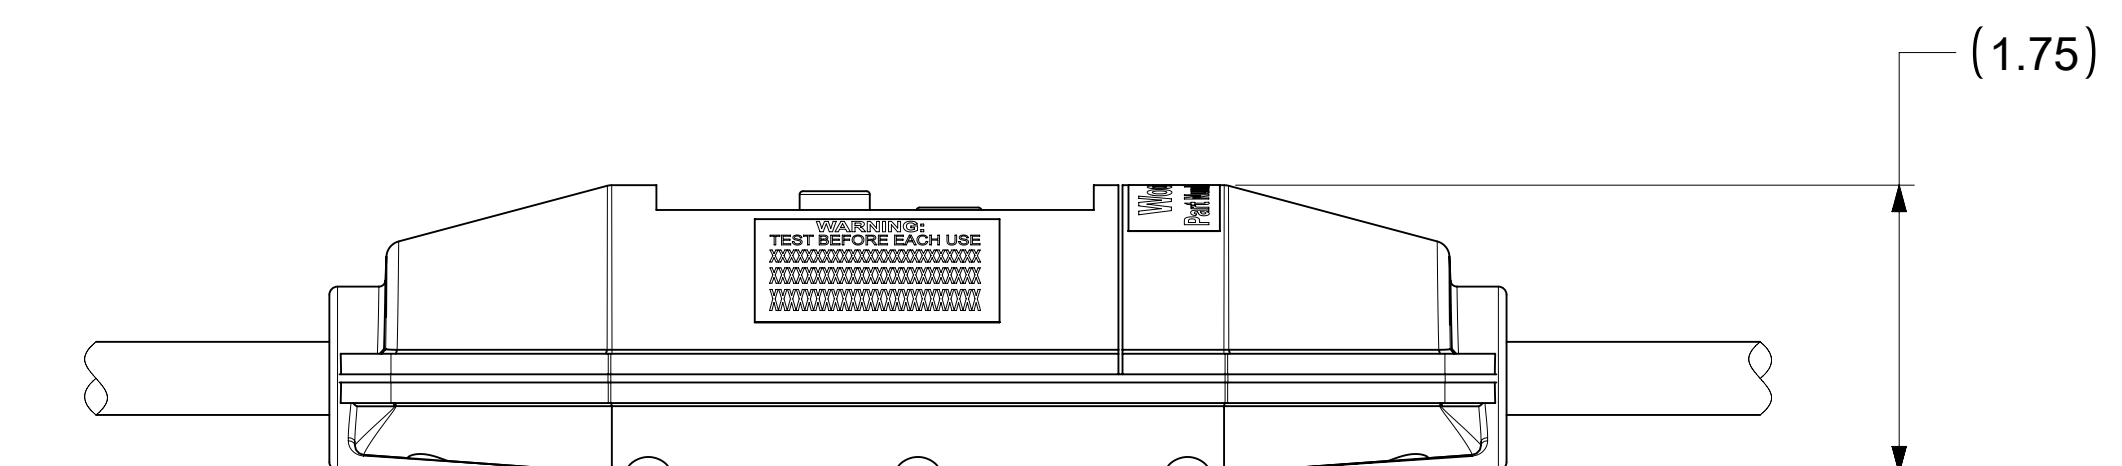

MATERIAL NO.	ENGINEERING NO.	LENGTH "L"	LENGTH "A"	POWER-UP
1301530020	15050-1A	2 FT 7.5 IN	1 FT ± 1 IN	AUTO
1301530037	15050-6A	7 FT 7.5 IN	6 FT ± 2 IN	AUTO
1301530023	15050-25A	26 FT 7.5 IN	25 FT ± 2 IN	AUTO
1301530031	15050-50A	51 FT 7.5 IN	50 FT ± 4 IN	AUTO
1301530021	15050-1M	2 FT 7.5 IN	1 FT ± 1 IN	MANUAL
1301530038	15050-6M	7 FT 7.5 IN	6 FT ± 2 IN	MANUAL
1301530024	15050-25M	26 FT 7.5 IN	25 FT ± 2 IN	MANUAL
1301530032	15050-50M	51 FT 7.5 IN	50 FT ± 4 IN	MANUAL

**TECHNICAL:**  
 LISTED: UL AND cUL  
 RATED SUPPLY VOLTAGE: 120 VAC  
 RATED CURRENT: UP TO 15 AMPS OR CABLE RATING  
 RESET TYPE: AUTOMATIC OR MANUAL  
 OPERATING FREQUENCY: 60 Hz  
 TYPE: CLASS A  
 GROUND TRIP CURRENT: 4-6 mA  
 OVERLOAD CURRENT: 90 AMP 125 VAC  
 INSULATION VOLTAGE: 1,500 VRMS - 1 MINUTE  
 ENDURANCE OPERATIONS: 3000 OPERATIONS

FUNCTIONAL SYMBOLS $\nabla_A = 0$ $\nabla_C = 0$ $\nabla_D = 0$ DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		DIMENSION UNITS: INCH SCALE: NTS		CURRENT REV DESC:  EC NO: 686220 DRWN: VBASUTHKARP 2021/11/11 CHK'D: DNGUYEN62 2021/12/01 APPR: HKNEELAND 2022/01/04 INITIAL REVISION: DRWN: HRUIZ01 2013/02/06 APPR: JFMURPHY 2015/04/20						
	GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± 0.5°		4 PLACES ± 3 PLACES ± 2 PLACES ± 0.13 1 PLACE ± 0.25 0 PLACES ±						120V 15A INLINE GFCI W/ MOLDED PLUG & CONN NEMA 5-15 PRODUCT CUSTOMER DRAWING		
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION			DRAWING SERIES: D-SIZE 130153		DOCUMENT NUMBER: SD-130153-013		DOC TYPE: PSD DOC PART: 001 REVISION: A1	
						MATERIAL NUMBER: SEE TABLE CUSTOMER: NORTH SHORE SAFETY		SHEET NUMBER: 1 OF 1			