
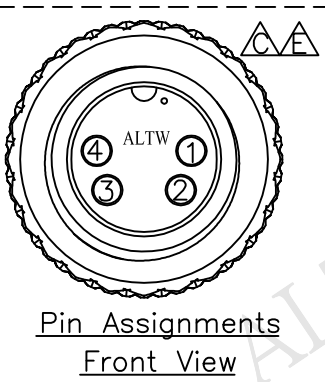
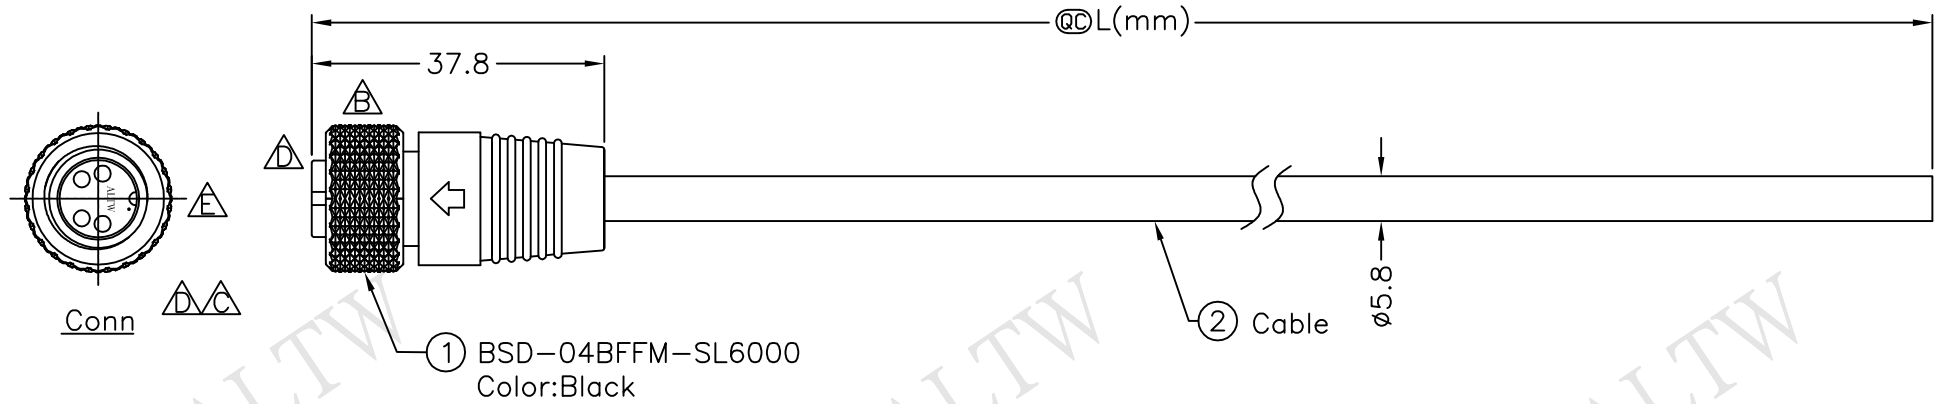


REV.	ECN NO.	DATE	SIGN.	DESCRIPTION
C	LEN-920127~30	2008/10/06	Li Xiu Zhi	Change Front View
D	LEN-080135	2010/08/17	Kevin Wang	Modiyf The Front View and Note
E	LEN1710110~15	2017/01/17	Ruru	Change Logo



Shield	Drain	地線
4	Yellow	黃
3	Red	紅
2	Green	綠
1	White	白
Conn	Wire Color	Pin Out

BSD-04BFFM-SL6AXX  
 XX:01~99Meter  
 01:01Meter  
 02:02Meters  
 ...  
 99:99Meters  
 Cable Length(L):01~99Meters

- Note:
- \* @C Important Dimension To Check.
  - \* Waterproof Rate: IP66
  - \* Housing: Nylon+GF,Black
  - \* Screw Nut: Brass, Nickel Plated
  - \* Shell: Brass, Nickel Plated
  - \* Ring: EPDM,Black
  - \* Brass Shell: Brass.
  - \* Cable: UL2464 20AWG\*4C+Drain+Al/My Black,PVC Jacket UV Resistant, OD=5.8
  - \* Cable Length Tolerance:01M:±40mm  
 02M~05M:±60mm  
 06M~10M:±100mm  
 11M~30M:±200mm  
 31M~99M:±500mm

UNIT:mm	
TOLERANCE	±0.5mm

TITLE BSD-04BFFM-S180 To Cable	
SCALE Free	SHEET 1 OF 1
REV. E	SIZE A4
QC : Inspection Item	

**Amphenol LTW**  
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Ruru	DATE 2017/01/17
DWG NO BSD-04BFFM-SL6AXX	CHECKED BY Rita	DATE 2017/01/17
CUSTOMER ALTW	APPROVED BY Max	DATE 2017/01/17

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

